

S3674 Series Vector Network Analyzer



S3674 Series Vector Network Analyzer

Saluki S3674 Series vector network analyzer is the peak of technological innovation, which can easily deal with the severe challenges brought by semiconductor chip testing, material testing, antenna testing, high-speed cable testing, microwave component testing and so on. Excellent RF characteristics, flexible hardware configuration and rich software functions complement each other, only one connection can be completed in a variety of measurement tasks. Innovative human-computer interaction design can help you complete the required measurement settings quickly and conveniently, and the large touch screen brings you a flexible and efficient operation experience.

Main Features

- 500Hz~110GHz broad band coaxial coverage
- 30 MHz IF bandwidth, measurement points 200001
- Ultra-fast scanning speed, 140dB large dynamic range
- It has 21 functions, such as pulse S-parameter measurement, frequency conversion device measurement, gain compression measurement, noise coefficient measurement, frequency spectrum measurement, signal integrity measurement, total harmonic distortion measurement, active intermodulation distortion measurement, and automatic fixture removal
- SCPI instruction synchronization record, script generated with one key
- A 15.6-inch multi-parameter display on the same screen, with multi-touch operation


CONTENT

Ultra Wide Band Vector Network Analyzer	1
Pulse S-parameter Measurement	3
Mixer/Converter Scalar Measurement	5
Mixer/Converter Vector Measurement	6
Gain Compression Measurement	7
Noise Figure Measurement	9
Spectrum Analysis Measurement	10
Analysis of the signal integrity measurements	11
Analysis of the total harmonic distortion (THD) measurement	12
Automatic Fixture Removal	13
The Ultimate User Experience	15
Technical Specifications	17
Order Information	39

Ultra Wide Band Vector Network Analyzer

From 500 Hz to 110 GHz for coaxial coverage

Ultra-wide frequency coverage, low frequency expansion to 500Hz, the highest test frequency up to 110GHz.

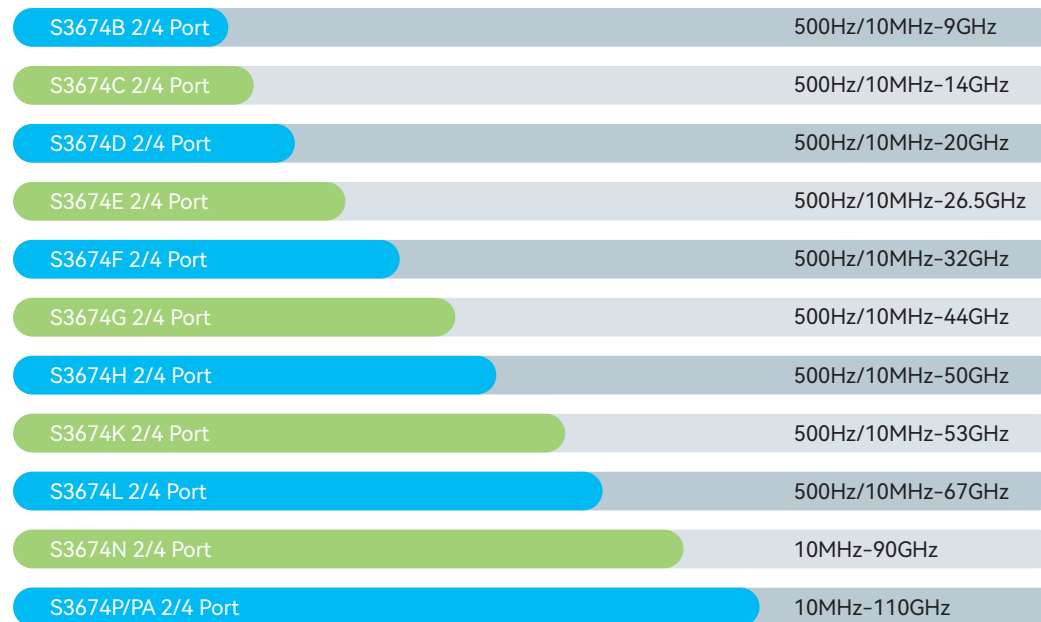

Excellent performance

- Faster measurement speed, improve the production efficiency;
- Higher measurement accuracy, to meet the measurement requirements of higher specification products;
- Up to 30 MHz IF bandwidth, can achieve fast test and narrow pulse test;
- The maximum number of 200001 measurement points can bring more refined measurement results;
- Using ultra-wide band base wave mixing technology and source output power improvement technology, we greatly improve the dynamic range, and the optimal dynamic range can reach 140dB, providing more accurate and reliable measurement results for the test of large dynamic devices such as filters.

Rich Features

With pulse S parameter measurement, frequency conversion device measurement, gain compression measurement, noise coefficient measurement, spectrum measurement, signal integrity measurement, total harmonic distortion measurement, active intermodulation distortion measurement, automatic fixture removal of 21 kinds of function, combined with the specific application form system level test solution, accurate joint user needs of different industries.




Pulse S-parameter Measurement

Built-in pulse modulation, the test is fast and simple

Built-in 4-way pulse generator for internal source modulation, IF gate control, and output from the rear panel. The pulse width and time delay of each pulse generator can be set independently.

Source modulation sources include multiple states such as rear panel input, internal pulse generator, normally open and normally closed. The source of the vector network analyzer can be modulated by external pulses or modulated by an external modulator and measured by triggering the synchronization mode. The pulse S parameter measurement function provides strong support for the test of radar T / R components and antenna signal and transceiver module.

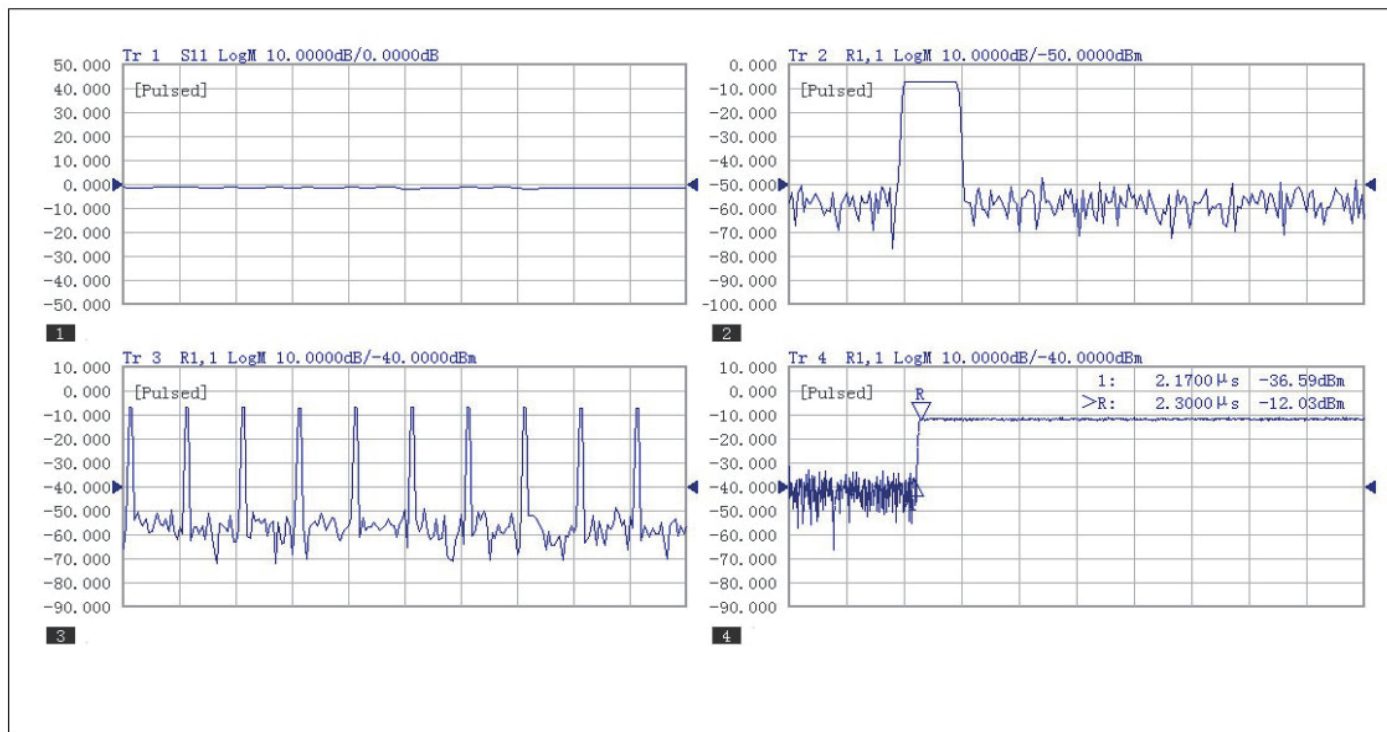

Excellent pulse test capability

- Pulse period of up to 70s
- The pulse resolution was as low as 8.3ns
- Broadband synchronous pulse test pulse width <42ns
- Internal pulse synchronization or external pulse synchronization mode
- 7 source modulation modes, such as external and internal pulses
- 4 pulse generators with pulse width and independent delay
- Automatic broadband synchronous measurement and narrow-band asynchronous measurement function
- Adaptive narrow-band filter to improve the narrow-pulse test capability
- 3 for triggering input and output modules to provide flexible system coordination function
- Functions of sweeping pulse S parameter test, pulse envelope test and pulse point test

Pulse SetupChannel1

Basic Setting				Profile																															
OFF	☐	PRI	1.000000000000	ms																															
Pulse Measurement	☐	PRF	1.000000	kHz																															
Profile	☒	Width	100.0000000000	μs																															
Source Mod	Pulse1	Main Delay	0.000	ps																															
Options				Detection Method																															
Autoselect Source	☒	Enable Optimize PRF	☐																																
Autoselect Width&Delay	☒	Auto Set IF Gain	☒																																
IFBW	15	kHz																																	
<table border="1"> <thead> <tr> <th>Name</th> <th>Source</th> <th>Width</th> <th>Delay</th> <th>Atten</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>Pulse0</td> <td>8.333 ns</td> <td>20.000 μs</td> <td>0</td> </tr> <tr> <td>B</td> <td>Pulse0</td> <td>8.333 ns</td> <td>20.000 μs</td> <td>0</td> </tr> <tr> <td>C</td> <td>Pulse0</td> <td>8.333 ns</td> <td>20.000 μs</td> <td>0</td> </tr> <tr> <td>D</td> <td>Pulse0</td> <td>8.333 ns</td> <td>20.000 μs</td> <td>0</td> </tr> <tr> <td>R</td> <td>Pulse0</td> <td>8.333 ns</td> <td>20.000 μs</td> <td>0</td> </tr> </tbody> </table>						Name	Source	Width	Delay	Atten	A	Pulse0	8.333 ns	20.000 μs	0	B	Pulse0	8.333 ns	20.000 μs	0	C	Pulse0	8.333 ns	20.000 μs	0	D	Pulse0	8.333 ns	20.000 μs	0	R	Pulse0	8.333 ns	20.000 μs	0
Name	Source	Width	Delay	Atten																															
A	Pulse0	8.333 ns	20.000 μs	0																															
B	Pulse0	8.333 ns	20.000 μs	0																															
C	Pulse0	8.333 ns	20.000 μs	0																															
D	Pulse0	8.333 ns	20.000 μs	0																															
R	Pulse0	8.333 ns	20.000 μs	0																															
Pulse Generators...		Pulse Trigger...		Apply	OK																														
				Cancel																															

Mixer/Converter Scalar Measurement

Comprehensive Mixer/Converter Characteristic measurement


Provide comprehensive measurement setting of mixer / Converter characteristics, support double-order primary vibration and external primary vibration source input; support multiple scanning types such as linear sweep, power sweep and segment sweep; simple setting can automatically complete the complex mixer RF, double LO, IF frequency doubling and frequency distribution; support the setting of source port power, local vibration port power, attenuation and power sweep characteristics.

Simple and efficient frequency conversion loss amplitude response characteristic test and analysis

Provide the most direct and accurate mixer / Converter frequency conversion loss amplitude response measurement function. Enhance power calibration by power meter to complete the RF and IF full band calibration.

Independent dual-power calibration method realizes the test and analysis of non-inserted frequency conversion device

Support dual independent source power and receiver calibration, provides the solution of non-insertion connection mode through port separation mode, instead of connector de-embedding, power meter de-embedding and other ways, to provide a more accurate calibration mode for non-insertion measured parts.

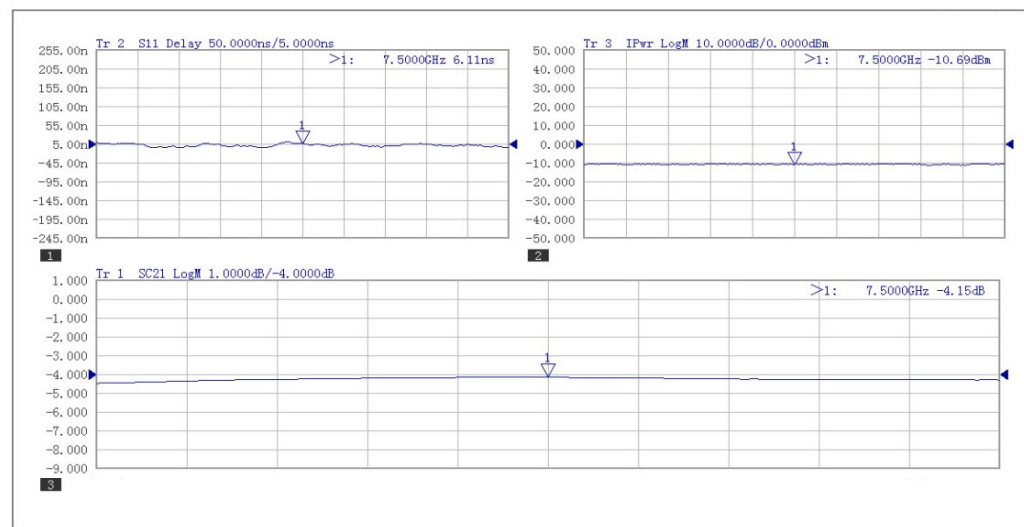

Mixer/Converter Vector Measurement


A single instrument simultaneously completes the amplitude response and the absolute phase timely delay response test analysis

Provide complete mixer / frequency converter amplitude response, absolute phase and absolute delay response measurement ability, a single connection can complete the mixer / frequency converter complex characteristic measurement, high amplitude and phase measurement accuracy.

Characterization of the mixer / Converter characteristics

The vector measurement analysis of mixer / Converter can complete the characterization of the mixer, which is used to determine the characteristics of the mixer and obtain the characteristics of the Converter.


The feature characterization function serves as an independent function, and the generated mixer characterization data files can be automatically called in the vector measurement analysis.

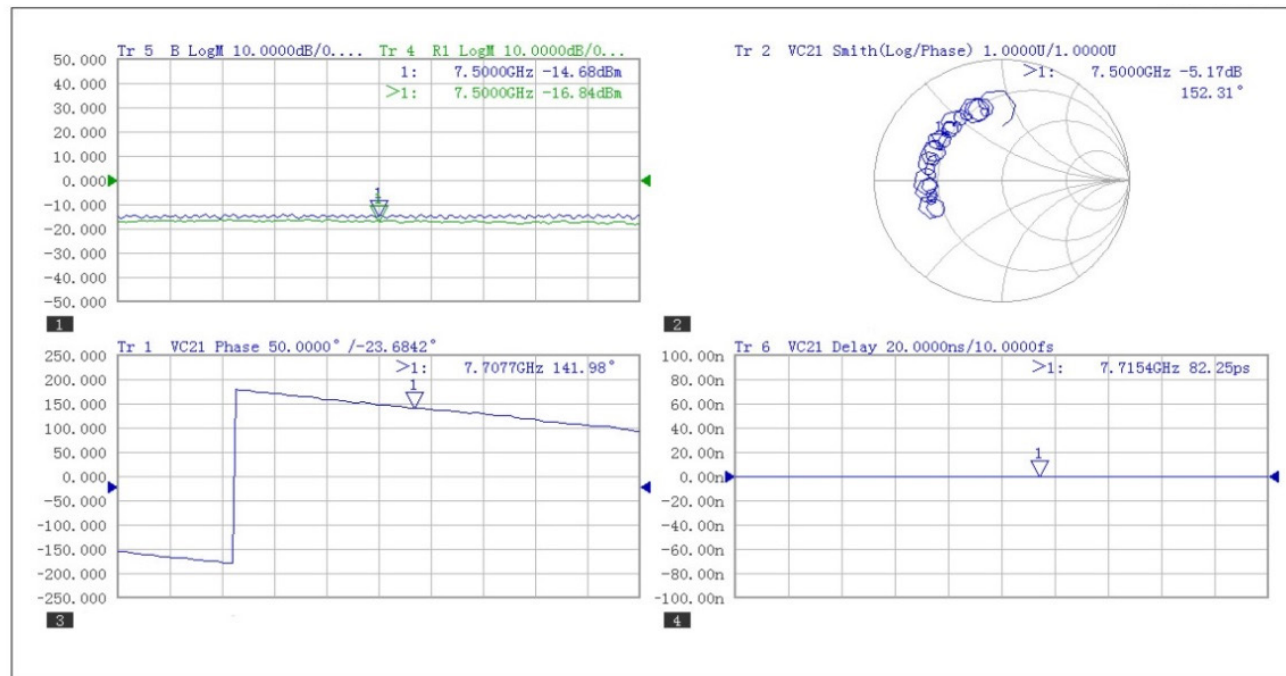

Gain Compression Measurement

Single connection, quickly complete the amplifier gain compression parameter test

The gain compression measurement function completes the measurement of the linear gain, compression point gain, input power, output power, and linear input matching in the active device through one connection and one calibration.

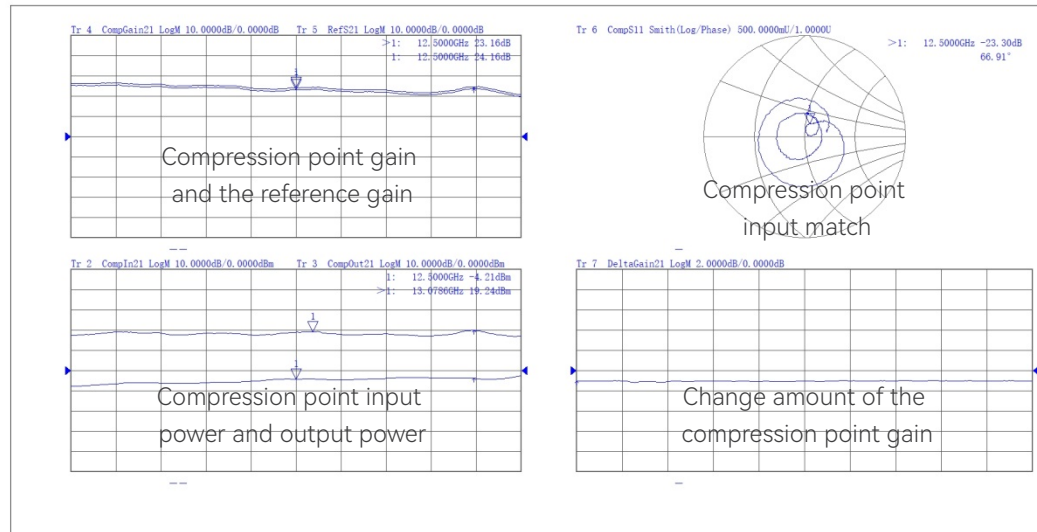

Power calibration, guide calibration to obtain high precision measurement


Power calibration and receiver calibration can obtain accurate compression point input power and output power values. The exact gain measurement and input / output matching values can be obtained.

Various scanning methods and compression methods should deal with different measurement scenarios

Intelligent scanning can quickly and accurately get compression points, provide the power scanning of each frequency point and the frequency scanning mode of each power point, obtain complete measurement data, provide from linear gain compression, from the maximum gain compression, from the fallback point compression, X / Y compression, saturated state compression, users can choose different compression methods according to the type of test and different measurement scenarios.

3D view drawing, visually show the characteristics of the tested parts

Provide 3D view function to better show the performance of the tested device under the excitation state; it can also show the frequency profile and power profile to visually show the characteristics of the measured device at each frequency point and each power point.

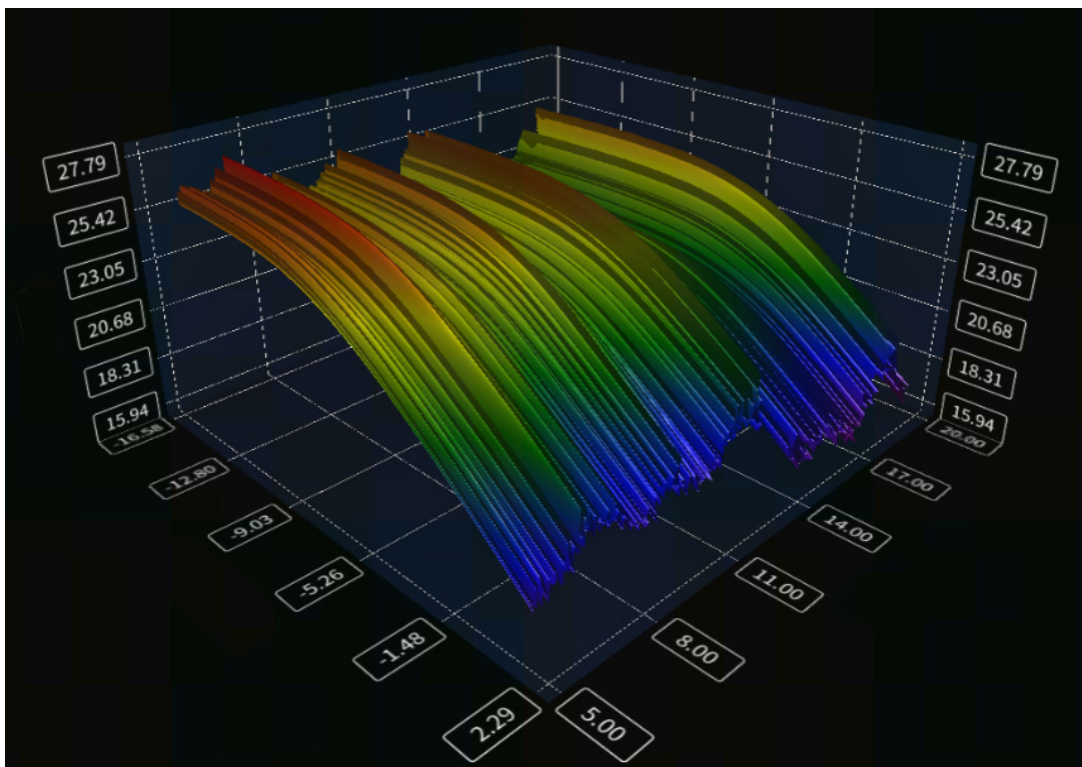

Three dimensional view



Power section, frequency section

Noise Figure Measurement

Fast, accurate, and large dynamic range

Primary connection can simultaneously test S parameters, noise coefficient, noise parameters, gain compression and frequency conversion gain. Based on the cold source noise coefficient test method, the accurate noise coefficient and noise parameter test can be conducted. By constructing the advanced noise correlation matrix model and combining with the precise S parameter calibration of the vector network analyzer, it is suitable for the accurate test of the measured parts with the lower noise coefficient. The measurement dynamic range can reach 55dB, which is suitable for testing of subjects with large gain.


Analysis of the noise coefficient test of non-standard interface devices such as microwave chip

Based on the patented noise embedding / deembedding technology, the noise coefficient test of non-standard interface devices is realized. In particular, it can solve the problem of microwave chip noise coefficient in the chip test, and eliminate the impact of the mismatch between the tested parts and the test equipment.

Test and analysis of the noise parameters

The noise coefficient and the noise parameters can be tested simultaneously, including the amplitude and phase of the minimum noise coefficient, the noise internal resistance and the optimal reflection coefficient.

The influence of noise parameters can be eliminated by the modification of noise power receiver.

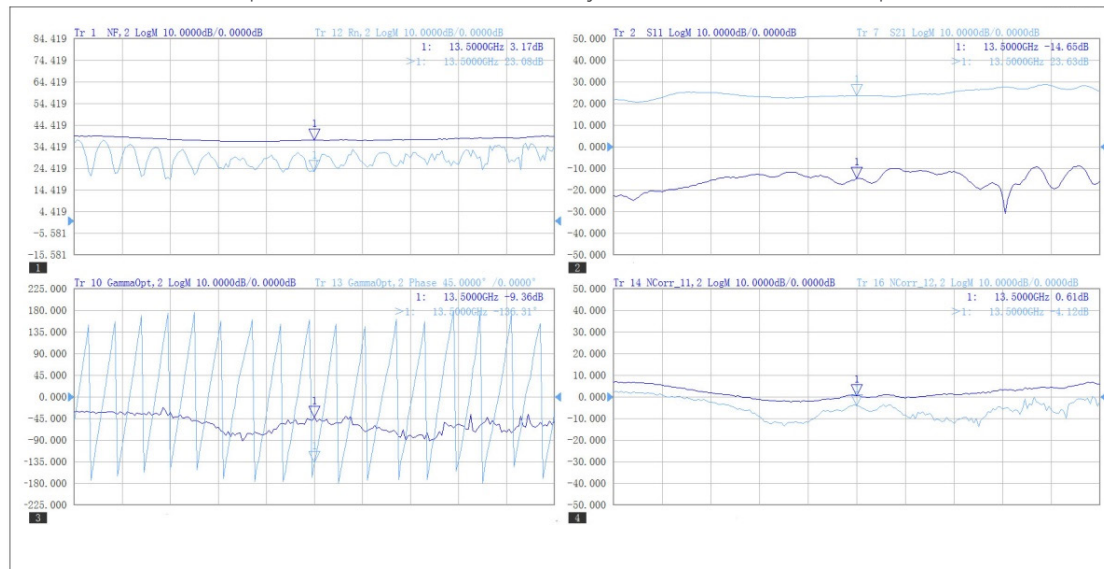

Spectrum Analysis Measurement

Rapid search of multiport stray spectra and harmonics



Each port of the vector network analyzer can complete the measurement of the input and output spectrum of the measured spectrum, and the spectrum measurement technology based on fast Fourier transform can quickly locate the state of the stray spectrum and harmonic of the measured spectrum at a small resolution bandwidth

A single connection of a single instrument completes the multi-parameter evaluation of the measured device

For the test of active devices, the spectrum measurement function can provide more measurement parameters, a single instrument can realize the conventional S parameter test, stray and harmonic positioning measurement; complete ratio and absolute measurement error correction technology can provide more accurate measurement results.

Efficient labeling and measurement function

The marking of spectrum measurement function can provide in-band power, power spectral density, occupied bandwidth, adjacent power ratio and other indicators, and one-click setting and real-time update.

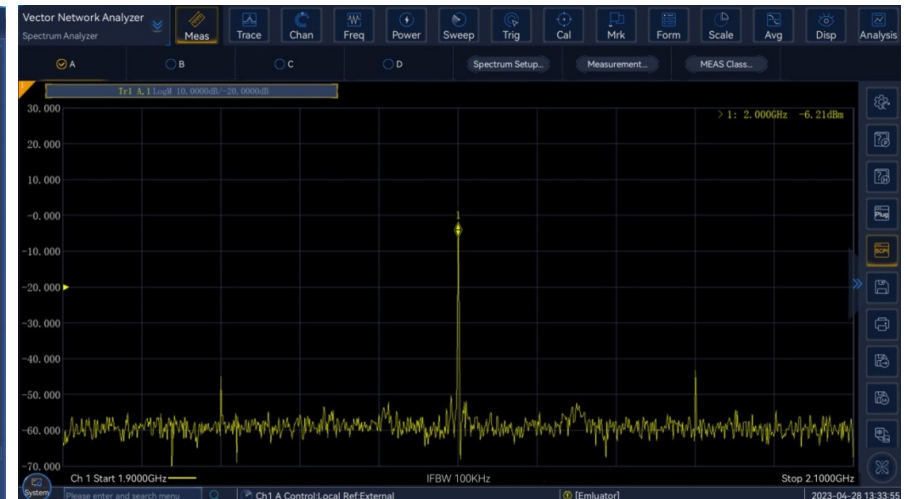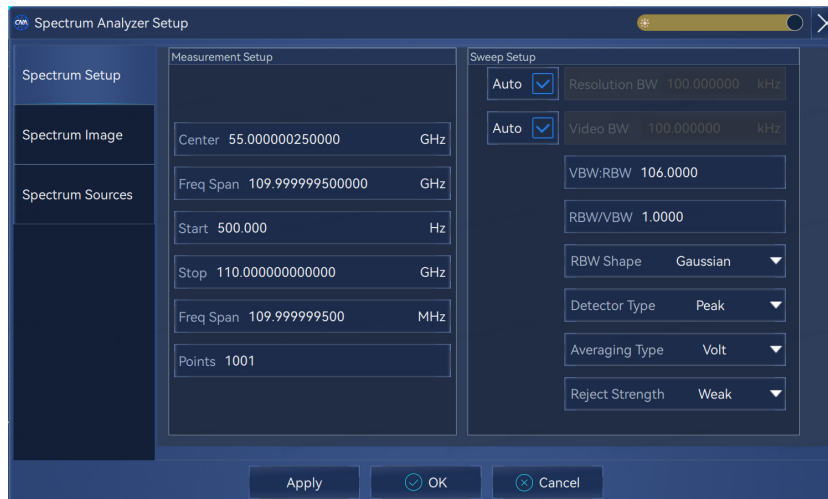

Analysis of the signal integrity measurements

Ultra-broadband coverage enables time-domain analysis with micron-scale resolution

Powerful signal integrity measurement and analysis ability, can provide micron level spatial resolution, for small size chip packaging test, to solve the problem of positioning discontinuity.


Test analysis of the signal integrity in a single view

A single view completes both time domain and frequency domain test analysis, helping the user to find the source of impedance discontinuity, reflection and crosstalk. It can accurately measure the impedance characteristics of transmission lines; convenient proximal and remote crosstalk tests to test the degree of interaction between multiple transmission lines.

Simulated eye diagram for rapid analysis of signal integrity

It has the function of virtual eye map generation and analysis based on network parameters. Depending on the different high-speed digital communication standards, high-efficiency Pass / Fail tests can be performed using pre-defined eye-map templates.

Jitter, noise and other interference can be applied to the simulated eye map, and the simulated eye map of different positions in the high-speed link can be simulated through the addition of correction algorithms such as pre-aggravation and equilibrium.

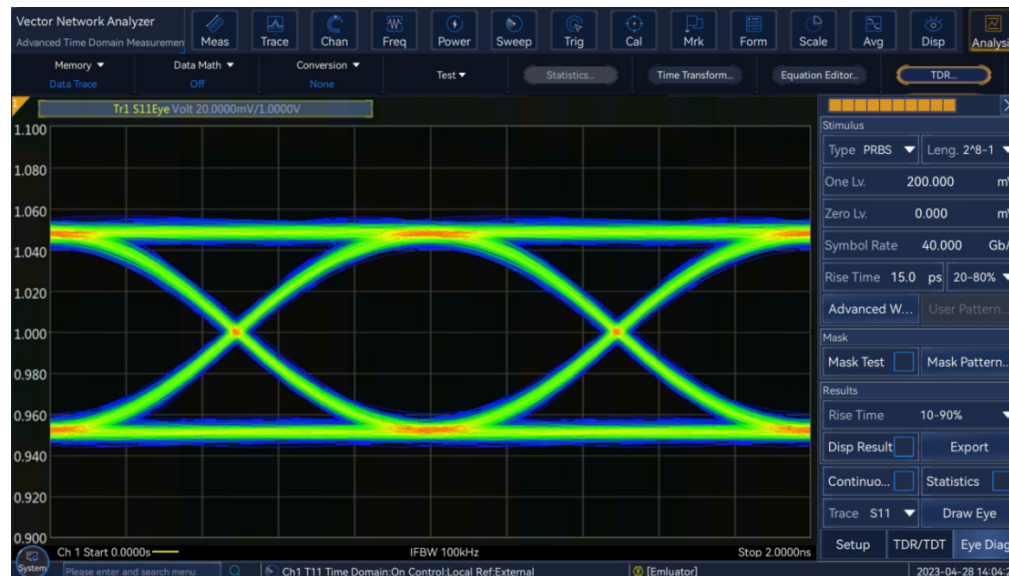

Analysis of the total harmonic distortion (THD) measurement

Test analysis of multiple harmonics of a wide-band coverage differential amplifier


Broadband test can be used for the measurement and analysis of input and output power, gain, harmonic total distortion and other parameters under true differential excitation, and simplify the harmonic performance test complexity of differential active devices with as amplifier.

Single calibration simultaneously completes the multi-channel error correction

A single calibration can simultaneously complete the multi-channel error correction of the standard S parameter and the total harmonic distortion, that is, the ratio measurement error, the absolute receiver measurement error, and the error correction of the port excitation power. The transmission and mismatch errors introduced by different mechanical attenuation files between the channels can also be compensated by a single calibration.

Convenient and efficient setting mode of measurement parameters


The editing of setting the measurement parameters can be completed by XML file. The parameters can be imported with one key, and the imported measurement parameters can be updated to the parameter selection interface in real time.

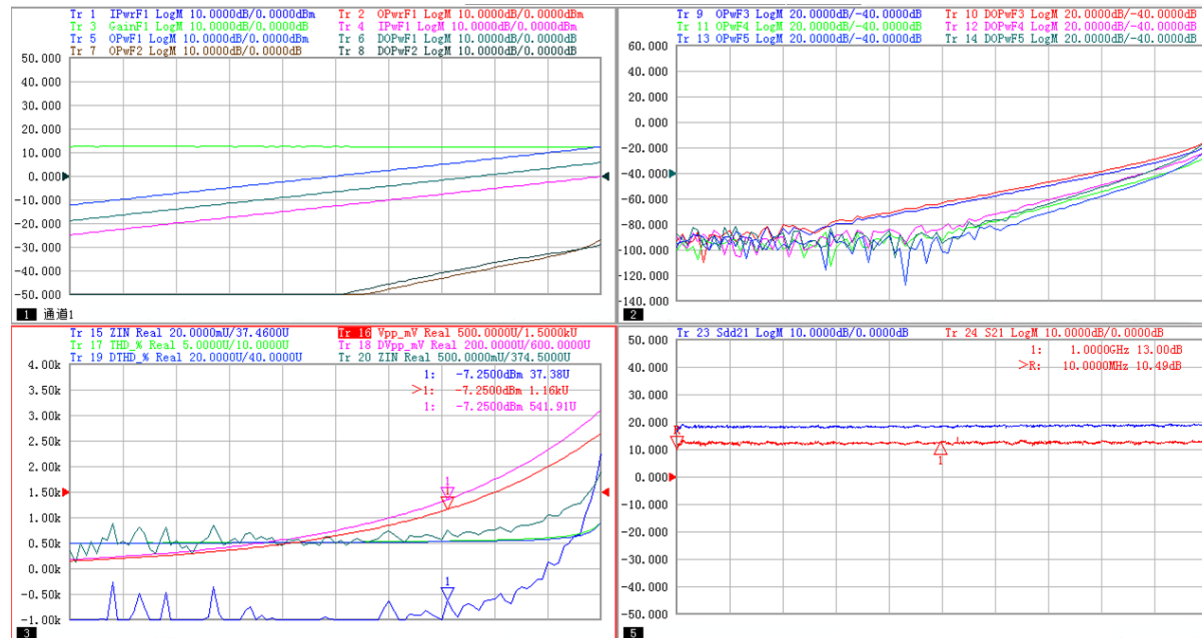

Automatic Fixture Removal


Solve the test problem of non-standard joint devices

For non-standard connector devices testing, such as packaging microwave devices, in-chip devices, such devices cannot be directly connected to the vector network analyzer. The fixture is usually used to connect the measured piece to a vector network analyzer, but the fixture also introduces measurement error. The automatic fixture removal function can extract, store the fixture parameters and embed the fixture, and finally obtain the real parameters of the measured parts.

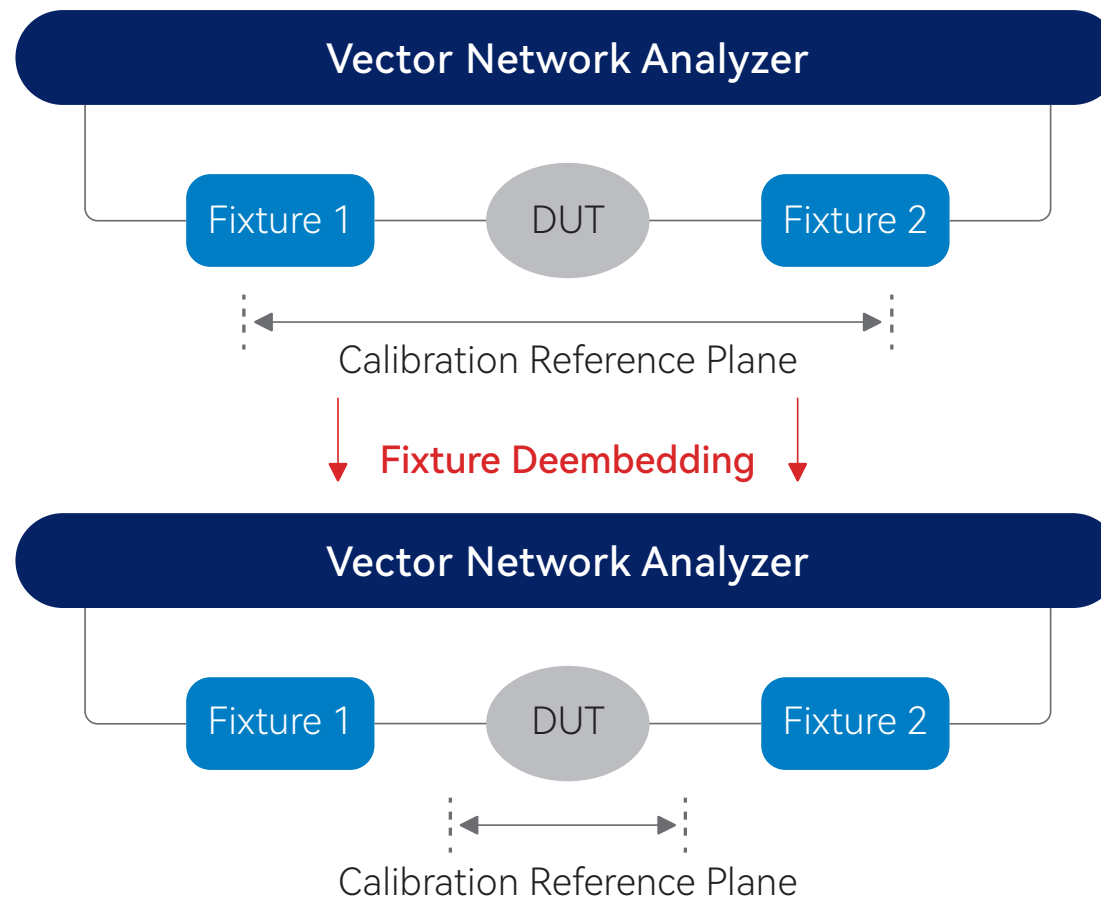


Simple operation and high error correction accuracy


Automatic fixture removal function has the advantages of easy operation and high precision. This feature does not require custom calibration, eliminates proximal and distal crosstalk of the differential fixture, and is suitable for test scenarios with open circuit at one end of the fixture.

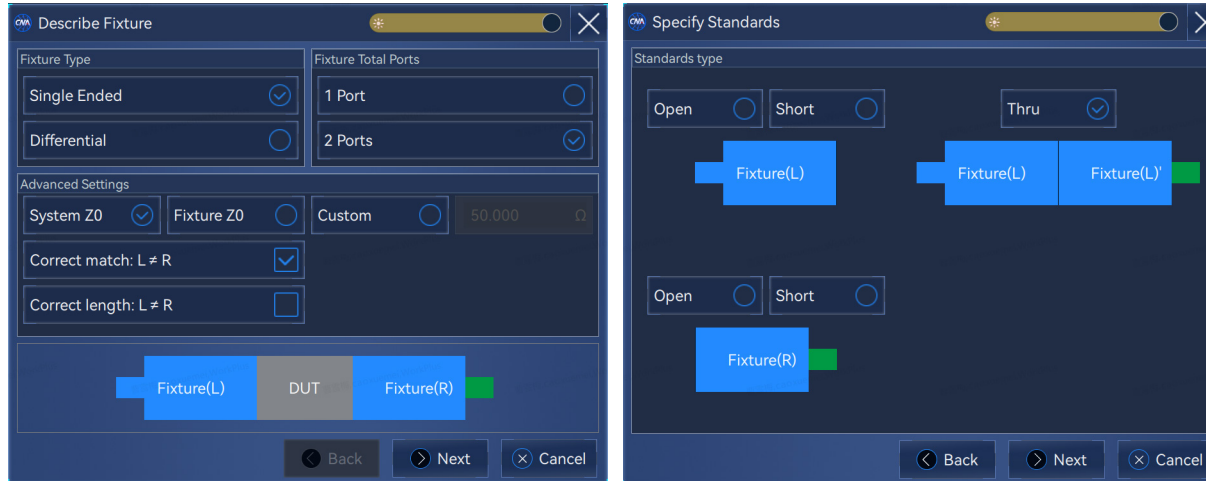

Using the automatic fixture removal function, the measured parts as a whole, balance parameter extraction and four-port embedding. It can effectively remove the transmission parameters, proximal crosstalk, and remote crosstalk.

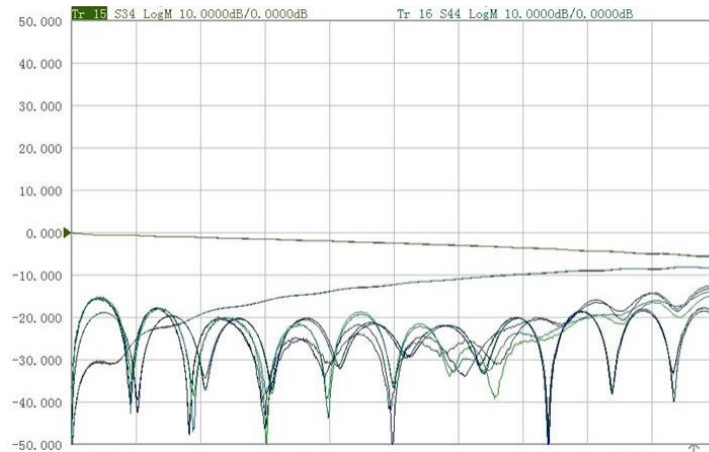

Before the fixture is embedded

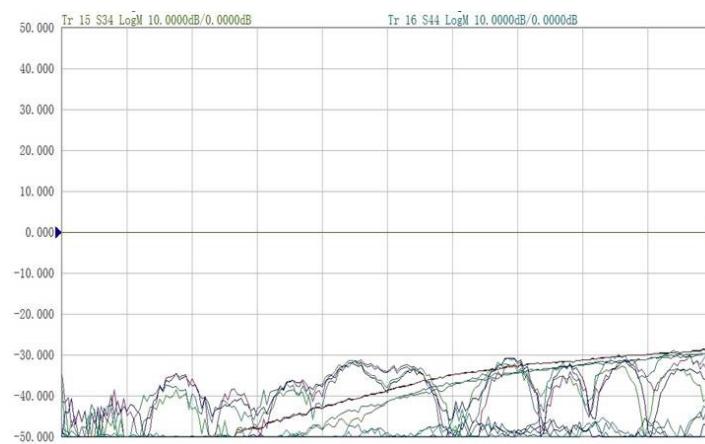

After the fixture is embedded

The Ultimate User Experience

The interface is simple and intuitive, easy to operate, and improve the test efficiency

Personalize the display area.
Hundreds of measurement windows can be displayed

15.6-inch HD screen
2K resolution

search function: quick
location of strange functions
Realize convenient interaction

Toolbar has many common functions,
convenient and quick operation

The SPC1 command is recording
Dedicated to automatic testing
and development, save 30%
workload

Two / 4 ports are optional
Flexible configuration
test device

Simple interface
stick out a mile
The USB3.0 interface
burst transmission

Rich in peripheral interfaces, flexible and practical



- 01 10 MHz external reference input / output interface
- 02 110V / 220V adaptive power supply input
- 03 Detachable CPU module, configured with hard disk, LAN, DP, USB, and GPIB interfaces
- 04 excitation output and local vibration output provide flexible measurement configuration
- 05 External and intermediate frequency input interface, pulse input and output interface
- 06 Bias Tees configuration input interface
- 07 Automatic test interface, trigger input / output interface, noise source power interface

Technical Specifications

S3674B/C/D/E Technical Specifications

Frequency Characteristic			
Frequency Range		10MHz to 9 GHz /14 GHz /20 GHz /26.5 GHz	
Frequency Resolution		0.1Hz	
Frequency Accuracy		±1×10 ⁻⁷ (23°C±3°C)	
Port Harmonic Suppression			
Port 1,3		-48dBc (0.01 ~ 4GHz)	-62dBc (0.01 ~ 4GHz)
Harmonic Suppression		-57dBc (4 ~ 14GHz)	-68dBc (4 ~ 14GHz)
		-57dBc (14 ~ 26.5GHz)	-70dBc (14 ~ 26.5GHz)
Port 2,4		-13dBc (0.01 ~ 4GHz)	-24dBc (0.01 ~ 4GHz)
Harmonic Suppression		-18dBc (4 ~ 14GHz)	-30dBc (4 ~ 14GHz)
		-18dBc (14 ~ 26.5GHz)	-36dBc (14 ~ 26.5GHz)
Port Power Characteristics			
Power Sweep Range		33dB (10 ~ 50MHz)	36dB (10 ~ 50MHz)
		35dB (0.05 ~ 4GHz)	39dB (0.05 ~ 4GHz)
		38dB (4 ~ 16GHz)	41dB (4 ~ 16GHz)
		35dB (16 ~ 20GHz)	40dB (16 ~ 20GHz)
		32dB (20 ~ 24GHz)	39dB (20 ~ 24GHz)
		27dB (24 ~ 26.5GHz)	38dB (24 ~ 26.5GHz)
Max. Output Power (Standard Configuration, Option 400)	Port 1,3	+8dBm (10 ~ 50MHz) (Filter mode)	+9dBm (10 ~ 50MHz) (Filter mode)
		+10dBm (0.05 ~ 4GHz) (Filter mode)	+13dBm (0.05 ~ 4GHz) (Filter mode)

Max. Output Power (Standard Configuration, Option 400)	Port 1,3	+13dBm (10 ~ 50MHz) (High-Power mode) +10dBm (0.05 ~ 4GHz) (High-Power mode) +13dBm (4 ~ 20GHz) +12dBm (20 ~ 24GHz) +8dBm (24 ~ 26.5GHz)	+16dBm (10 ~ 50MHz) (High-Power mode) +15dBm (0.05 ~ 4GHz) (High-Power mode) +16dBm (4 ~ 20GHz) +15dBm (20 ~ 24GHz) +14dBm (24 ~ 26.5GHz)
	Port 2,4	+13dBm (0.01 ~ 16GHz) +10dBm (16 ~ 20GHz) +10dBm (20 ~ 24GHz) +8dBm (24 ~ 26.5GHz)	+17dBm (0.01 ~ 16GHz) +17dBm (16 ~ 20GHz) +15dBm (20 ~ 24GHz) +14dBm (24 ~ 26.5GHz)
Max. Output Power (Full Option)	Port 1,3	+6dBm (10 ~ 50MHz) (Filter mode) +8dBm (0.05 ~ 4GHz) (Filter mode) +12dBm (10 ~ 50MHz) (High-Power mode) +8dBm (0.05 ~ 4GHz) (High-Power mode) +8dBm (4 ~ 20GHz) +5dBm (20 ~ 24GHz) -1dBm (24 ~ 26.5GHz)	+9dBm (10 ~ 50MHz) (Filter mode) +10dBm (0.05 ~ 4GHz) (Filter mode) +12dBm (10 ~ 50MHz) (High-Power mode) +10dBm (0.05 ~ 4GHz) (High-Power mode) +10dBm (4 ~ 20GHz) +10dBm (20 ~ 24GHz) +5dBm (24 ~ 26.5GHz)
	Port 2,4	+8dBm (0.01 ~ 16GHz) +8dBm (16 ~ 20GHz) +5dBm (20 ~ 24GHz) -1dBm (24 ~ 26.5GHz)	+12dBm (0.01 ~ 16GHz) +12dBm (16 ~ 20GHz) +8dBm (20 ~ 24GHz) +4dBm (24 ~ 26.5GHz)
Pulse Characteristic			
Pulse Width Setting Range		33ns ~ 70s	20ns ~ 70s
Pulse ON/OFF Ratio		64dB (0.01 ~ 4GHz) 80dB (4 ~ 26.5GHz)	

Network Parameter Characteristic

System Dynamic Range (Standard, Option 400)	96dB (10 ~ 50MHz)	108dB (10 ~ 50MHz)
	110dB (50 ~ 100MHz)	124dB (50 ~ 100MHz)
	115dB (100 ~ 500MHz)	129dB (100 ~ 500MHz)
	132dB (0.5 ~ 2GHz)	138dB (0.5 ~ 2GHz)
	129dB (2 ~ 4GHz)	141dB (2 ~ 4GHz)
	133dB (4 ~ 9GHz)	139dB (4 ~ 9GHz)
	134dB (9 ~ 10GHz)	140dB (9 ~ 10GHz)
	133dB (10 ~ 14GHz)	140dB (10 ~ 14GHz)
	132dB (14 ~ 16GHz)	139dB (14 ~ 16GHz)
	130dB (16 ~ 20GHz)	133dB (16 ~ 20GHz)
	128dB (20 ~ 24GHz)	132dB (20 ~ 24GHz)
	122dB (24 ~ 26.5GHz)	127dB (24 ~ 26.5GHz)
System dynamic range (Full Option)	96dB (10 ~ 50MHz)	105dB (10 ~ 50MHz)
	110dB (50 ~ 500MHz)	120dB (50 ~ 500MHz)
	128dB (0.5 ~ 2GHz)	132dB (0.5 ~ 2GHz)
	126dB (2 ~ 4GHz)	134dB (2 ~ 4GHz)
	130dB (4 ~ 10GHz)	133dB (4 ~ 10GHz)
	128dB (10 ~ 14GHz)	136dB (10 ~ 14GHz)
	126dB (14 ~ 16GHz)	135dB (14 ~ 16GHz)
	124dB (16 ~ 20GHz)	130dB (16 ~ 20GHz)
	122dB (20 ~ 24GHz)	128dB (20 ~ 24GHz)
	114dB (24 ~ 26.5GHz)	122dB (24 ~ 26.5GHz)

Effective Directivity	48dB (0.01 ~ 2GHz) 44dB (2 ~ 26.5GHz)	65dB (0.01 ~ 2GHz) 52dB (2 ~ 26.5GHz)
Effective Source Match	40dB (0.01 ~ 2GHz) 31dB (2 ~ 26.5GHz)	46dB (0.01 ~ 2GHz) 36dB (2 ~ 26.5GHz)
Effective Load Match	47dB (0.01 ~ 2GHz) 44dB (2 ~ 26.5GHz)	61dB (0.01 ~ 2GHz) 56dB (2 ~ 26.5GHz)
Reflection Tracking	±0.0150dB (0.01 ~ 2GHz) ±0.0161dB (2 ~ 26.5GHz)	±0.0010dB (0.01 ~ 2GHz) ±0.0014dB (2 ~ 26.5GHz)
Transmission Tracking	±0.044dB (10 ~ 50MHz) ±0.055dB (0.05 ~ 2GHz) ±0.120dB (2 ~ 9GHz) ±0.110dB (9 ~ 14GHz) ±0.120dB (14 ~ 26.5GHz)	±0.001dB (10 ~ 50MHz) ±0.002dB (0.05 ~ 2GHz) ±0.004dB (2 ~ 9GHz) ±0.005dB (9 ~ 14GHz) ±0.008dB (14 ~ 26.5GHz)
Others		
Amplitude Trace Noise dB rms (1 kHz IF bandwidth)	0.0070 (10 ~ 50MHz) 0.0020 (50 ~ 100MHz) 0.0020 (100 ~ 500MHz) 0.0020 (0.5 ~ 1GHz) 0.0020 (1 ~ 14GHz) 0.0020 (14 ~ 22.5GHz) 0.0030 (22.5 ~ 24GHz) 0.0050 (24 ~ 26.5GHz)	0.0026 (10 ~ 50MHz) 0.0011 (50 ~ 100MHz) 0.0005 (100 ~ 500MHz) 0.0005 (0.5 ~ 1GHz) 0.0005 (1 ~ 14GHz) 0.0005 (14 ~ 22.5GHz) 0.0006 (22.5 ~ 24GHz) 0.0006 (24 ~ 26.5GHz)
Phase Trace Noise Deg rms (1 kHz IF bandwidth)	0.051 (10 ~ 50MHz) 0.051 (50 ~ 100MHz) 0.015 (100 ~ 500MHz) 0.015 (0.5 ~ 1GHz)	0.014 (10 ~ 50MHz) 0.001 (50 ~ 100MHz) 0.003 (100 ~ 500MHz) 0.003 (0.5 ~ 1GHz)

Others		
Phase Trace Noise Deg rms (1 kHz IF bandwidth)	0.015 (1 ~ 14GHz)	0.003 (1 ~ 14GHz)
	0.042 (14 ~ 22.5GHz)	0.004 (14 ~ 22.5GHz)
	0.054 (22.5 ~ 24GHz)	0.003 (22.5 ~ 24GHz)
	0.054 (24 ~ 26.5GHz)	0.004 (24 ~ 26.5GHz)
IF Bandwidth	1Hz ~ 30MHz	
Amplitude Display resolution	0.001dB/div	
Phase Display Resolution	0.001°/div	
General Characteristic		
Port Connectors	3.5mm (head), system impedance 50 ohms	
Number of Measured Ports	S3674B / C / D / E standard: 2-port; 3674B / C / D / E-400 option: 4- port	
Peripheral Interface	GPIB interface, USB interface, DP interface, LAN interface	
Display	A 15.6-inch high-resolution touch display	
Dimensions	Overall dimensions (width and depth, including handles, feet and pads):	
	2- port: 475mm *279mm* 560mm 4-port: 475mm *279mm* 660mm	
Max. Power Consumption	500W	
Power Supply	50Hz single-phase 220V or 50Hz / 60Hz single-phase 110V AC	
Max. Weight	50kg	

S3674F/G/H Technical Specification

Frequency Characteristic		
Frequency Range	10MHz ~ 32/44/50GHz	
Frequency Resolution	0.1Hz	
Frequency Accuracy	±1×10 ⁻⁷ (23°C±3°C)	
Port Harmonic Suppression		
Port 1,3 Harmonic Suppression	-48dBc (0.01 ~ 4GHz)	-68dBc (0.01 ~ 4GHz)
	-57dBc (4 ~ 14GHz)	-70dBc (4 ~ 14GHz)
	-57dBc (14 ~ 50GHz)	-70dBc (14 ~ 50GHz)
Port 2,4 Harmonic Suppression	-13dBc (0.01 ~ 4GHz)	-21dBc (0.01 ~ 4GHz)
	-18dBc (4 ~ 14GHz)	-31dBc (4 ~ 14GHz)
	-57dBc (14 ~ 50GHz)	-70dBc (14 ~ 50GHz)
Port Power Characteristics		
Power scan range	37dB (10 ~ 50MHz)	42dB (10 ~ 50MHz)
	38dB (0.05 ~ 2GHz)	44dB (0.05 ~ 2GHz)
	35dB (2 ~ 4GHz)	41dB (2 ~ 4GHz)
	38dB (4 ~ 26.5GHz)	41dB (4 ~ 26.5GHz)
	37dB (26.5 ~ 30GHz)	42dB (26.5 ~ 30GHz)
	36dB (30 ~ 32GHz)	40dB (30 ~ 32GHz)
	37dB (32 ~ 35GHz)	43dB (32 ~ 35GHz)
	34dB (35 ~ 44GHz)	39dB (35 ~ 44GHz)
	30dB (44 ~ 47GHz)	38dB (44 ~ 47GHz)
	20dB (47 ~ 50GHz)	36dB (47 ~ 50GHz)

Max. Output Power (Standard Configuration, Option 400)	Port 1,3	+4dBm (10 ~ 50MHz) (Filter mode) +8dBm (0.05 ~ 2GHz) (Filter mode) +8dBm (2 ~ 4GHz) (Filter mode) +12dBm (10 ~ 50MHz) (High-Power mode) +13dBm (0.05 ~ 2GHz) (High-Power mode) +10dBm (2 ~ 4GHz) (High-Power mode) +13dBm (4 ~ 26.5GHz) +12dBm (26.5 ~ 30GHz) +11dBm (30 ~ 32GHz) +12dBm (32 ~ 35GHz) +9dBm (35 ~ 44GHz) +9dBm (44 ~ 47GHz) +5dBm (47 ~ 50GHz)	+9dBm (10 ~ 50MHz) (Filter mode) +13dBm (0.05 ~ 2GHz) (Filter mode) +13dBm (2 ~ 4GHz) (Filter mode) +14dBm (10 ~ 50MHz) (High-Power mode) +16dBm (0.05 ~ 2GHz) (High-Power mode) +13dBm (2 ~ 4GHz) (High-Power mode) +14dBm (4 ~ 26.5GHz) +16dBm (26.5 ~ 30GHz) +15dBm (30 ~ 32GHz) +16dBm (32 ~ 35GHz) +15dBm (35 ~ 44GHz) +13dBm (44 ~ 47GHz) +10dBm (47 ~ 50GHz)
	Port 2,4	+12dBm (10 ~ 50MHz) +13dBm (0.05 ~ 26.5GHz) +12dBm (26.5 ~ 30GHz) +11dBm (30 ~ 32GHz) +12dBm (32 ~ 35GHz) +9dBm (35 ~ 44GHz) +9dBm (44 ~ 47GHz) +5dBm (47 ~ 50GHz)	+17dBm (10 ~ 50MHz) +16dBm (0.05 ~ 26.5GHz) +16dBm (26.5 ~ 30GHz) +16dBm (30 ~ 32GHz) +17dBm (32 ~ 35GHz) +15dBm (35 ~ 44GHz) +13dBm (44 ~ 47GHz) +11dBm (47 ~ 50GHz)

Max. Output Power (Full Option)	Port 1,3	+2dBm (10 ~ 50MHz) (Filter mode) +4dBm (0.05 ~ 2GHz) (Filter mode) +5dBm (2 ~ 4GHz) (Filter mode) +4dBm (10 ~ 50MHz) (High-Power mode) +4dBm (0.05 ~ 2GHz) (High-Power mode) +5dBm (2 ~ 4GHz) (High-Power mode) +6dBm (4 ~ 26.5GHz) +5dBm (26.5 ~ 30GHz) +2dBm (30 ~ 32GHz) +5dBm (32 ~ 35GHz) +0dBm (35 ~ 44GHz) -3dBm (44 ~ 47GHz) -5dBm (47 ~ 50GHz)	+7dBm (10 ~ 50MHz) (Filter mode) +9dBm (0.05 ~ 2GHz) (Filter mode) +10dBm (2 ~ 4GHz) (Filter mode) +6dBm (10 ~ 50MHz) (High-Power mode) +7dBm (0.05 ~ 2GHz) (High-Power mode) +8dBm (2 ~ 4GHz) (High-Power mode) +7dBm (4 ~ 26.5GHz) +9dBm (26.5 ~ 30GHz) +6dBm (30 ~ 32GHz) +9dBm (32 ~ 35GHz) +4dBm (35 ~ 44GHz) +1dBm (44 ~ 47GHz) 0dBm (47 ~ 50GHz)
	Port 2,4	+5dBm (10 ~ 50MHz) +5dBm (0.05 ~ 26.5GHz) +5dBm (26.5 ~ 30GHz) +2dBm (30 ~ 32GHz) +5dBm (32 ~ 35GHz) 0dBm (35 ~ 44GHz) -3dBm (44 ~ 47GHz) -5dBm (47 ~ 50GHz)	+10dBm (10 ~ 50MHz) +8dBm (0.05 ~ 26.5GHz) +9dBm (26.5 ~ 30GHz) +7dBm (30 ~ 32GHz) +10dBm (32 ~ 35GHz) +6dBm (35 ~ 44GHz) +1dBm (44 ~ 47GHz) 0dBm (47 ~ 50GHz)
Pulse Characteristic			
Pulse Width Setting Range		33ns ~ 60s	20ns ~ 70s
Pulse ON/OFF Ratio		64dB (0.01 ~ 4GHz) 80dB (4 ~ 50GHz)	

Network Parameter Characteristic

System Dynamic Range (Standard, Option 400)	96dB (10 ~ 50MHz)	104dB (10 ~ 50MHz)
	106dB (50 ~ 500MHz)	122dB (50 ~ 500MHz)
	132dB (0.5 ~ 1GHz)	137dB (0.5 ~ 1GHz)
	132dB (1 ~ 2GHz)	138dB (1 ~ 2GHz)
	129dB (2 ~ 4GHz)	140dB (2 ~ 4GHz)
	131dB (4 ~ 10GHz)	139dB (4 ~ 10GHz)
	128dB (10 ~ 16GHz)	139dB (10 ~ 16GHz)
	129dB (16 ~ 20GHz)	138dB (16 ~ 20GHz)
	130dB (20 ~ 26.5GHz)	138dB (20 ~ 26.5GHz)
	125dB (26.5 ~ 30GHz)	137dB (26.5 ~ 30GHz)
	126dB (30 ~ 32GHz)	135dB (30 ~ 32GHz)
	127dB (32 ~ 35GHz)	133dB (32 ~ 35GHz)
	122dB (35 ~ 47GHz)	130dB (35 ~ 47GHz)
	102dB (47 ~ 50GHz)	111dB (47 ~ 50GHz)
System dynamic range (Full Option)	89dB (10 ~ 50MHz)	97dB (10 ~ 50MHz)
	98dB (50 ~ 500MHz)	108dB (50 ~ 500MHz)
	123dB (0.5 ~ 1GHz)	125dB (0.5 ~ 1GHz)
	125dB (1 ~ 2GHz)	130dB (1 ~ 2GHz)
	122dB (2 ~ 4GHz)	130dB (2 ~ 4GHz)
	124dB (4 ~ 10GHz)	132dB (4 ~ 10GHz)
	120dB (10 ~ 16GHz)	129dB (10 ~ 16GHz)
	121dB (16 ~ 20GHz)	128dB (16 ~ 20GHz)
	122dB (20 ~ 26.5GHz)	127dB (20 ~ 26.5GHz)

System dynamic range (Full Option)	117dB (26.5 ~ 30GHz) 118dB (30 ~ 32GHz) 119dB (32 ~ 35GHz) 114dB (35 ~ 47GHz) 100dB (47 ~ 50GHz)	125dB (26.5 ~ 30GHz) 122dB (30 ~ 32GHz) 124dB (32 ~ 35GHz) 119dB (35 ~ 47GHz) 104dB (47 ~ 50GHz)
Effective Directivity	41dB (0.01 ~ 2GHz) 38dB (2 ~ 20GHz) 36dB (20 ~ 50GHz)	59dB (0.01 ~ 2GHz) 54dB (2 ~ 20GHz) 47dB (20 ~ 50GHz)
Effective Source Match	31dB (0.01 ~ 2GHz) 30dB (2 ~ 20GHz) 23dB (20 ~ 50GHz)	45dB (0.01 ~ 2GHz) 36dB (2 ~ 20GHz) 31dB (20 ~ 50GHz)
Effective Load Match	42dB (0.01 ~ 2GHz) 37dB (2 ~ 20GHz) 35dB (20 ~ 50GHz)	58dB (0.01 ~ 2GHz) 55dB (2 ~ 20GHz) 51dB (20 ~ 50GHz)
Reflection Tracking	± 0.0150 dB (0.01 ~ 2GHz) ± 0.0290 dB (2 ~ 20GHz) ± 0.0300 dB (20 ~ 40GHz) ± 0.0400 dB (40 ~ 50GHz)	± 0.0046 dB (0.01 ~ 2GHz) ± 0.0022 dB (2 ~ 20GHz) ± 0.0020 dB (20 ~ 40GHz) ± 0.0065 dB (40 ~ 50GHz)
Transmission Tracking	± 0.051 dB (10 ~ 50MHz) ± 0.030 dB (0.05 ~ 2GHz) ± 0.095 dB (2 ~ 10GHz) ± 0.120 dB (10 ~ 20GHz) ± 0.200 dB (20 ~ 40GHz) ± 0.200 dB (40 ~ 50GHz)	± 0.002 dB (10 ~ 50MHz) ± 0.004 dB (0.05 ~ 2GHz) ± 0.002 dB (2 ~ 10GHz) ± 0.002 dB (10 ~ 20GHz) ± 0.005 dB (20 ~ 40GHz) ± 0.002 dB (40 ~ 50GHz)

Others		
Amplitude Trace Noise dB rms (1 kHz IF bandwidth)	0.2000 (10 ~ 50MHz)	0.0055 (10 ~ 50MHz)
	0.0200 (50 ~ 500MHz)	0.0018 (50 ~ 500MHz)
	0.0030 (0.5 ~ 1GHz)	0.0016 (0.5 ~ 1GHz)
	0.0020 (1 ~ 26.5GHz)	0.0004 (1 ~ 26.5GHz)
	0.0030 (26.5 ~ 44GHz)	0.0005 (26.5 ~ 44GHz)
	0.0040 (44 ~ 50GHz)	0.0023 (44 ~ 50GHz)
Phase Trace Noise Deg rms (1 kHz IF bandwidth)	1.000 (10 ~ 50MHz)	0.026 (10 ~ 50MHz)
	0.500 (50 ~ 500MHz)	0.003 (50 ~ 500MHz)
	0.020 (0.5 ~ 1GHz)	0.004 (0.5 ~ 1GHz)
	0.020 (1 ~ 26.5GHz)	0.005 (1 ~ 26.5GHz)
	0.030 (26.5 ~ 50GHz)	0.016 (26.5 ~ 50GHz)
IF Bandwidth	1Hz ~ 30MHz	
Amplitude Display resolution	0.001dB/div	
Phase Display Resolution	0.001°/div	
General Characteristic		
Port Connectors	2.4mm (head), system impedance 50 ohms	
Number of Measured Ports	S3674F / G / H standard standard: 2-port; S3674F / G / H-400 option: 4-port	
Peripheral Interface	GPIB interface, USB interface, DP interface, LAN interface	
Display	A 15.6-inch high-resolution touch display	
Dimensions	Overall dimensions (width and depth, including handles, feet and pads):	
	2-port: 475mm *279mm *560mm 4-port: 475mm *279mm *660mm	
Max. Power Consumption	500W	
Power Supply	50Hz single-phase 220V or 50Hz / 60Hz single-phase 110V AC	
Max. Weight	50kg	

S3674K/L Technical Specification

Frequency Characteristic		
Frequency Range	10MHz ~ 53/67GHz	
Frequency Resolution	0.1Hz	
Frequency Accuracy	±1×10 ⁻⁷ (23°C±3°C)	
Port Harmonic Suppression		
Port 1,3 Harmonic Suppression	-48dBc (0.01 ~ 4GHz)	-57dBc (0.01 ~ 4GHz)
	-57dBc (4 ~ 14GHz)	-70dBc (4 ~ 14GHz)
	-57dBc (14 ~ 67GHz)	-71dBc (14 ~ 67GHz)
Port 2,4 Harmonic Suppression	-13dBc (0.01 ~ 4GHz)	-25dBc (0.01 ~ 4GHz)
	-18dBc (4 ~ 14GHz)	-32dBc (4 ~ 14GHz)
	-57dBc (14 ~ 67GHz)	-72dBc (14 ~ 67GHz)
Port Power Characteristics		
Power scan range	35dB (10 ~ 50MHz)	41dB (10 ~ 50MHz)
	38dB (0.05 ~ 2GHz)	44dB (0.05 ~ 2GHz)
	35dB (2 ~ 4GHz)	40dB (2 ~ 4GHz)
	38dB (4 ~ 10GHz)	42dB (4 ~ 10GHz)
	36dB (10 ~ 14GHz)	43dB (10 ~ 14GHz)
	37dB (14 ~ 16GHz)	42dB (14 ~ 16GHz)
	35dB (16 ~ 19GHz)	40dB (16 ~ 19GHz)
	34dB (19 ~ 26.5GHz)	37dB (19 ~ 26.5GHz)
	33dB (26.5 ~ 30GHz)	37dB (26.5 ~ 30GHz)
	32dB (30 ~ 32GHz)	36dB (30 ~ 32GHz)
	32dB (32 ~ 35GHz)	39dB (32 ~ 35GHz)

Power scan range		30dB (35 ~ 40GHz) 35dB (40 ~ 67GHz)	36dB (35 ~ 40GHz) 40dB (40 ~ 67GHz)
Max. Output Power (Standard Configuration, Option 400)	Port 1,3	+4dBm (10 ~ 50MHz) (Filter mode) +8dBm (0.05 ~ 2GHz) (Filter mode) +10dBm (10 ~ 50MHz) (High-Power mode) +13dBm (0.05 ~ 2GHz) (High-Power mode) +10dBm (2 ~ 4GHz) +13dBm (4 ~ 10GHz) +11dBm (10 ~ 14GHz) +12dBm (14 ~ 16GHz) +10dBm (16 ~ 19GHz) +11dBm (19 ~ 26.5GHz) +10dBm (26.5 ~ 30GHz) +7dBm (30 ~ 32GHz) +9dBm (32 ~ 35GHz) +5dBm (35 ~ 40GHz) +10dBm (40 ~ 67GHz)	+8dBm (10 ~ 50MHz) (Filter mode) +12dBm (0.05 ~ 2GHz) (Filter mode) +16dBm (10 ~ 50MHz) (High-Power mode) +16dBm (0.05 ~ 2GHz) (High-Power mode) +12dBm (2 ~ 4GHz) +15dBm (4 ~ 10GHz) +14dBm (10 ~ 14GHz) +16dBm (14 ~ 16GHz) +16dBm (16 ~ 19GHz) +14dBm (19 ~ 26.5GHz) +13dBm (26.5 ~ 30GHz) +10dBm (30 ~ 32GHz) +12dBm (32 ~ 35GHz) +11dBm (35 ~ 40GHz) +16dBm (40 ~ 67GHz)
	Port 2,4	+12dBm (10 ~ 50MHz) +13dBm (0.05 ~ 10GHz) +11dBm (10 ~ 14GHz) +12dBm (14 ~ 16GHz) +10dBm (16 ~ 19GHz) +11dBm (19 ~ 26.5GHz) +10dBm (26.5 ~ 30GHz)	+16dBm (10 ~ 50MHz) +16dBm (0.05 ~ 10GHz) +15dBm (10 ~ 14GHz) +17dBm (14 ~ 16GHz) +16dBm (16 ~ 19GHz) +14dBm (19 ~ 26.5GHz) +14dBm (26.5 ~ 30GHz)

Max. Output Power (Standard Configuration, Option 400)	Port 2,4	+7dBm (30 ~ 32GHz) +9dBm (32 ~ 35GHz) +5dBm (35 ~ 40GHz) +10dBm (40 ~ 67GHz)	+11dBm (30 ~ 32GHz) +14dBm (32 ~ 35GHz) +11dBm (35 ~ 40GHz) +15dBm (40 ~ 67GHz)
Max. Output Power (Full Option)	Port 1,3	+2dBm (10 ~ 50MHz) (Filter mode) +6dBm (0.05 ~ 2GHz) (Filter mode) +4dBm (10 ~ 50MHz) (High-Power mode) +6dBm (0.05 ~ 2GHz) (High-Power mode) +6dBm (2 ~ 4GHz) +8dBm (4 ~ 10GHz) +6dBm (10 ~ 14GHz) +7dBm (14 ~ 16GHz) +4dBm (16 ~ 26.5GHz) +3dBm (26.5 ~ 30GHz) +1dBm (30 ~ 32GHz) +2dBm (32 ~ 35GHz) -3dBm (35 ~ 40GHz) -2dBm (40 ~ 67GHz)	+6dBm (10 ~ 50MHz) (Filter mode) +10dBm (0.05 ~ 2GHz) (Filter mode) +10dBm (10 ~ 50MHz) (High-Power mode) +9dBm (0.05 ~ 2GHz) (High-Power mode) +8dBm (2 ~ 4GHz) +10dBm (4 ~ 10GHz) +9dBm (10 ~ 14GHz) +11dBm (14 ~ 16GHz) +7dBm (16 ~ 26.5GHz) +6dBm (26.5 ~ 30GHz) +4dBm (30 ~ 32GHz) +5dBm (32 ~ 35GHz) +3dBm (35 ~ 40GHz) +4dBm (40 ~ 67GHz)
	Port 2,4	+4dBm (10 ~ 50MHz) +4dBm (0.05 ~ 10GHz) +6dBm (10 ~ 14GHz) +7dBm (14 ~ 16GHz) +4dBm (16 ~ 26.5GHz) +3dBm (26.5 ~ 30GHz)	+8dBm (10 ~ 50MHz) +7dBm (0.05 ~ 10GHz) +10dBm (10 ~ 14GHz) +12dBm (14 ~ 16GHz) +7dBm (16 ~ 26.5GHz) +6dBm (26.5 ~ 30GHz)

Max. Output Power (Full Option)	Port 2,4	+1dBm (30 ~ 32GHz) +2dBm (32 ~ 35GHz) -3dBm (35 ~ 40GHz) -2dBm (40 ~ 67GHz)	+5dBm (30 ~ 32GHz) +7dBm (32 ~ 35GHz) +3dBm (35 ~ 40GHz) +4dBm (40 ~ 67GHz)
Pulse Characteristic			
Pulse Width Setting Range		33ns ~ 60s	20ns ~ 70s
Pulse ON/OFF Ratio		64dB (0.01 ~ 4GHz) 80dB (4 ~ 67GHz)	
Network Parameter Characteristic			
System Dynamic Range (Standard, Option 400)		87dB (10 ~ 50MHz)	102dB (10 ~ 50MHz)
		110dB (50 ~ 500MHz)	124dB (50 ~ 500MHz)
		128dB (0.5 ~ 1GHz)	137dB (0.5 ~ 1GHz)
		131dB (1 ~ 2GHz)	141dB (1 ~ 2GHz)
		127dB (2 ~ 4GHz)	142dB (2 ~ 4GHz)
		131dB (4 ~ 10GHz)	142dB (4 ~ 10GHz)
		129dB (10 ~ 16GHz)	139dB (10 ~ 16GHz)
		131dB (16 ~ 26.5GHz)	138dB (16 ~ 26.5GHz)
		122dB (26.5 ~ 30GHz)	137dB (26.5 ~ 30GHz)
		120dB (30 ~ 32GHz)	134dB (30 ~ 32GHz)
		112dB (32 ~ 40GHz)	135dB (32 ~ 40GHz)
		116dB (40 ~ 50GHz)	128dB (40 ~ 50GHz)
		107dB (50 ~ 60GHz)	118dB (50 ~ 60GHz)
		106dB (60 ~ 64GHz)	116dB (60 ~ 64GHz)
		105dB (64 ~ 67GHz)	114dB (64 ~ 67GHz)

System dynamic range (Full Option)	87dB (10 ~ 50MHz)	100dB (10 ~ 50MHz)
	110dB (50 ~ 500MHz)	120dB (50 ~ 500MHz)
	122dB (0.5 ~ 1GHz)	129dB (0.5 ~ 1GHz)
	125dB (1 ~ 2GHz)	130dB (1 ~ 2GHz)
	121dB (2 ~ 4GHz)	130dB (2 ~ 4GHz)
	125dB (4 ~ 10GHz)	130dB (4 ~ 10GHz)
	123dB (10 ~ 16GHz)	129dB (10 ~ 16GHz)
	122dB (16 ~ 26.5GHz)	128dB (16 ~ 26.5GHz)
	113dB (26.5 ~ 30GHz)	125dB (26.5 ~ 30GHz)
	111dB (30 ~ 32GHz)	123dB (30 ~ 32GHz)
	105dB (32 ~ 40GHz)	118dB (32 ~ 40GHz)
	105dB (40 ~ 50GHz)	115dB (40 ~ 50GHz)
	103dB (50 ~ 60GHz)	112dB (50 ~ 60GHz)
	102dB (60 ~ 64GHz)	110dB (60 ~ 64GHz)
	100dB (64 ~ 67GHz)	106dB (64 ~ 67GHz)
Effective Directivity	35dB (0.01 ~ 2GHz)	65dB (0.01 ~ 2GHz)
	41dB (2 ~ 10GHz)	65dB (2 ~ 10GHz)
	38dB (10 ~ 20GHz)	59dB (10 ~ 20GHz)
	37dB (20 ~ 35GHz)	54dB (20 ~ 35GHz)
	37dB (35 ~ 50GHz)	48dB (35 ~ 50GHz)
	34dB (50 ~ 67GHz)	40dB (50 ~ 67GHz)
Effective Source Match	34dB (0.01 ~ 2GHz)	43dB (0.01 ~ 2GHz)
	36dB (2 ~ 10GHz)	40dB (2 ~ 10GHz)
	40dB (10 ~ 20GHz)	42dB (10 ~ 20GHz)

Effective Source Match	34dB (20 ~ 35GHz) 28dB (35 ~ 50GHz) 28dB (50 ~ 67GHz)	38dB (20 ~ 35GHz) 31dB (35 ~ 50GHz) 31dB (50 ~ 67GHz)
Effective Load Match	34dB (0.01 ~ 2GHz) 40dB (2 ~ 10GHz) 36dB (10 ~ 20GHz) 35dB (20 ~ 35GHz) 36dB (35 ~ 50GHz) 33dB (50 ~ 67GHz)	59dB (0.01 ~ 2GHz) 66dB (2 ~ 10GHz) 66dB (10 ~ 20GHz) 57dB (20 ~ 35GHz) 59dB (35 ~ 50GHz) 55dB (50 ~ 67GHz)
Reflection Tracking	±0.0200dB (0.01 ~ 2GHz) ±0.0110dB (2 ~ 10GHz) ±0.0330dB (10 ~ 35GHz) ±0.0200dB (35 ~ 50GHz) ±0.0310dB (50 ~ 67GHz)	±0.0014dB (0.01 ~ 2GHz) ±0.0025dB (2 ~ 10GHz) ±0.0052dB (10 ~ 35GHz) ±0.0038dB (35 ~ 50GHz) ±0.0094dB (50 ~ 67GHz)
Transmission Tracking	±0.100dB (0.01 ~ 2GHz) ±0.065dB (2 ~ 10GHz) ±0.100dB (10 ~ 20GHz) ±0.110dB (20 ~ 35GHz) ±0.094dB (35 ~ 50GHz) ±0.140dB (50 ~ 60GHz) ±0.150dB (60 ~ 67GHz)	±0.002dB (0.01 ~ 2GHz) ±0.002dB (2 ~ 10GHz) ±0.002dB (10 ~ 20GHz) ±0.003dB (20 ~ 35GHz) ±0.004dB (35 ~ 50GHz) ±0.006dB (50 ~ 60GHz) ±0.009dB (60 ~ 67GHz)
Others		
Amplitude Trace Noise	0.0500 (10 ~ 50MHz)	0.0030 (10 ~ 50MHz)
dB rms (1 kHz IF bandwidth)	0.0040 (50 ~ 100MHz)	0.0016 (50 ~ 100MHz)

Amplitude Trace Noise dB rms (1 kHz IF bandwidth)	0.0020 (100 ~ 500MHz)	0.0012 (100 ~ 500MHz)
	0.0030 (0.5 ~ 1GHz)	0.0009 (0.5 ~ 1GHz)
	0.0020 (1 ~ 26.5GHz)	0.0003 (1 ~ 26.5GHz)
	0.0030 (26.5 ~ 50GHz)	0.0014 (26.5 ~ 50GHz)
	0.0300 (50 ~ 67GHz)	0.0021 (50 ~ 67GHz)
Phase Trace Noise Deg rms (1 kHz IF bandwidth)	0.400 (10 ~ 50MHz)	0.019 (10 ~ 50MHz)
	0.020 (0.05 ~ 26.5GHz)	0.008 (0.05 ~ 26.5GHz)
	0.030 (26.5 ~ 50GHz)	0.008 (26.5 ~ 50GHz)
	0.200 (50 ~ 67GHz)	0.014 (50 ~ 67GHz)
IF Bandwidth	1Hz ~ 30MHz	
Amplitude Display resolution	0.001dB/div	
Phase Display Resolution	0.001°/div	
General Characteristic		
Port Connectors	1.85mm (head), system impedance 50 ohms	
Number of Measured Ports	S3674K / L standard: 2 ports; S3674K / L-400 option: 4 ports	
Peripheral Interface	GPIB interface, USB interface, DP interface, LAN interface	
Display	A 15.6-inch high-resolution touch display	
Dimensions	Overall dimensions (width and depth, including handles, feet and pads):	
	2-port: 475mm* 279mm* 560mm 4-port: 475mm *279mm* 660mm	
Max. Power Consumption	500W	
Power Supply	50Hz single-phase 220V or 50Hz / 60Hz single-phase 110V AC	
Max. Weight	50kg	

S3674N/P Technical Specification

Frequency Characteristic			
Frequency Range	10MHz ~ 90/110GHz		
Frequency Resolution	1Hz		
Frequency Accuracy	$\pm 1 \times 10^{-7}$ (23°C $\pm$ 3°C)		
Port Harmonic Suppression		S3674N	S3674P/PA
Port Harmonic Suppression		-13dBc (0.01 ~ 4GHz)	-13dBc (0.01 ~ 3.2GHz)
		-25dBc (4 ~ 14GHz)	-25dBc (3.2 ~ 14GHz)
		-51dBc (14 ~ 45GHz)	-31dBc (14 ~ 55GHz)
Port Power Characteristics		S3674N	S3674P/PA
Max. Output Power (Standard, Option 400)	Port 1,3	+4dBm (10 ~ 50MHz) +8dBm (0.05 ~ 2GHz) +10dBm (2 ~ 30GHz) +5dBm (30 ~ 67GHz) +1dBm (67 ~ 90GHz)	0dBm (10 ~ 50MHz) +7dBm (0.05 ~ 2GHz) +5dBm (2 ~ 3.2GHz) +11dBm (3.2 ~ 10GHz) +5dBm (10 ~ 24GHz) +1dBm (24 ~ 40GHz) +6dBm (40 ~ 60GHz) +3dBm (60 ~ 90GHz) +1dBm (90 ~ 110GHz)
	Port 2,4	+10dBm (10 ~ 50MHz) +13dBm (0.05 ~ 2GHz) +10dBm (2 ~ 30GHz) +5dBm (30 ~ 67GHz)	+5dBm (10 ~ 50MHz) +10dBm (0.05 ~ 2GHz) +8dBm (2 ~ 3.2GHz) +11dBm (3.2 ~ 10GHz)

Max. Output Power (Standard, Option 400)	Port 2,4	+1dBm (67 ~ 90GHz)	+5dBm (10 ~ 24GHz) +1dBm (24 ~ 40GHz) +6dBm (40 ~ 60GHz) +3dBm (60 ~ 90GHz) +1dBm (80 ~ 110GHz)
Pulse Characteristic		S3674N	S3674P/PA
Pulse Width Setting Range		33ns ~ 60s	/
Pulse ON/OFF Ratio		64dB (0.01 ~ 4GHz)	/
		70dB (4 ~ 90GHz)	/
Network Parameter Characteristic		S3674N	S3674P/PA
System dynamic range		70dB (10 ~ 500MHz)	70dB (10 ~ 500MHz)
		110dB (0.5 ~ 1GHz)	105dB (0.5 ~ 1GHz)
		120dB (1 ~ 16GHz)	115dB (1 ~ 16GHz)
		115dB (16 ~ 26.5GHz)	113dB (16 ~ 26.5GHz)
		113dB (26.5 ~ 35GHz)	110dB (26.5 ~ 50GHz)
		95dB (35 ~ 50GHz)	90dB (50 ~ 72GHz)
		90dB (50 ~ 72GHz)	100dB (72 ~ 90GHz)
		100dB (72 ~ 90GHz)	90dB (90 ~ 110GHz)
Effective Directivity		35dB (0.01 ~ 3.2GHz)	25dB (0.01 ~ 3.2GHz)
		30dB (3.2 ~ 10GHz)	25dB (3.2 ~ 10GHz)
		24dB (10 ~ 50GHz)	20dB (10 ~ 60GHz)
		25dB (50 ~ 60GHz)	21dB (60 ~ 67GHz)
		27dB (60 ~ 67GHz)	22dB (67 ~ 90GHz)
		20dB (67 ~ 90GHz)	20dB (90 ~ 110GHz)

Effective Load Match	35dB (0.01 ~ 3.2GHz) 41dB (3.2 ~ 10GHz) 33dB (10 ~ 50GHz) 30dB (50 ~ 90GHz)	29dB (0.01 ~ 3.2GHz) 30dB (3.2 ~ 10GHz) 28dB (10 ~ 20GHz) 33dB (20 ~ 26.5GHz) 30dB (26.5 ~ 50GHz) 29dB (50 ~ 60GHz) 28dB (60 ~ 67GHz) 25dB (67 ~ 110GHz)
Reflection Tracking	±0.050dB (0.01 ~ 3.2GHz) ±0.020dB (3.2 ~ 10GHz) ±0.033dB (10 ~ 26.5GHz) ±0.020dB (26.5 ~ 50GHz) ±0.031dB (50 ~ 67GHz) ±0.050dB (67 ~ 90GHz)	±0.050dB (0.01 ~ 3.2GHz) ±0.055dB (3.2 ~ 10GHz) ±0.090dB (10 ~ 20GHz) ±0.050dB (20 ~ 26.5GHz) ±0.075dB (26.5 ~ 50GHz) ±0.150dB (50 ~ 67GHz) ±0.300dB (67 ~ 110GHz)
Transmission Tracking	±0.149dB (0.01 ~ 3.2GHz) ±0.065dB (3.2 ~ 10GHz) ±0.110dB (10 ~ 26.5GHz) ±0.094dB (26.5 ~ 50GHz) ±0.140dB (50 ~ 60GHz) ±0.150dB (60 ~ 67GHz) ±0.200dB (67 ~ 90GHz)	±0.260dB (0.01 ~ 3.2GHz) ±0.164dB (3.2 ~ 10GHz) ±0.101dB (10 ~ 20GHz) ±0.097dB (20 ~ 26.5GHz) ±0.189dB (26.5 ~ 50GHz) ±0.343dB (50 ~ 60GHz) ±0.333dB (60 ~ 67GHz) ±0.449dB (67 ~ 90GHz) ±0.483dB (90 ~ 110GHz)

Others	S3674N	S3674P/PA
Amplitude Trace Noise dB rms (100Hz IF bandwidth)	0.050 (10 ~ 100MHz)	0.200 (10 ~ 100MHz)
	0.002 (0.1 ~ 26.5GHz)	0.007 (0.1 ~ 26.5GHz)
	0.005 (26.5 ~ 50GHz)	0.004 (26.5 ~ 50GHz)
	0.009 (50 ~ 90GHz)	0.005 (50 ~ 90GHz)
		0.006 (90 ~ 110GHz)
IF Bandwidth	1Hz ~ 30MHz	
Amplitude Display resolution	0.001dB/div	
Phase Display Resolution	0.01°/div	
General Characteristic		
Port Connectors	1.0mm (head), system impedance 50 ohms	
Number of Measured Ports	2 ports / 4 ports	
Peripheral Interface	GPIB interface, USB interface, DP interface, LAN interface	
Display	A 15.6-inch high-resolution touch display	
Dimensions	Overall dimensions (width and depth, including handles, feet and pads):	
	2-port: 475mm 279mm 560mm 4-port: 475mm 279mm 660mm	
Max. Power Consumption	500W	
Power Supply	50Hz single-phase 220V or 50Hz / 60Hz single-phase 110V AC	
Max. Weight	50kg	

Order Information

Model	Description
S3674B	Vector Network Analyzer (10 MHz ~ 9 GHz)
S3674C	Vector Network Analyzer (10 MHz ~ 14 GHz)
S3674D	Vector Network Analyzer (10 MHz ~ 20 GHz)
S3674E	Vector Network Analyzer (10MHz ~26.5GHz)
S3674F	Vector Network Analyzer (10 MHz ~ 32 GHz)
S3674G	Vector Network Analyzer (10 MHz ~ 44 GHz)

Model	Description
S3674H	Vector Network Analyzer (10 MHz ~ 50 GHz)
S3674K	Vector Network Analyzer (10 MHz ~ 53 GHz)
S3674L	Vector Network Analyzer (10 MHz ~ 67 GHz)
S3674N	Vector Network Analyzer (10 MHz ~ 90 GHz)
S3674P	Vector Network Analyzer (10 MHz ~ 110 GHz)

Standard Configuration

No.	Model	Quantity	Description
1	Power Cord Assembly	1	Standard three-core power cord
2	USB Mouse	1	
3	Quick Operation Guide	2	
4	Certificate of Conformity	1	
5	Aluminum Alloy Box	1	

S3674PA Vector Network Analyzer (10 MHz~110 GHz) System Configuration

No.	Name	Configuration	
		2-port model	4-port model
1	Vector Network Analyzer and options	S3674E/F/G/H/K/L+S20	S3674E/F/G/H/K/L+400+S20
2	Millimeter Wave Test Set	S3674-009	S3674-010
3	Coaxial Frequency Extender	S3674-011 (Quantity 2)	S3674-011 (Quantity 4)

S3674 Series Vector Network Analyzer General Option

No.	Model	Name	Function
1	S3674-006	English Version Option	With English front and rear panel and English operating system.
2	S3674-007	Linux Operating system	Configure the Linux operating system to replace the Windows operating system.
3	S3674-009	2-port Millimeter Wave Test Set	It is used for expanding the frequency of the vector network analyzer to expand the two-port vector network analyzer. Requires:Option S3674-S20.
4	S3674-010	4-port Millimeter Wave Test Set	It is used for the frequency expansion of vector network analyzer to realize the expansion function of four-port vector network analyzer. Requires:Option S3674-S20.
5	S3674-011	110GHz Coaxial Frequency Extender	For vector network analyzer frequency expansion to achieve coaxial S parameter measurement from 10 MHz to 110 GHz. The second port requires two modules and the four modules.2-Port Requires: Option S3674-009, S3674-S20. 4-Port Requires: Option 400 + S3674-010 + S3674-S20.
6	S3674-S05	S-parameter Signal Integrity Analysis Function	The signal integrity characteristics, such as frequency domain, time domain TDR and crosstalk, can automatically convert the graph curve into a test report. For the full range.
7	S3674-S07	Automatic Fixture Removal Function(AFR)	For automatic testing and removal of single-end and balance device measuring fixture. For the full range.
8	S3674-S10	Time Domain measurement Function	For time domain measurements, you can determine and analyze the discontinuous positions in devices, fixtures, or cables. For the full range.
9	S3674-S11	Advanced Time Domain Analysis Function	For the real difference mode and common mode excitation balance parameters measurement. For S3674B / C / D / E / F / G / H / K / L. Requires: Option 400 + 404 + S3674-S28.
10	S3674-S16	True difference measurement function	For the real difference mode and common mode excitation balance parameters measurement. For S3674B / C / D / E / F / G / H / K / L. Requires: Option 400 + 404 + S3674-S28.
11	S3674-S18	Fast CW Sweep Function	Data was read immediately using the FIFO buffer method. For the full range.
12	S3674-S20	Frequency Offset Function	For the frequency offset measurements. For the full range.
13	S3674-S22	Mixer/Converter Scalar Measurement	For the mixer scalar parameter measurement. For S3674B / C / D / E / F / G / H / K / L. Requires: Option S3674-S20.
14	S3674-S24	Embedded LO Frequency Converter Measurement	Used for embedded local vibration Converter measurement. For S3674B / C / D / E / F / G / H / K / L. 2-Port Requires: Option 204 + S3674-S20. 4-Port Requires: Option 404 + S3674-S20. Either S3674-S22 or 023 is required.
15	S3674-S26	Gain Compression Measurement	Gain compression measurement for active devices such as amplifiers. For S3674B / C / D / E / F / G / H / K / L.

16	S3674-S28	Phase-scan Measurement	For the phase-scan measurements. For S3674B / C / D / E / F / G / H / K / L. Requires: Option 400.
17	S3674-S31	THD Measurement	For the differential amplifier total harmonic distortion test function. For S3674B / C / D / E / F / G / H / K / L. Requires: Option 400 + S3674-S28.
18	S3674-042	Millimeter Wave Test Set-Waveguide Frequency Extender Bundle Cable	For the vector network analyzer waveguide expansion system, the spread frequency controller interconnects with the waveguide spread spectrum module, including two ports and four ports.
19	S3674-043	S3674E 4-port Frequency Extension System Cable	It is used for four-port vector network analyzer and waveguide spread frequency module.
20	S3674-044	S3674F/G/H 4-port Frequency Extension System Cable	It is used for four-port vector network analyzer and waveguide spread frequency module.
21	S3674-045	S3674K/L 4-port Frequency Extension System Cable	It is used for four-port vector network analyzer and waveguide spread frequency module.
22	S3674-060	External Operation Panel	For expanding the front panel for remote control and increasing the number of buttons.
23	S3674-061	Extension Table for Test	Desktop extension for the test, length and width =500mm 350mm.
24	S3674-062	Rack mount kit	Dedicated kit installed in the cabinet.
25	S3674-063	User Manual (paper version)	Provide a detailed user manual in the paper version.
26		31101 N-type 50 Ω Mechanical calibration kit	For complete machine calibration (DC~18GHz)
27		31121A 3.5mm Mechanical calibration kit	For complete machine calibration (DC~6GHz)
28		31121 3.5mm Mechanical calibration kit	For complete machine calibration (DC~26.5GHz)
29		20202 3.5mm Mechanical calibration kit	For complete machine calibration (DC~9GHz)
30		31123 2.4mm Mechanical calibration kit	For complete machine calibration (DC~40GHz)

31		31123A 2.4mm Mechanical calibration kit	For complete machine calibration (DC~50GHz)
32		20402 Electronic calibration kit	For overall calibration (300 kHz ~ 18 GHz N 2 port)
33		20403 Electronic calibration kit	For complete machine calibration (10MHz~26.5GHz 3.5mm 2-port)
34		20404 Electronic calibration kit	For overall calibration (10 MHz ~ 50 GHz 2.4 mm 2-port)
35		20405 Electronic calibration kit	For overall calibration (10 MHz to 20 GHz 3.5 mm four-port)
36		20409 Electronic calibration kit	For overall calibration (10 MHz ~ 67 GHz 1.85 mm 2-port)
37		FB0HA0HB025.0 3.5mm Gore test cable	For complete machine measurement (3.5mm positive) Suitable for S3674B / C / D / E
38		FB0HA0HC025.0 3.5mm Gore test cable	For complete machine measurement (test end 3.5mm Yin) Suitable for S3674B / C / D / E
39		FB0HA0AH025.0 3.5mm-N-type Gore test cable	For machine measurement (N type at test end) Suitable for S3674B / C / D / E
40		FB0HA0AL025.0 3.5mm-N-type Gore test cable	For the complete machine measurement (N-type Yin at the test end) Suitable for S3674B / C / D / E
41		E0BN0BM025.0 2.4mm Gore test cable	For complete machine measurement (2.4mm positive) Suitable for S3674F / G / H
42		FE0BN0BL025.0 2.4mm Gore test cable	For complete machine measurement (test end 2.4mm Yin) Suitable for S3674F / G / H
43		FE0BN0AH025.0 2.4mm-N-type Gore test cable	For machine measurement (N type at test end) Suitable for S3674F / G / H
44		FE0BN0AL025.0 The 2.4mm-N type Gore test cable	For the complete machine measurement (N-type Yin at the test end) Suitable for S3674F / G / H
45		FE0BN0HB025.0 2.4mm-3.5mm Gore test cable	For complete machine measurement (3.5mm positive) Suitable for S3674F / G / H

46		FE0BN0HC025.0 2.4mm-3.5mm Gore test cable	For complete machine measurement (test end 3.5mm Yin) Suitable for S3674F / G / H
47		FE0BN0HR025.0 2.4mm-2.92mm Gore test cable	For complete machine measurement (test end 2.92mm positive) Suitable for S3674F / G / H
48		FE0BN0HQ025.0 2.4mm-2.92mm Gore test cable	For complete machine measurement (2.92mm shade at test end) Suitable for S3674F / G / H
49		FF0CN0CM025.0 1.85mm Gore test cable	For machine measurement (1.85mm positive) Suitable for S3674K / L
50		FF0CN0CL025.0 1.85mm Gore test cable	For complete machine measurement (test end 1.85mm Yin) Suitable for S3674K / L
51		87308A 3.5mm test cable	For complete machine measurement (3.5mm positive) Suitable for S3674B / C / D / E
52		87308A 3.5mm test cable	For complete machine measurement (test end 3.5mm Yin) Suitable for S3674B / C / D / E
53		87308HA 2.4mm test cable	For complete machine measurement (test end 3.5mm Yin) Suitable for S3674B / C / D / E
54		87308HB 2.4mm test cable	For complete machine measurement (2.4mm positive) Suitable for S3674F / G / H
55		87302NN 1.85mm test cable	For complete machine measurement (test end 1.85mm Yin) Suitable for S3674K / L
56		87302NM 1.85mm test cable	For machine measurement (1.85mm positive) Suitable for S3674K / L
57		S87230 USB Power Sensor	For power calibration (9 kHz ~ 6 GHz)
58		S87231 USB Power Sensor	For power calibration (10 MHz ~ 18 GHz)
59		S87232 USB Power Sensor	For power calibration (50MHz~26.5GHz)
60		S87233 USB Power Sensor	For power calibration (50 MHz ~ 40 GHz)

61		87601 Microwave Assistant (Type-N)	Coaxial adaptor package (N-type interface converted to 3.5mm, 2.4mm interface, etc.)
62		87601A Microwave Assistant (3.5mm)	Coaxial adaptor package (3.5mm interface converted to N-type, 2.4mm interface, etc.)
63		87601B Microwave Assistant (2.92mm)	Coaxial adapter package (2.92mm interface converted to 2.4mm interface, etc.)
64		87601C Microwave Assistant (2.4mm)	Coaxial adaptor package (2.4mm interface to N, 3.5mm, 2.92mm, 1.85mm, etc.)

S3674B Vector Network Analyzer Option

No.	Model	Name	Function
1	S3674B-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674B-201 + S3674B-204 4-Port Requires: Option S3674B-401 + S3674B-404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2	S3674B-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3	S3674B-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674B- 400 + S3674B-404 + S3674-S20.
4	S3674B-201	2-port Programmable Step Attenuator	Configure 2-70dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674B-204.
5	S3674B-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674B-204, S3674B-205 cannot be configured at the same time.
6	S3674B-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
7	S3674B-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674B-201+ S3674B-204, S3674B-203 cannot be configured at the same time.
8	S3674B-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 9 GHz.
9	S3674B-401	4-port programmable Step Attenuator	Install 4-70dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674B- 400 + S3674B-404.
10	S3674B-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement.Requires: Option S3674B- 400 +S3671B- 404 + S3674-S20.
11	S3674B-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674B-400 + S3674B-404, S3674B-405 cannot be configured at the same time.
12	S3674B-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674B-400.
13	S3674B-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674B-400 + S3674B-401 + S3672B-404. S3674B-403 cannot be configured at the same time.
14	S3674B-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.

The S3674C Vector Network Analyzer Option

No.	Model	Name	Function
1	S3674C-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674C-201 + S3674C-204. 4-Port Requires: Option S3674C-401 + S3674C-404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2	S3674C-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3	S3674C-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674C-400 + S3674C-404 + S3674-S20.
4	S3674C-201	2-port Programmable Step Attenuator	Configure 2-70dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674C-204.
5	S3674C-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674C-204. S3674C-205 cannot be configured at the same time.
6	S3674C-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
7	S3674C-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674C-201 + S3674C-204. S3674C-203 cannot be configured at the same time.
8	S3674C-400	4-port measurement	Dual source excitation four-port vector network analyzer configuration with frequency range 10 MHz to 14 GHz.
9	S3674C-401	4-port programmable Step Attenuator	Install 4-70dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674C-400 + S3674C-404.
10	S3674C-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674C-400 + S3674C-404 + S3674-S20.
11	S3674C-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674C-400 + S3674C-404. S3674C-405 cannot be configured at the same time.
12	S3674C-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674C-400.
13	S3674C-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674C-400 + S3674C-401 + S3674C-404. S3674C-403 cannot be configured at the same time.
14	S3674C-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.

The S3674D Vector Network Analyzer Option

No.	Model	Name	Function
1	S3674D-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. Note: Two-port electronic calibrators and noise sources need to be purchased separately. 2-Port Requires: Option S3674D-201 + S3674D-204. 4-Port Requires: Option S3674D-401 + S3674D-404.
2	S3674D-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3	S3674D-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674D-400 + S3674D-404 + S3674-S20.
4	S3674D-201	2-port Programmable Step Attenuator	Configure 2-70dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674D- 204.
5	S3674D-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674D- 204, S3674D-205 cannot be configured at the same time.
6	S3674D-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
7	S3674D-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674D-201 + S3674D-204, S3674D-203 cannot be configured at the same time.
8	S3674D-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 20 GHz.
9	S3674D-401	4-port programmable Step Attenuator	Install 4-70dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674D- 400 + S3674D- 404.
10	S3674D-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement.Requires: Option S3674D- 400 + S3674D-404 + S3674-S20.
11	S3674D-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674D-400 + S3674D-404, S3674D-405 cannot be configured at the same time.
12	S3674D-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674D-400.
13	S3674D-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674D-400 + S3674D-401 + S3674D-404. S3674D-403 cannot be configured at the same time.
14	S3674D-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.

The S3674E Vector Network Analyzer Option

No.	Model	Name	Function
1	S3674E-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674E-201 + S3674E-204. 4-Port Requires: Option S3674E-401 +S3674E-404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2	S3674E-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3	S3674E-018	Multi-port Expansion Device	For the extended vector network analyzer is 16 port. Requires: Option S3674E- 400 +S3674E-404.
4	S3674E-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674E- 400 +S3674E- 404 + S3674-S20.
5	S3674E-201	2-port Programmable Step Attenuator	Configure 2-70dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674E-204.
6	S3674E-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674E-204, S3674E-205 cannot be configured at the same time.
7	S3674E-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
8	S3674E-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674E-201 +S3674E-204, S3674E-203 cannot be configured at the same time.
9	S3674E-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with frequency range 10MHz~26.5GHz.
10	S3674E-401	4-port programmable Step Attenuator	Install 4-70dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674E-400 +S3674E- 404.
11	S3674E-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement.Requires: Option S3674E-400 +S3674E- 404 + S3674-S20.
12	S3674E-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674E-400 +S3674E-404, S3674E-405 cannot be configured at the same time.
13	S3674E-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674E- 400.
14	S3674E-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674E-400 +S3674E-401 + S3674E-404,S3674E-403 cannot be configured at the same time.
15	S3674E-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.

The S3674F Vector Network Analyzer Option

No.	Model	Name	Function
1	S3674F-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674F-201 +S3674F- 204. 4-Port Requires: Option S3674F-401 +S3674F- 404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2	S3674F-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3	S3674F-018	Multi-port Expansion Device	For the extended vector network analyzer is 16 port. Requires: Option S3674F-400 +S3674F-404.
4	S3674F-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674F-400 +S3674F- 404 + S3674-S20.
5	S3674F-201	2-port Programmable Step Attenuator	Configure 2-60dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674F-204.
6	S3674F-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674F-204, S3674F-205 Can not be configured at the same time.
7	S3674F-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
8	S3674F-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674F-201 +S3674F- 204, S3674F-203 cannot be configured at the same time.
9	S3674F-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 32 GHz.
10	S3674F-401	4-port programmable Step Attenuator	Install 4-60dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674F-400 +S3674F- 404.
11	S3674F-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement.Requires: Option S3674F-400 +S3674F- 404 + S3674-S20.
12	S3674F-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674F-400 +S3674F-404, S3674F-405 cannot be configured at the same time.
13	S3674F-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674F- 400.
14	S3674F-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674F- 400 + S3674F-401 +S3674F-404, S3674F-403 cannot be configured at the same time.
15	S3674F-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.

The S3674G Vector Network Analyzer Option

No.	Model	Name	Function
1	S3674G-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674G-201 + S3674G-204; 4-Port Requires: Option S3674G-401 + S3674G-404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2	S3674G-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3	S3674G-018	Multi-port Expansion Device	For the extended vector network analyzer is 16 port. Requires: Option S3674G-400 + S3674G-404.
4	S3674G-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674G-400 +S3674G-404 +S3674-S20.
5	S3674G-201	2-port Programmable Step Attenuator	Configure 2-60dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674G-204.
6	S3674G-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674G-204, S3674G-205 cannot be configured at the same time.
7	S3674G-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
8	S3674G-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674G-201+ S3674G-204, S3674G-203 cannot be configured at the same time.
9	S3674G-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 44 GHz.
10	S3674G-401	4-port programmable Step Attenuator	Install 4-60dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674G-400 +S3674G-404.
11	S3674G-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement.Requires: Option S3674G-400 +S3674G-404 +S3674G-S20.
12	S3674G-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674G-400 +S3674G-404, S3674G-405 cannot be configured at the same time.
13	S3674G-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674G-400.
14	S3674G-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674G-400 +S3674G-401 +S3674G-404, S3674G-403 cannot be configured at the same time.
15	S3674G-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.

The S3674H Vector Network Analyzer Option

No.	Model	Name	Function
1	S3674H-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674H-201 + S3674H-204 4-Port Requires: Option S3674H-401 +S3674H- 404 (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2	S3674H-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3	S3674H-018	Multi-port Expansion Device	For the extended vector network analyzer is 16 port. Requires: Option S3674H-400 +S3674H-404.
4	S3674H-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674H-400 +S3674H- 404 + S3674-S20.
5	S3674H-201	2-port Programmable Step Attenuator	Configure 2-60dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674H-204.
6	S3674H-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674H-204, S3674H-205 cannot be configured at the same time.
7	S3674H-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
8	S3674H-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674H-201 +S3674H-204, S3674H-203 cannot be configured at the same time.
9	S3674H-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 50 GHz.
10	S3674H-401	4-port programmable Step Attenuator	Install 4-60dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674H-400+S3674H- 404.
11	S3674H-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674F-400 +S3674F- 404 + S3674-S20.
12	S3674H-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674H-400 + S3674H-404, S3674H-405 cannot be configured at the same time.
13	S3674H-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674H-400.
14	S3674H-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674H-400 + S3674H-401+S3674H-404. S3674H-403 cannot be configured at the same time.
15	S3674H-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.

The S3674K Vector Network Analyzer Option

No.	Model	Name	Function
1	S3674K-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
2	S3674K-018	Multi-port Expansion Device	For the extended vector network analyzer is 16 port. Requires: Option S3674K- 400 + S3674K-404.
3	S3674K-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674K-400+S3674K-404+S3674-S20.
4	S3674K-201	2-port Programmable Step Attenuator	2-50dB programmed step attenuators for source path and 2-50dB programmed step attenuators for receiver path. Requires: Option S3674K-204.
5	S3674K-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674K-204, S3674K-205 cannot be configured at the same time.
6	S3674K-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
7	S3674K-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674K-201 + S3674K-204, S3674K-203 cannot be configured at the same time.
8	S3674K-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 53 GHz.
9	S3674K-401	4-port programmable Step Attenuator	4-50dB programmed step attenuators for source path and 4-50dB programmed step attenuators for receiver path. Requires: Option S3674K- 400 +S3674K- 404.
10	S3674K-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674K- 400 +S3674K- 404 +S3674- S20.
11	S3674K-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674K-400+S3674K-404, S3674K-405 cannot be configured at the same time.
12	S3674K-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674K-400.
13	S3674K-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674K-400+S3674K-401 +S3674K-404, S3674H-403 cannot be configured at the same time.
14	S3674K-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.

The S3674L Vector Network Analyzer Option

No.	Model	Name	Function
1	S3674L-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
2	S3674L-018	Multi-port Expansion Device	For the extended vector network analyzer is 16 port. Requires: Option S3674L- 400 +S3674L- 404.
3	S3674L-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674L-400 +S3674KL-404 +S3674-S20.
4	S3674L-201	2-port Programmable Step Attenuator	2-50dB programmed step attenuators for source path and 2-50dB programmed step attenuators for receiver path. Requires: Option S3674L-204.
5	S3674L-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674L-204,S3674L-205 cannot be configured at the same time.
6	S3674L-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
7	S3674L-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674L-201 + S3674L-204, S3674L-203 cannot be configured at the same time.
8	S3674L-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 67 GHz.
9	S3674L-401	4-port programmable Step Attenuator	4-50dB programmed step attenuators for source path and 4-50dB programmed step attenuators for receiver path. Requires: Option S3674L-400 + S3674L-404.
10	S3674L-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674L-400 +S3674L-404 + S3674-S20.
11	S3674L-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674L-400 +S3674L-404, S3674L-405 cannot be configured at the same time.
12	S3674L-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674L-400.
13	S3674L-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674L-400 + S3674L-401 + S3674L-404, S3674L-403 cannot be configured at the same time.
14	S3674L-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.

The S3674N Vector Network Analyzer Option

No.	Model	Name	Function
1	S3674N-400	4-port Measurement Option	Dual source excitation four-port vector network analyzer configuration with frequency range 10 MHz to 90 GHz.

SALUKI TECHNOLOGY INC.

Address: No.1-2 Section 5, Zhongxiao East Rd, Xinyi District, Taipei, Taiwan.

E-mail: sales@salukitec.com

Web: www.salukitec.com

Tel: 886. 909 602 109