

# SPA-0P6-6-500 Solid State Power Amplifier

(0.6GHz - 6GHz, 500W)

## Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Extremely load-resistant
- Forward & reverse power monitoring
- Over voltage, over temperature, over current protection
- CE, RoHS certification



## Overview

Saluki SPA-0P6-6-500 is a solid-state RF power amplifier with an output frequency of 0.6GHz to 6GHz and an output power of 500W. Its design is based on the most advanced GaN technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

## Technical Specifications



SPA-0P6-6-500			
<b>Frequency Range</b>	0.6GHz - 6GHz	<b>Input Power</b>	0dBm (max.)
<b>Output Power</b>	500W (min.)	<b>Harmonic</b>	-23dBc@Po=400W (max.)
<b>P1dB Output Power</b>	400W (min.)	<b>Spurious</b>	-60dBc (max.)
<b>Gain</b>	57dB (min.)	<b>Input VSWR</b>	1.5:1 (typ.)
<b>Gain Flatness</b>	± 3dB (max.)	<b>Impedance</b>	50 ohm
<b>Adjustable Gain</b>	20dB (max.)	<b>Cooling Type</b>	Air cooling

# SPA-0P6-6-500 Solid State Power Amplifier

(0.6GHz - 6GHz, 500W)

<b>Input Port</b>	Type-N (female)	<b>Output Port</b>	7/16 (female)
<b>Communication Interface</b>	RS485, LAN, GPIB	<b>Power Supply</b>	AC 380V±10%, 50/60Hz
<b>Dimension</b>	1270×503×610 mm	<b>Weight</b>	60kg
<b>Operating Temperature</b>	0 - 40°C		

## Outline Structure

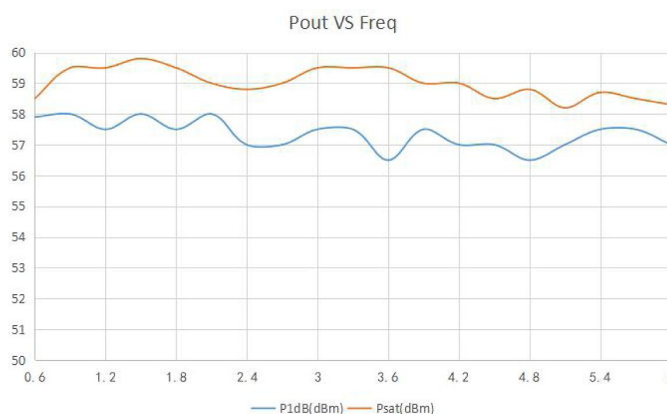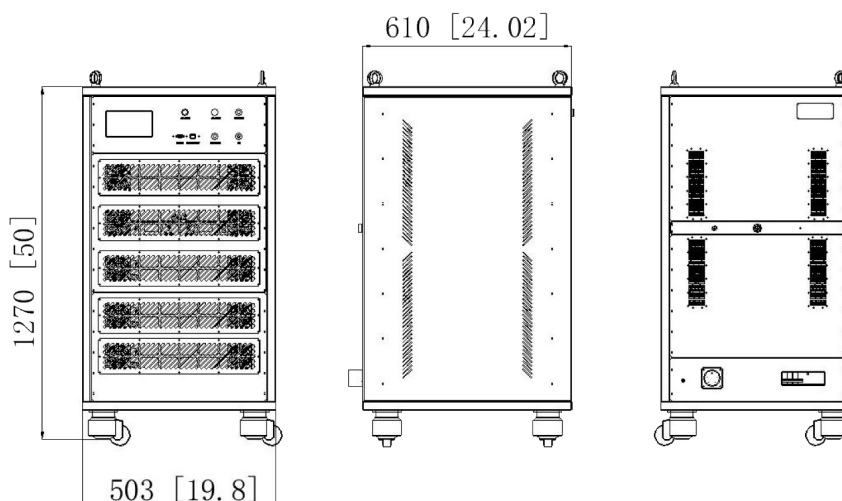

*Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.*