

# SPA-2-6-300 Solid State Power Amplifier

(2GHz - 6GHz, 300w)

## Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Forward/reverse power monitoring
- Extremely load-resistant
- Over voltage, over temperature, over current protection.
- Optional overdrive protection
- CE, RoHS certification



## Overview

Saluki SPA-2-6-300 is a solid-state RF power amplifier with an output frequency of 2GHz to 6GHz and an output power of 300w. Its design is based on the most advanced GaN technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

## Technical Specifications


SPA-2-6-300			
Frequency Range	2GHz - 6GHz	Input Power	0dBm (max.)
Output Power	300w (min.)	Harmonic	-10dBc (typ.)
Gain	58dB (min.)	Background Noise	-40dBm/MHz (max.)
Gain Flatness	± 4dB (max.)	Spurious	-60dBc (max.)
Adjustable Gain	20dB (max.)	Input VSWR	1.5:1 (typ.)
Impedance	50 ohm	VSWR Protection	3:1

# SPA-2-6-300 Solid State Power Amplifier

(2GHz - 6GHz, 300w)

<b>Input Port</b>	N-F, front panel	<b>Output Port</b>	7/16, front panel
<b>Monitoring Port</b>	SMA (female)	<b>Cooling Type</b>	Air cooling
<b>Communication Interface</b>	RS485, LAN	<b>Power Supply</b>	AC 220V±10%, 50/60Hz
<b>Dimension</b>	5U	<b>Operating Temperature</b>	0 - 50℃

## Outline Structure

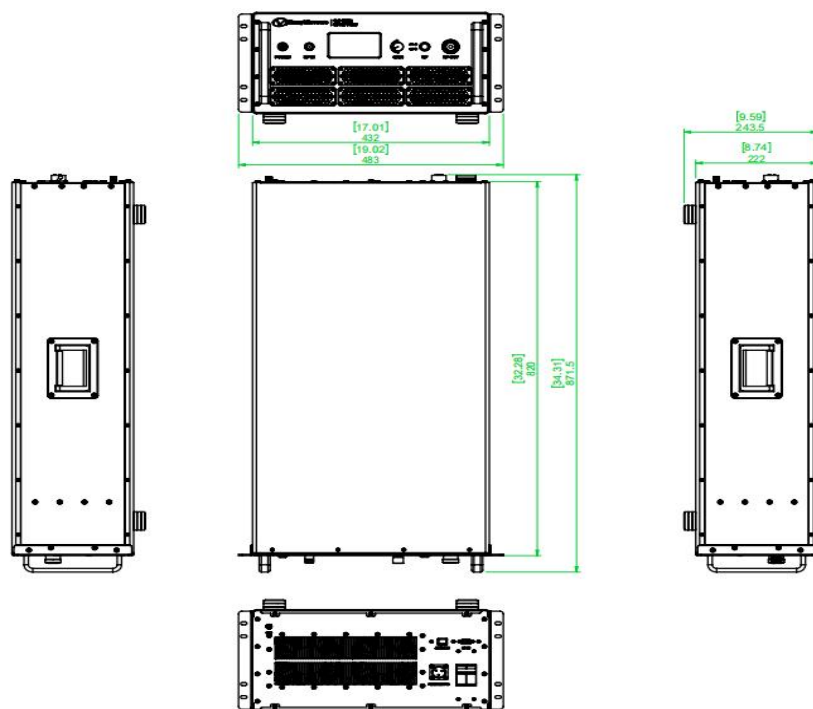

## Options

001	Forward/reverse power monitoring
001	Input power detection
002	GPIB interface

**Note:** Information will conduct the necessary updates, the contents of this document are subject to change without notice.