

SPA-2-8-500 Solid State Power Amplifier

(2GHz - 8GHz, 500w)

Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Forward/reverse power monitoring
- Extremely load-resistant
- Over voltage, over temperature, over current protector.
- Optional overdrive protection
- CE, RoHS certification



Overview

Saluki SPA-2-8-500 is a solid-state RF power amplifier with an output frequency of 2GHz to 8GHz and an output power of 500w. Its design is based on the most advanced GaN technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

Technical Specifications


| SPA-2-8-500 | | | |
|-----------------|--------------|------------------|-------------------|
| Frequency Range | 2GHz - 8GHz | Input Power | 0dBm (max.) |
| Output Power | 500w (min.) | Harmonic | -15dBc (typ.) |
| Gain | 57dB (min.) | Background Noise | -40dBm/MHz (max.) |
| Gain Flatness | ± 4dB (max.) | Spurious | -60dBc (max.) |
| Adjustable Gain | 20dB (max.) | Input VSWR | 2:1 (typ.) |
| Impedance | 50 ohm | VSWR Protection | 4:1 |

SPA-2-8-500 Solid State Power Amplifier

(2GHz - 8GHz, 500w)

| | | | |
|--------------------------------|-----------------|------------------------------|-------------------------|
| Input Port | N-F | Output Port | 7/16 |
| Monitoring Port | SMA (female) | Cooling Type | Air cooling |
| Communication Interface | RS485, LAN | Power Supply | AC 220V±10%, 50/60Hz |
| Dimension | 19"1180*700*650 | Operating Temperature | 0 - 50°C |

Outline Structure

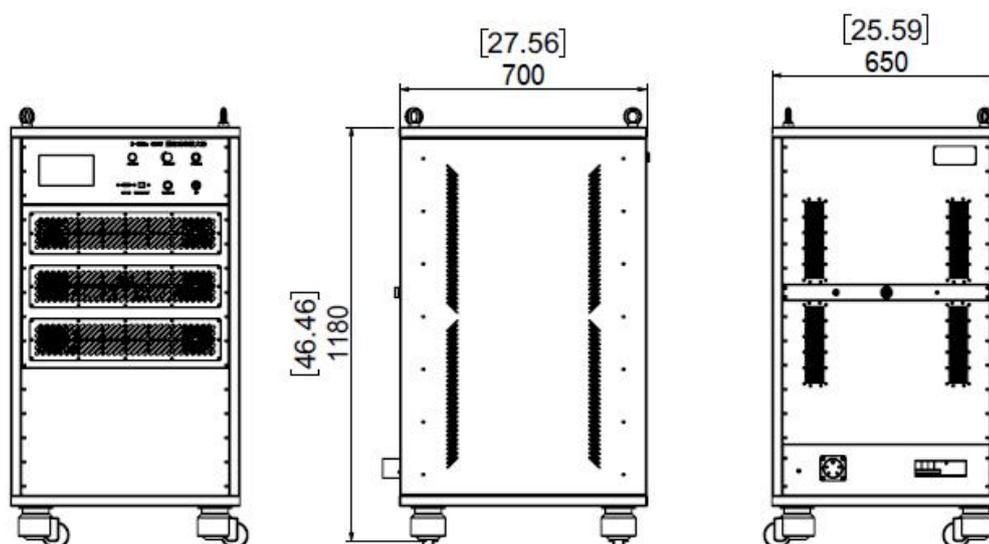

Options

| | |
|-----|----------------------------------|
| 001 | Forward/reverse power monitoring |
| 001 | Input power detection |
| 002 | GPIB interface |

Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.