

SPA-80M-1-200 Solid State Power Amplifier

(80MHz - 1GHz, 200W)

Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- Low power consumption
- Low spurious signal
- Extremely load-resistant
- Built-in control, monitoring and protection circuit
- Over voltage, over temperature, over current protection



Overview

Saluki SPA-80M-1-200 is a solid-state RF power amplifier with an output frequency of 80MHz to 1GHz and an output power of 200W. Its design is based on the most advanced LD M O S technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

Technical Specifications


SPA-80M-1-200			
Frequency Range	80MHz - 1GHz	Spurious	-60dBc (max.)
Psat	200W (min.)	Input resistance	50Ω
Gain	53dB (min.)	Input VSWR	1.5:1 (typ.)
Gain Flatness	± 4 dB (max.)	Input Port	N-F
Adjustable Gain	20dB (max.)	Output Port	N-F
Input Power	0dBm (max.)	Monitoring Port	RS485, LAN
Harmonic	-15dBc (max.)	Power Supply	AC220V±10%,50/60Hz
Noise Floor	-30dBm/MHz (max.)	Operating Temperature	0-50℃

SPA-80M-1-200 Solid State Power Amplifier

(80MHz - 1GHz, 200W)

Dimension	19", 3U	Cooling Type	Air cooling
-----------	---------	--------------	-------------

Outline Structure

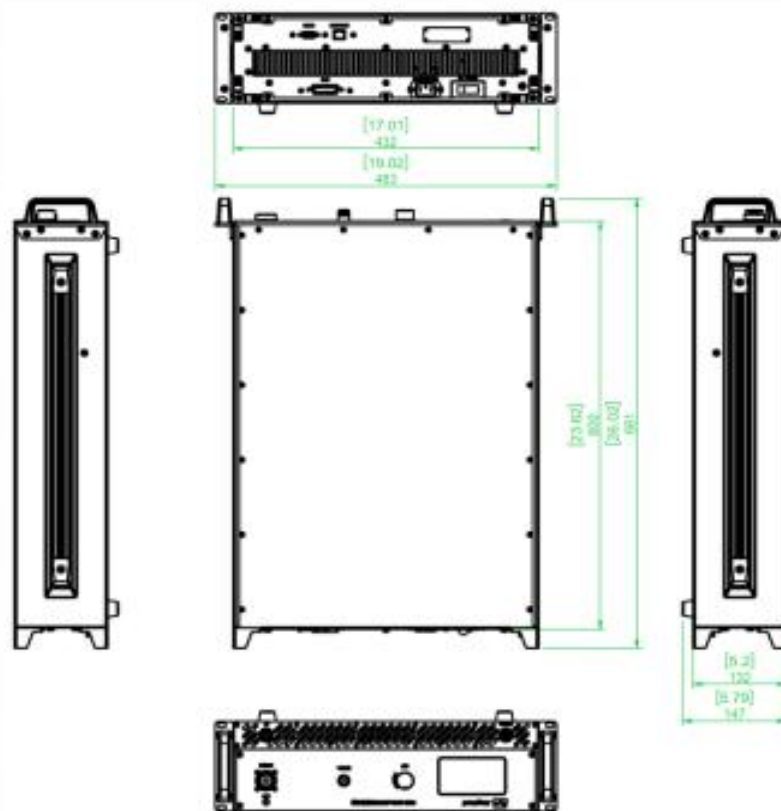

Options

Module No.	Item
001	Overdrive protection
002	GPIB interface

Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.