



S3674 Series

Vector Network Analyzer

S3674B/C/D/E/F/G/H/K/L/N/P/PA/QA

(500Hz/10MHz – 9/14/20/26.5/32/44/50/53/67/90/110/120 GHz)



SALUKI Technology Inc.

Product Overview

Saluki S3674 Series vector network analyzer is the peak of technological innovation which can easily deal with the severe challenges brought by semiconductor chip testing, material testing, antenna testing, high-speed cable testing, microwave component testing and so on. Excellent RF characteristics, flexible hardware configuration and rich software functions complement each other, only one connection can be completed in a variety of measurement tasks. Innovative human-computer interaction design can help you complete the required measurement Settings quickly and conveniently, and the large touch screen brings you a flexible and efficient operation experience.

Main Features

- 500Hz to 120GHz broad band coaxial coverage
- 30 MHz IF bandwidth, measurement points 200001
- Ultra-fast scanning speed, 140dB large dynamic range
- 21 functions including pulse S parameter measurement, frequency conversion device measurement, gain compression measurement, noise figure measurement, spectrum measurement, signal integrity measurement, differential I/Q measurement, active intermodulation distortion measurement, automatic fixture removal, etc.
- SCPI instruction synchronization record, script generated with one key
- 15.6-inch multi-parameter display on the same screen, with multi-touch operation



S3674L 2-port VNA (10 MHz to 67GHz)



S3674P 4-port VNA (10 MHz to 110GHz)



S3674QA 4-port VNA (10 MHz to 120GHz)

Ultra Wide Band Vector Network Analyzer

500 Hz to 120 GHz, coaxial coverage

Ultra-wide frequency coverage, low frequency expansion to 500Hz, the highest test frequency up to 120GHz.



Excellent performance

- Faster measurement speed, improve the production efficiency
- Higher measurement accuracy, to meet the measurement requirements of higher specification products
- Up to 30 MHz IF bandwidth, can achieve fast test and narrow pulse test
- The maximum number of 200001 measurement points can bring more refined measurement results
- Using ultra-wide band base wave mixing technology and source output power improvement technology, we greatly improve the dynamic range, and the optimal dynamic range can reach 140dB, providing more accurate and reliable measurement results for the test of large dynamic devices such as filters

Rich Functions

With pulse S-parameter measurement, frequency conversion device measurement, gain compression measurement, noise coefficient measurement, spectrum measurement, signal integrity measurement, total harmonic distortion measurement, active intermodulation distortion measurement, automatic fixture removal of 21 kinds of function, combined with the specific application form system level test solution, accurate joint user needs of different industries.

- Supports S-parameters, differential (balanced) parameters, and receiver measurements.
- Supports limit testing, ripple testing, and filter bandwidth testing.
- Supports calibration methods such as SOLT, SOLR, SSLT, SSST, TRM, and TRL.
- Supports custom calibration components, other calibration components, electronic calibration, and waveguide calibration.
- Supports display formats such as logarithmic magnitude, phase, group delay, Smith chart, linear magnitude, VSWR, real part, imaginary part, polar coordinates, and impedance.




Pulse S-parameter Measurement

Built-in pulse modulation. Fast and simple operations

Built-in 4-channel pulse generator for internal source modulation, IF gate control, and output from the rear panel. The pulse width and time delay of each pulse generator can be set independently.

Source modulation sources include multiple states such as rear panel input, internal pulse generator, normally open and normally closed. The source of the vector network analyzer can be modulated by external pulses or modulated by an external modulator and measured by triggering the synchronization mode. The pulse S parameter measurement function provides strong support for the test of radar T / R components and antenna signal and transceiver module.

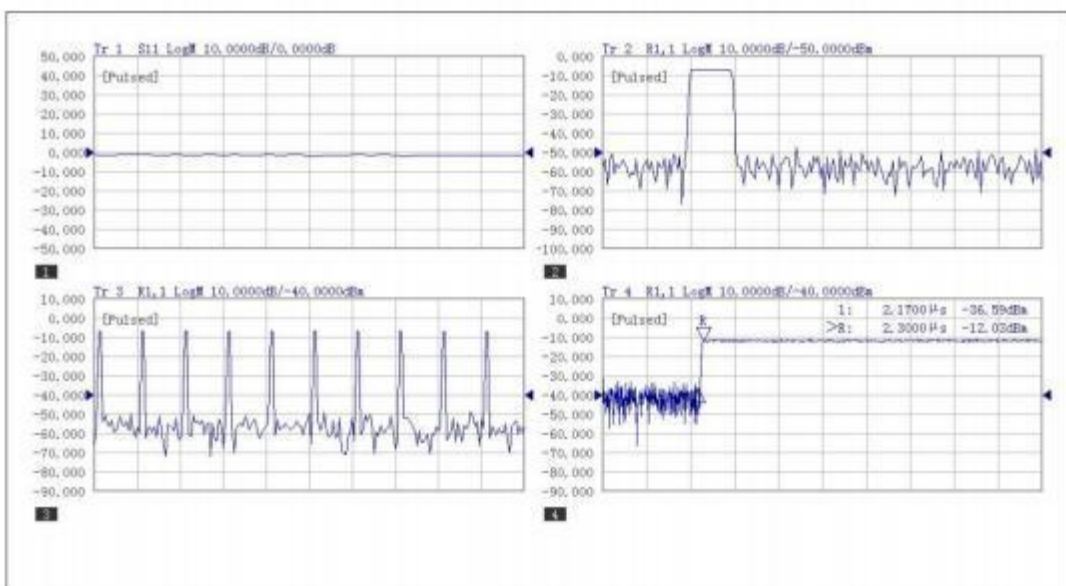



Excellent pulse test capability

- Pulse period can be up to 70 s
- The pulse resolution was as low as 8.3 ns
- Broadband synchronous pulse test pulse width < 42 ns
- Internal pulse synchronization or external pulse synchronization mode
- 7 source modulation modes, such as external and internal pulses
- 4 pulse generators with pulse width and independent delay
- Automatic broadband synchronous measurement and narrow-band asynchronous measurement function
- Adaptive narrow-band filter to improve the narrow-pulse test capability
- 3 for triggering input and output modules to provide flexible system coordination function
- Functions of sweeping pulse S parameter test, pulse envelope test and pulse point test


Mixer/Converter Scalar Measurement

Comprehensive Mixer/Converter Characteristic measurement

Provide comprehensive measurement setting of Mixer/Converter characteristics, support double-order primary vibration and external primary vibration source input; support multiple scanning types such as linear sweep, power sweep and segment sweep; simple setting can automatically complete the complex mixer RF, double LO, IF frequency doubling and frequency distribution; support the setting of source port power, local vibration port power, attenuation, and power sweep characteristics.

Simple and efficient frequency conversion loss amplitude response characteristic test and analysis

Provide the most direct and accurate mixer / Converter frequency conversion loss amplitude response measurement function. Enhance power calibration by power meter to complete the RF and IF full band calibration.

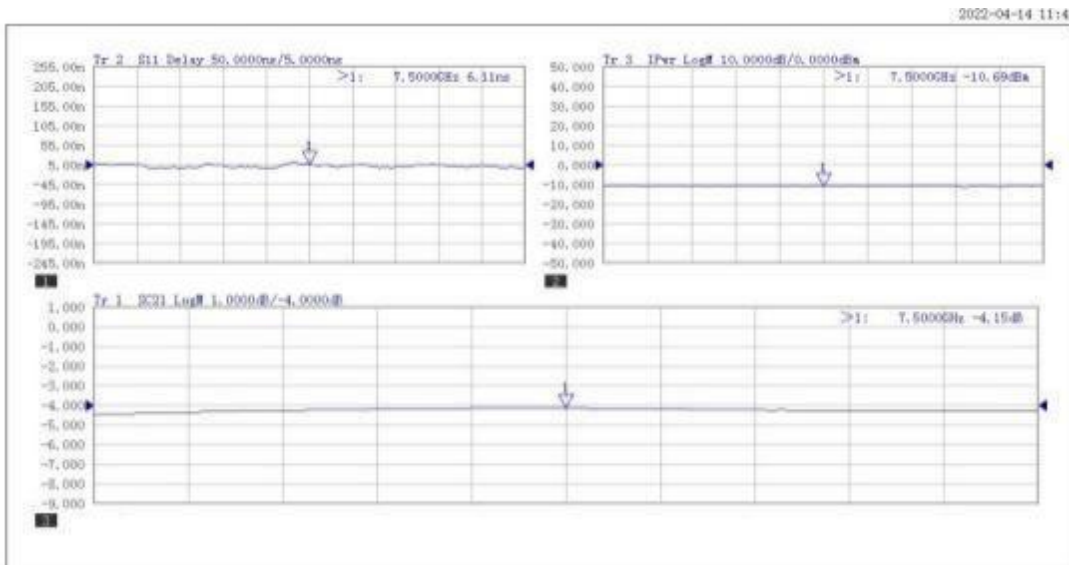


Independent dual-power calibration method realizes the test and analysis of non-inserted frequency conversion device

Support dual independent source power and receiver calibration, provides the solution of non-insertion connection mode through port separation mode, instead of connector de-embedding, power meter de-embedding and other ways, to provide a more accurate calibration mode for non-insertion measured parts.

Mixer/Converter Vector Measurement

A single instrument simultaneously completes the amplitude response and the absolute phase timely delay response test analysis

Provide complete mixer / frequency converter amplitude response, absolute phase and absolute delay response measurement ability, a single connection can complete the mixer / frequency converter complex characteristic measurement, high amplitude and phase measurement accuracy.

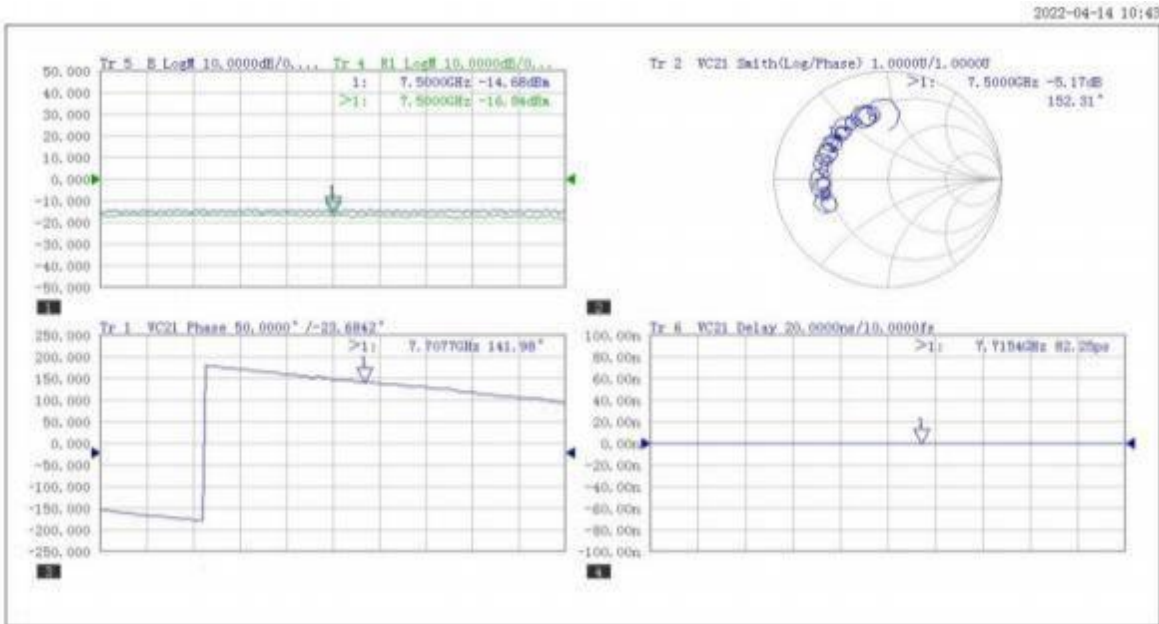

Characterization of Mixer / Converter Characteristics


The vector measurement analysis of mixer / Converter can complete the characterization of the mixer, which is used to determine the characteristics of the mixer and obtain the characteristics of the Converter.

The feature characterization function serves as an independent function, and the generated mixer characterization data files can be automatically called in the vector measurement analysis.

Gain Compression Measurement

Single connection, quickly complete the amplifier gain compression parameter test

The gain compression measurement function completes the measurement of the linear gain, compression point gain, input power, output power, and linear input matching in the active device through one connection and one calibration.

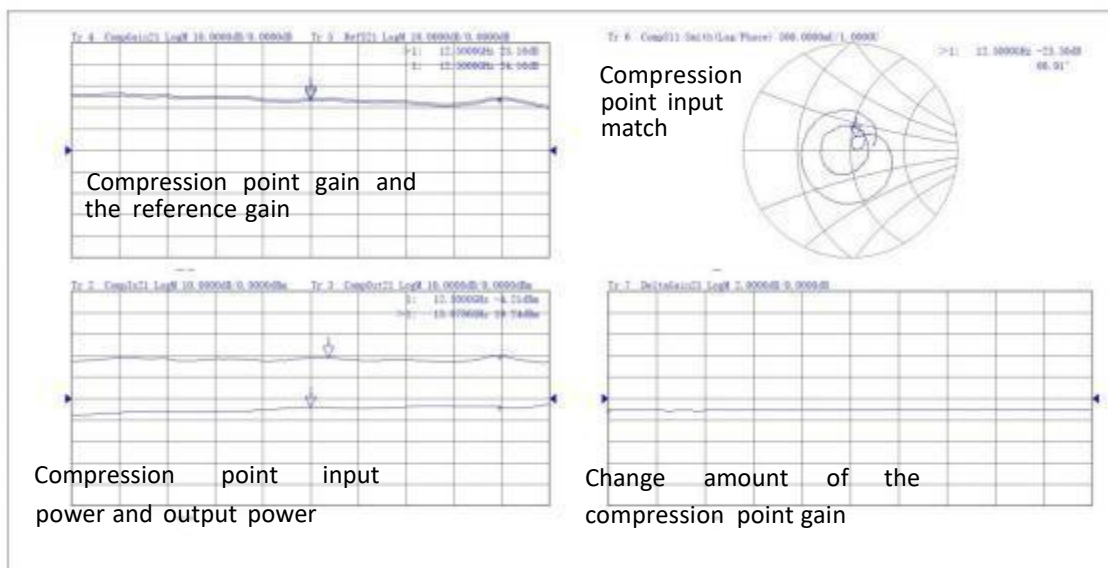

Power calibration, guide calibration to obtain high precision measurement


Power calibration and receiver calibration can obtain accurate compression point input power and output power values. The exact gain measurement and input / output matching values can be obtained.

Various scanning methods and compression methods should deal with different measurement scenarios


Intelligent scanning can quickly and accurately get compression points, provide the power scanning of each frequency point and the frequency scanning mode of each power point, obtain complete measurement data, provide from linear gain compression, from the maximum gain compression, from the fallback point compression, X/Y compression, saturated state compression, users can choose different compression methods according to the type of test and different measurement scenarios.

3D view drawing, visually show the characteristics of the tested parts


Provide 3D view function to better show the performance of the tested device under the excitation state; it can also show the frequency profile and power profile to visually show the characteristics of the measured device at each frequency point and each power point.

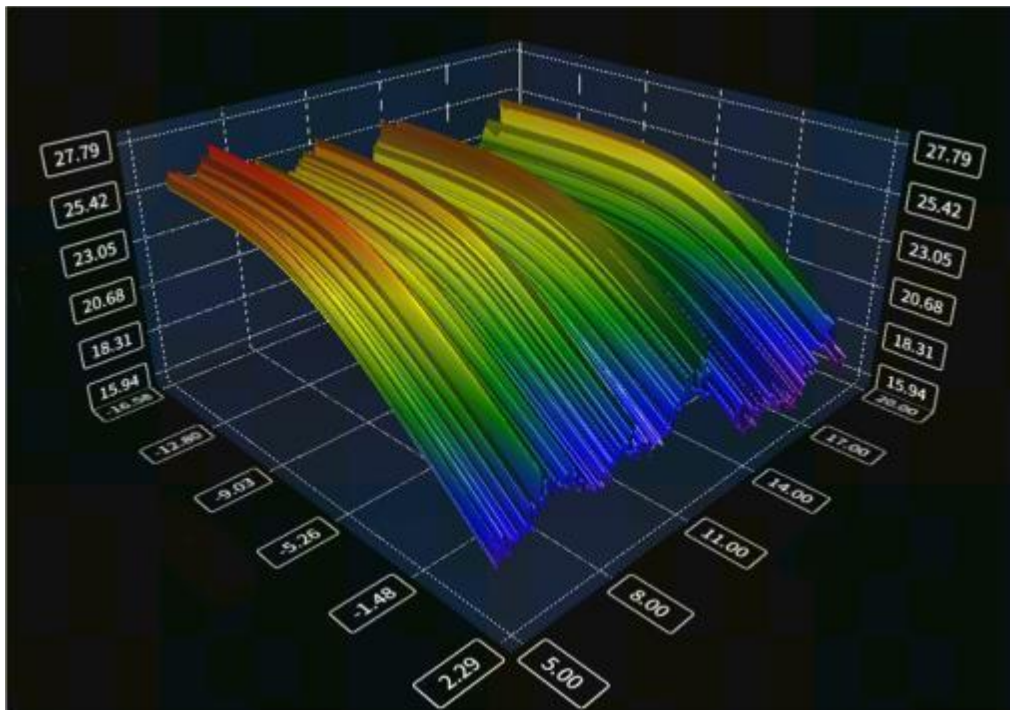

3-D View

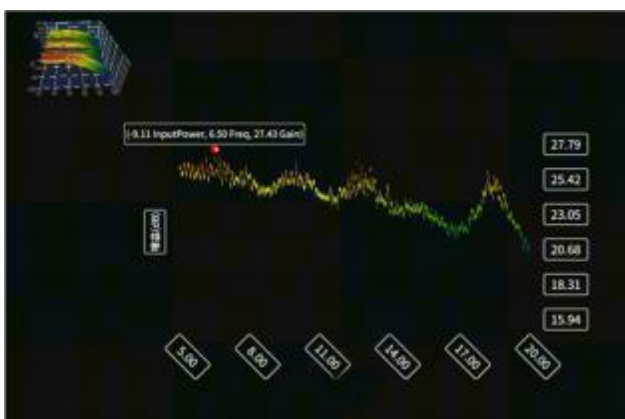

Power section

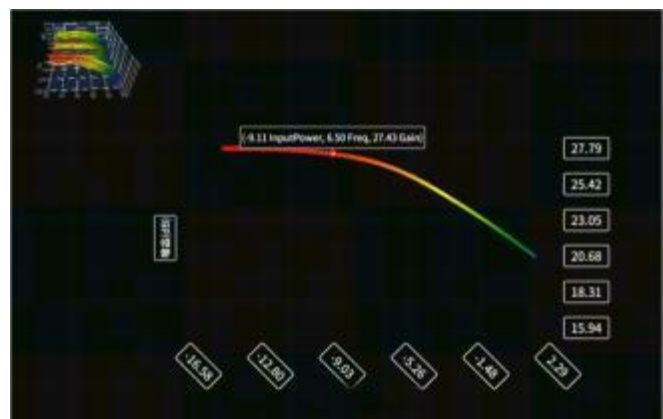

Frequency section


Noise Figure Measurement

Fast, accurate NF measurement with large dynamic range

Primary connection can simultaneously test S parameters, noise coefficient, noise parameters, gain compression and frequency conversion gain. Based on the cold source noise coefficient test method, the accurate noise coefficient and noise parameter test can be conducted. By constructing the advanced noise correlation matrix model and combining with the precise S parameter calibration of the vector network analyzer, it is suitable for the accurate test of the measured parts with the lower noise coefficient. The measurement dynamic range can reach 55dB, which is suitable for testing of subjects with large gain.

Analysis of the noise coefficient test of non-standard interface devices such as microwave chip

Based on the patented noise embedding / deembedding technology, the noise coefficient test of non-standard interface devices is realized. In particular, it can solve the problem of microwave chip noise coefficient in the chip test, and eliminate the impact of the mismatch between the tested parts and the test equipment.

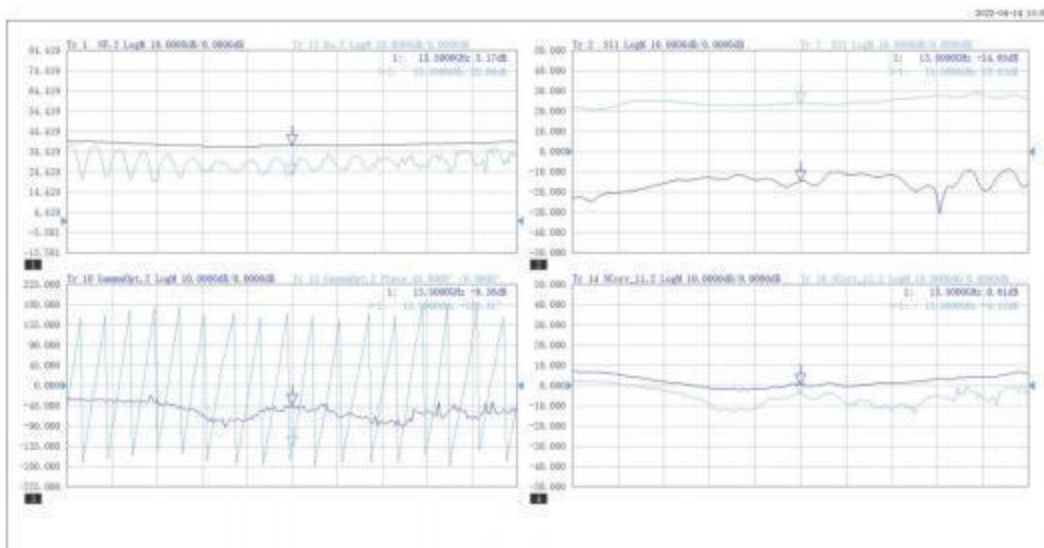

Test and analysis of the noise parameters

The noise coefficient and the noise parameters can be tested simultaneously, including the amplitude and phase of the minimum noise coefficient, the noise internal resistance and the optimal reflection coefficient.

The influence of noise parameters can be eliminated by the modification of noise power receiver.

Spectrum Analysis Measurement

Rapid search of multiport stray spectra and harmonics


Each port of the vector network analyzer can complete the measurement of the input and output spectrum of the measured spectrum, and the spectrum measurement technology based on fast Fourier transform can quickly locate the state of the stray spectrum and harmonic of the measured spectrum at a small resolution bandwidth.

Single connection using single instrument completes the multi-parameter evaluation of the Device Under Test

For the test of active devices, the spectrum measurement function can provide more measurement parameters, a single instrument can realize the conventional S parameter test, stray and harmonic positioning measurement; complete ratio and absolute measurement error correction technology can provide more accurate measurement results.

Efficient marker measurement function

The marker of spectrum measurement function can provide in-band power, power spectral density, occupied bandwidth, adjacent power ratio and other indicators, and one-click setting and real-time update.

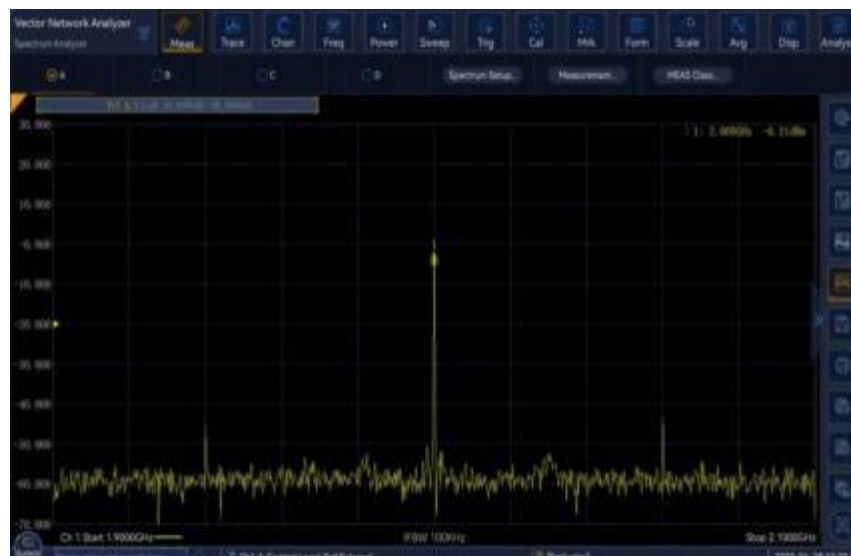

Analysis and measurements of the signal integrity

Ultra-broadband coverage enables time-domain analysis with micron-scale resolution

Powerful signal integrity measurement and analysis ability, can provide micron level spatial resolution, for small size chip packaging test, to solve the problem of positioning discontinuity.


Test analysis of the signal integrity in a single view

A single view completes both time domain and frequency domain test analysis, helping the user to find the source of impedance discontinuity, reflection and crosstalk. It can accurately measure the impedance characteristics of transmission lines; convenient proximal and remote crosstalk tests to test the degree of interaction between multiple transmission lines.

Simulated eye diagram for rapid analysis of signal integrity

S3674 series VNA has the function of virtual eye map generation and analysis based on network parameters. Depending on the different high-speed digital communication standards, high-efficiency Pass / Fail tests can be performed using pre-defined eye-map templates.

Jitter, noise and other interference can be applied to the simulated eye map, and the simulated eye map of different positions in the high-speed link can be simulated through the addition of correction algorithms such as pre-aggravation and equilibrium.

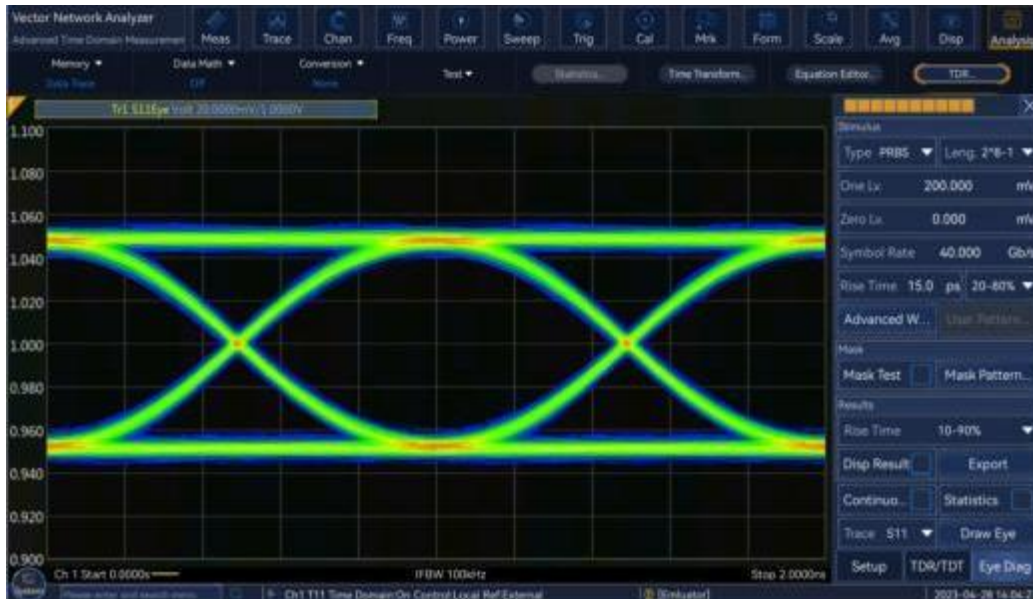

Analysis of the total harmonic distortion (THD) measurement

Test analysis of multiple harmonics of a wide-band coverage differential amplifier

Broadband test can be used for the measurement and analysis of input and output power, gain, harmonic total distortion and other parameters under true differential excitation, and simplify the harmonic performance test complexity of differential active devices with as amplifier.


Single calibration simultaneously completes the multi-channel error correction

A single calibration can simultaneously complete the multi-channel error correction of the standard S parameter and the total harmonic distortion, that is, the ratio measurement error, the absolute receiver measurement error, and the error correction of the port excitation power. The transmission and mismatch errors introduced by different mechanical attenuation

files between the channels can also be compensated by a single calibration.

Convenient and efficient setting mode of measurement parameters

The editing of setting the measurement parameters can be completed by XML file. The parameters can be imported with one key, and the imported measurement parameters can be updated to the parameter selection interface in real time.

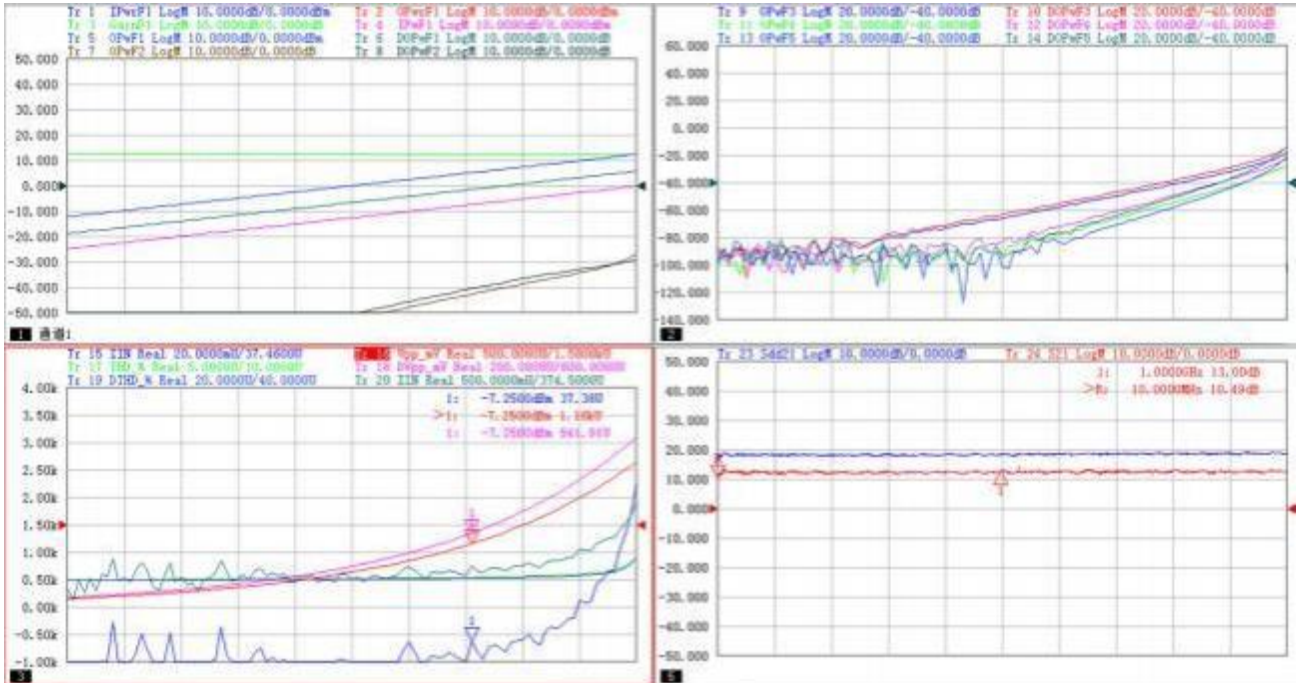

Differential I/Q Measurements

Wideband coverage for testing and analysis of differential and I/Q devices

Wideband testing supports dual-source and receiver operation in various phase, power, and frequency combinations, providing 20 customizable frequency ranges. This allows for measurement and analysis of parameters such as input and output power, gain, harmonic distortion, and local oscillator leakage under true differential excitation, simplifying testing of various devices such as differential amplifiers and I/Q mixers in complex scenarios.

Full-Channel Calibration with Port Matching

A single calibration allows simultaneous error correction for multiple channels, including standard S-parameters and differential I/Q measurements. The source and receiver calibration function with port mismatch ensures the accuracy of dual-source output power and phase, enabling more accurate and efficient measurements.

Convenient and efficient custom measurement parameter settings


User can define measurement parameters for up to eight receiver and frequency combinations. Edit measurement parameters via XML files and import them with one click. These imported parameters are updated in real time on the parameter selection screen.

Automatic Fixture Removal

Solve the test problem of non-standard joint devices


For non-standard connector devices testing, such as packaging microwave devices, in-chip devices, such devices cannot be directly connected to the vector network analyzer. The

fixture is usually used to connect the measured piece to a vector network analyzer, but the fixture also introduces measurement error. The automatic fixture removal function can extract, store the fixture parameters and embed the fixture, and finally obtain the real parameters of the measured parts.

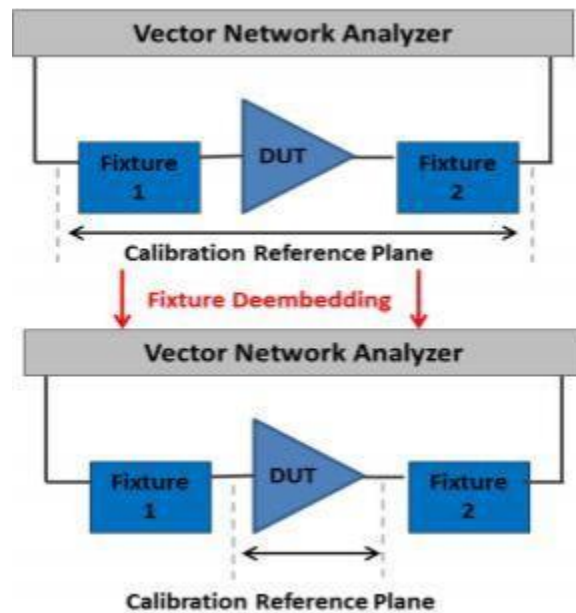


Simple operation and high error correction accuracy


Automatic fixture removal function has the advantages of easy operation and high precision. This feature does not require custom calibration, eliminates proximal and distal crosstalk of the differential fixture, and is suitable for test scenarios with open circuit at one end of the fixture.

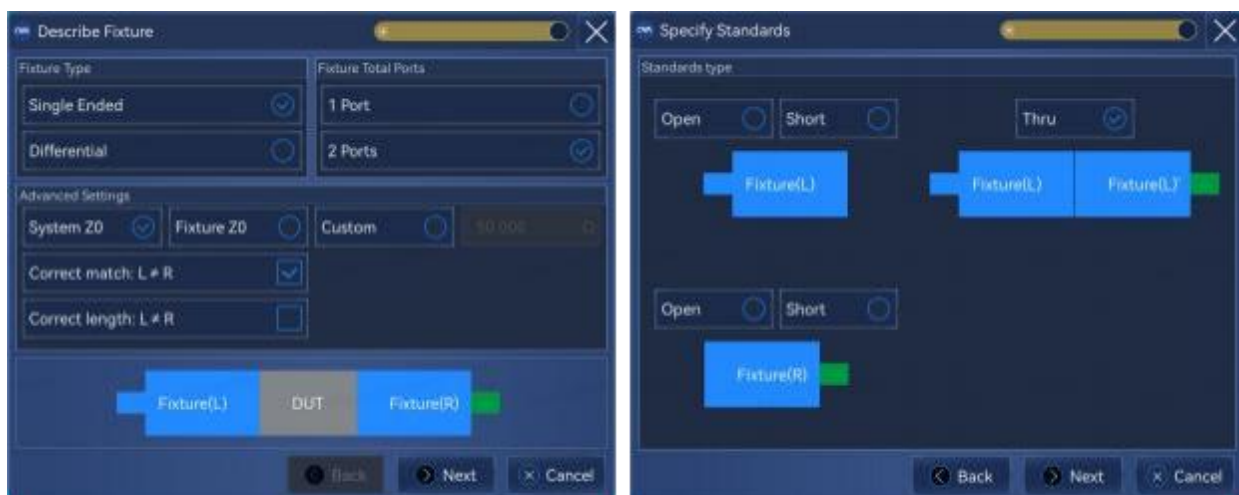

Using the automatic fixture removal function, the measured parts, balance parameter extraction and four-port embedding. It can effectively remove the transmission parameters, proximal crosstalk, and remote crosstalk.

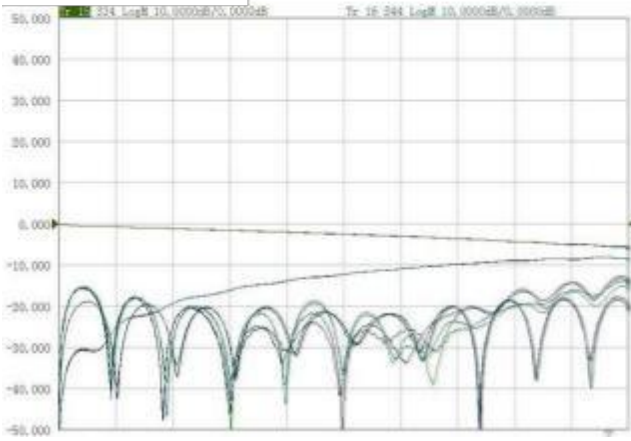

Before Fixture Deembedding

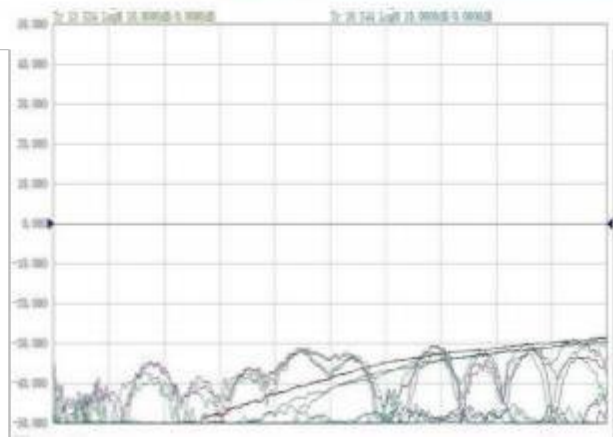

After Fixture Deembedding

Excellent User Experience

Simple and intuitive UI, easy to operate with improved test efficiency

15.6-inch HD screen
2K resolution
Multi-touch control

Personalize the display area. Hundreds of measurement windows can be displayed

Toolbar has many common functions, convenient and quick operation

The SPC1 command is recording Dedicated to automatic testing and development, save 30% workload

search function: quick location of strange functions
Realize convenient interaction

Two / 4 ports are optional
Flexible configuration test device

Simple interface stick out a mile
The USB 3.0 interface burst transmission

Rich peripheral interfaces, flexible and practical



1 - 10 MHz external reference input / output interface

2- 110V / 220VAC power supply input

3-Detachable CPU module, configured with hard disk, LAN, DP, USB, and GPIB interfaces

4-excitation output and local vibration output provide flexible measurement configuration

5-External and intermediate frequency input interface, pulse input and output interface

6-Bias Tees configuration input interface

7-Automatic test interface, trigger input / output interface, noise source power interface

Technical Specifications

S3674B/C/D/E Technical Specifications

Items	Specifications	Typical
Frequency Characteristic		
Frequency Range	10MHz to 9 GHz / 14 GHz /20 GHz /26.5 GHz	
Frequency Resolution	0.1Hz	
Frequency Accuracy	$\pm 1 \times 10^{-7}$ (23°C \pm 3°C)	
Port Harmonic Suppression		Typical
Port 1,3 Harmonic Suppression	-48dBc (0.01 ~ 4GHz)	-62dBc (0.01 ~ 4GHz)
	-57dBc (4 ~ 14GHz)	-68dBc (4 ~ 14GHz)
	-57dBc (14 ~ 26.5GHz)	-70dBc (14 ~ 26.5GHz)
Port 2,4 Harmonic Suppression	-13dBc (0.01 ~ 4GHz)	-24dBc (0.01 ~ 4GHz)
	-18dBc (4 ~ 14GHz)	-30dBc (4 ~ 14GHz)
	-18dBc (14 ~ 26.5GHz)	-36dBc (14 ~ 26.5GHz)
Port Power Characteristics		Typical
Power Sweep Range	33dB (10 ~ 50MHz)	36dB (10 ~ 50MHz)
	35dB (0.05 ~ 4GHz)	39dB (0.05 ~ 4GHz)
	38dB (4 ~ 16GHz)	41dB (4 ~ 16GHz)
	35dB (16 ~ 20GHz)	40dB (16 ~ 20GHz)
	32dB (20 ~ 24GHz)	39dB (20 ~ 24GHz)
	27dB (24 ~ 26.5GHz)	38dB (24 ~ 26.5GHz)
Max. Output Power (Standard Configuration, Option 400)	+13dBm(10MHz~50MHz)	+16dBm(10MHz~50MHz)
	+13dBm(0.05GHz~14GHz)	+15dBm(0.05GHz~14GHz)
	+13dBm (14GHz~20GHz)	+15dBm (14GHz~20GHz)
	+10dBm (24GHz~26.5GHz)	+14dBm (24GHz~26.5GHz)
Max. Output Power (400+401+402+404+003 options)	+10dBm (10MHz~50MHz)	+12dBm (10MHz~50MHz)
	+7dBm (0.05GHz~14GHz)	+10dBm(0.05GHz~14GHz)
	+5dBm (14GHz~20GHz)	+10dBm (14GHz~20GHz)
	+3dBm (24GHz~26.5GHz)	+7dBm (24GHz~26.5GHz)
Pulse Characteristic		Typical
Pulse Width Setting Range	33ns ~ 70s	20ns ~ 70s
Pulse ON/OFF Ratio	64dB (0.01 ~ 4GHz)	
	80dB (4 ~ 26.5GHz)	
Network Parameter Characteristic		Typical
System Dynamic Range (Standard, Option 400)	96dB (10MHz ~ 50MHz)	108dB (10MHz ~ 50MHz)
	110dB (50MHz ~ 500MHz)	124dB (50MHz ~ 500MHz)
	130dB (0.5GHz ~ 4GHz)	140dB (0.5GHz ~ 4GHz)
	133dB (4GHz ~ 14GHz)	140dB (4GHz ~ 14GHz)
	131dB (14GHz ~ 20GHz)	133dB (14GHz ~ 20GHz)
	125dB (20GHz ~ 26.5GHz)	128dB (20GHz ~ 26.5GHz)
System dynamic range (400+401+402+404+003 options)	96dB (10MHz ~ 50MHz)	105dB (10MHz ~ 50MHz)
	110dB (50MHz ~ 500MHz)	120dB (50MHz ~ 500MHz)
	120dB (0.5GHz ~ 4GHz)	134dB (0.5GHz ~ 4GHz)
	120dB (4GHz ~ 14GHz)	134dB (4GHz ~ 14GHz)
	115dB (14GHz ~ 20GHz)	128dB (14GHz ~ 20GHz)
	115dB (20GHz ~ 26.5GHz)	122dB (20GHz ~ 26.5GHz)
Effective Directivity	48dB (0.01 ~ 2GHz)	65dB (0.01 ~ 2GHz)
	44dB (2 ~ 26.5GHz)	52dB (2 ~ 26.5GHz)
Effective Source Match	40dB (0.01 ~ 2GHz)	46dB (0.01 ~ 2GHz)
	31dB (2 ~ 26.5GHz)	36dB (2 ~ 26.5GHz)
Effective Load Match	47dB (0.01 ~ 2GHz)	61dB (0.01 ~ 2GHz)

	44dB (2 ~ 26.5GHz)	56dB (2 ~ 26.5GHz)
Reflection Tracking	±0.0150dB (0.01 ~ 2GHz) ±0.0161dB (2 ~ 26.5GHz)	±0.0060dB (0.01 ~ 2GHz) ±0.0030dB (2 ~ 26.5GHz)
Transmission Tracking	±0.044dB (10 ~ 50MHz) ±0.055dB (0.05 ~ 2GHz) ±0.120dB (2 ~ 9GHz) ±0.110dB (9 ~ 14GHz) ±0.120dB (14 ~ 26.5GHz)	±0.001dB (10 ~ 50MHz) ±0.002dB (0.05 ~ 2GHz) ±0.004dB (2 ~ 9GHz) ±0.005dB (9 ~ 14GHz) ±0.008dB (14 ~ 26.5GHz)
Others	Typical	
Amplitude Trace Noise dB rms (1 kHz IF bandwidth)	0.0070 (10 ~ 100MHz) 0.0020 (100 ~ 500MHz) 0.0020 (0.5 ~ 1GHz) 0.0020 (1 ~ 14GHz) 0.0020 (14 ~ 22.5GHz) 0.0030 (22.5 ~ 24GHz) 0.0050 (24 ~ 26.5GHz)	0.0040 (10 ~ 100MHz) 0.0017 (100 ~ 500MHz) 0.0006 (0.5 ~ 1GHz) 0.0006 (1 ~ 14GHz) 0.0007 (14 ~ 22.5GHz) 0.0008 (22.5 ~ 24GHz) 0.0007 (24 ~ 26.5GHz)
Phase Trace Noise Deg rms (1 kHz IF bandwidth)	0.051 (10 ~ 100MHz) 0.015 (100 ~ 500MHz) 0.015 (0.5 ~ 1GHz) 0.015 (1 ~ 14GHz) 0.042 (14 ~ 22.5GHz) 0.054 (22.5 ~ 24GHz) 0.054 (24 ~ 26.5GHz)	0.030 (10 ~ 100MHz) 0.012 (100 ~ 500MHz) 0.004 (0.5 ~ 1GHz) 0.004 (1 ~ 14GHz) 0.005 (14 ~ 22.5GHz) 0.005 (22.5 ~ 24GHz) 0.005 (24 ~ 26.5GHz)
IF Bandwidth	1 Hz ~ 30 MHz	
Amplitude Display resolution	0.001 dB/div	
Phase Display Resolution	0.001°/div	
General Characteristic		
Port Connectors Type	3.5mm (male), system impedance 50 ohms	
Number of Ports	S3674B / C / D / E standard: 2-port S3674B / C / D / E-400 option: 4-port	
Peripheral Interface	GPIB interface, USB interface, DP interface, LAN interface	
Display	15.6-inch high-resolution touch display	
Dimensions	Overall dimensions (W*H*D, including handles, feet and pads): 2-port: 475mm * 279mm * 560mm 4-port: 475mm * 279mm * 660mm	
Max. Power Consumption	500 W	
Power Supply	50Hz 220V or 50Hz/60Hz 110VAC	
Max. Weight	50 kg	

S3674F/G/H Technical Specification

Items	Specifications	Typical
Frequency Characteristic		
Frequency Range	10MHz ~ 32GHz/44GHz/50GHz	
Frequency Resolution	0.1Hz	
Frequency Accuracy	±1×10 ⁻⁷ (23°C±3°C)	
Port Harmonic Suppression		
	Typical	
Port 1,3 Harmonic Suppression	-48dBc (0.01 ~ 4GHz) -57dBc (4 ~ 14GHz) -57dBc (14 ~ 50GHz)	-68dBc (0.01 ~ 4GHz) -70dBc (4 ~ 14GHz) -70dBc (14 ~ 50GHz)
Port 2,4 Harmonic Suppression	-13dBc (0.01 ~ 4GHz) -18dBc (4 ~ 14GHz) -57dBc (14 ~ 50GHz)	-18dBc (0.01 ~ 4GHz) -31dBc (4 ~ 14GHz) -70dBc (14 ~ 50GHz)
Port Power Characteristics		
	Typical	
Power Sweep Range	37dB (10 ~ 50MHz) 38dB (0.05 ~ 2GHz) 35dB (2 ~ 4GHz) 38dB (4 ~ 26.5GHz) 37dB (26.5 ~ 30GHz) 36dB (30 ~ 32GHz) 37dB (32 ~ 35GHz) 34dB (35 ~ 44GHz)	42dB (10 ~ 50MHz) 44dB (0.05 ~ 2GHz) 41dB (2 ~ 4GHz) 41dB (4 ~ 26.5GHz) 42dB (26.5 ~ 30GHz) 40dB (30 ~ 32GHz) 43dB (32 ~ 35GHz) 39dB (35 ~ 44GHz)

	30dB (44 ~ 47GHz) 20dB (47 ~ 50GHz)	38dB (44 ~ 47GHz) 36dB (47 ~ 50GHz)
Max. Output Power (Standard Configuration, Option 400)	+12 dBm (10~50 MHz) +12 dBm (0.05~4GHz) +12dBm (4 ~ 14GHz) +13dBm (14 ~ 20GHz) +13dBm (20 ~ 26.5GHz) +12dBm (26.5 ~ 40GHz) +9dBm (40 ~ 47GHz) +5dBm (47 ~ 50GHz)	+14 dBm (10~50 MHz) +13 dBm (0.05~4GHz) +14dBm (4 ~ 14GHz) +14dBm (14 ~ 20GHz) +14dBm (20 ~ 26.5GHz) +15dBm (26.5 ~ 40GHz) +13dBm (40 ~ 47GHz) +10dBm (47 ~ 50GHz)
Max. Output Power (400+401+402+404+003 options)	+9 dBm (10~50 MHz) +4 dBm (0.05~4GHz) +4dBm (4 ~ 14GHz) +8dBm (14 ~ 20GHz) +6dBm (20 ~ 26.5GHz) +4dBm (26.5 ~ 40GHz) -1dBm (40 ~ 47GHz) -5dBm (47 ~ 50GHz)	+10 dBm (10~50 MHz) +7 dBm (0.05~4GHz) +7dBm (4 ~ 14GHz) +9dBm (14 ~ 20GHz) +9dBm (20 ~ 26.5GHz) +7dBm (26.5 ~ 40GHz) +1dBm (40 ~ 47GHz) +0dBm (47 ~ 50GHz)
Pulse Characteristic Typical		
Pulse Width Setting Range	33ns ~ 70s	20ns ~ 70s
Pulse ON/OFF Ratio	64dB (0.01 ~ 4GHz) 80dB (4 ~ 50GHz)	
Network Parameter Characteristic Typical		
System Dynamic Range (Standard, Option 400)	89dB (10 ~ 50MHz) 106dB (50 ~ 500MHz) 130dB (0.5 ~ 4GHz) 130dB (4 ~ 14GHz) 128dB (14 ~ 20GHz) 130dB (20 ~ 26.5GHz) 125dB (26.5 ~ 40GHz) 122dB (40 ~ 47GHz) 115dB (47 ~ 50GHz)	104dB (10 ~ 50MHz) 122dB (50 ~ 500MHz) 137dB (0.5 ~ 4GHz) 139dB (4 ~ 14GHz) 138dB (14 ~ 20GHz) 138dB (20 ~ 26.5GHz) 133dB (26.5 ~ 40GHz) 130dB (40 ~ 47GHz) 125dB (47 ~ 50GHz)
System dynamic range (400+401+402+404+003 options)	83dB (10 ~ 50MHz) 100dB (50 ~ 500MHz) 114dB (0.5 ~ 4GHz) 112dB (4 ~ 14GHz) 116dB (14 ~ 20GHz) 114dB (20 ~ 26.5GHz) 112dB (26.5 ~ 40GHz) 106dB (40 ~ 47GHz) 100dB (47 ~ 50GHz)	97dB (10 ~ 50MHz) 108dB (50 ~ 500MHz) 125dB (0.5 ~ 4GHz) 132dB (4 ~ 14GHz) 128dB (14 ~ 20GHz) 127dB (20 ~ 26.5GHz) 125dB (26.5 ~ 40GHz) 119dB (40 ~ 47GHz) 104dB (47 ~ 50GHz)
Effective Directivity	41dB (0.01 ~ 2GHz) 38dB (2 ~ 20GHz) 36dB (20 ~ 50GHz)	59dB (0.01 ~ 2GHz) 54dB (2 ~ 20GHz) 47dB (20 ~ 50GHz)
Effective Source Match	31dB (0.01 ~ 2GHz) 30dB (2 ~ 20GHz) 23dB (20 ~ 50GHz)	45dB (0.01 ~ 2GHz) 36dB (2 ~ 20GHz) 31dB (20 ~ 50GHz)
Effective Load Match	42dB (0.01 ~ 2GHz) 37dB (2 ~ 20GHz) 35dB (20 ~ 50GHz)	58dB (0.01 ~ 2GHz) 55dB (2 ~ 20GHz) 51dB (20 ~ 50GHz)
Reflection Tracking	±0.0150dB (0.01 ~ 2GHz) ±0.0290dB (2 ~ 20GHz) ±0.0300dB (20 ~ 40GHz) ±0.0400dB (40 ~ 50GHz)	±0.0046dB (0.01 ~ 2GHz) ±0.0022dB (2 ~ 20GHz) ±0.0020dB (20 ~ 40GHz) ±0.0065dB (40 ~ 50GHz)
Transmission Tracking	±0.051dB (10 ~ 50MHz) ±0.030dB (0.05 ~ 2GHz) ±0.095dB (2 ~ 10GHz) ±0.120dB (10 ~ 20GHz) ±0.200dB (20 ~ 40GHz) ±0.200dB (40 ~ 50GHz)	±0.002dB (10 ~ 50MHz) ±0.004dB (0.05 ~ 2GHz) ±0.002dB (2 ~ 10GHz) ±0.002dB (10 ~ 20GHz) ±0.005dB (20 ~ 40GHz) ±0.002dB (40 ~ 50GHz)
Others Typical		
Amplitude Trace Noise dB rms (1 kHz IF bandwidth)	0.2000 (10 ~ 50MHz) 0.0200 (50 ~ 500MHz) 0.0030 (0.5 ~ 1GHz) 0.0020 (1 ~ 26.5GHz) 0.0030 (26.5 ~ 44GHz) 0.0040 (44 ~ 50GHz)	0.0039 (10 ~ 50MHz) 0.0006 (50 ~ 500MHz) 0.0005 (0.5 ~ 1GHz) 0.0006 (1 ~ 26.5GHz) 0.0007 (26.5 ~ 44GHz) 0.0008 (44 ~ 50GHz)
Phase Trace Noise Deg rms (1 kHz IF bandwidth)	1.000 (10 ~ 50MHz) 0.500 (50 ~ 500MHz) 0.020 (0.5 ~ 1GHz) 0.020 (1 ~ 26.5GHz) 0.030 (26.5 ~ 50GHz)	0.024 (10 ~ 50MHz) 0.004 (50 ~ 500MHz) 0.003 (0.5 ~ 1GHz) 0.004 (1 ~ 26.5GHz) 0.005 (26.5 ~ 50GHz)
IF Bandwidth	1Hz ~ 30M Hz	



Amplitude Display resolution	0.001dB /div
Phase Display Resolution	0.001°/div
General Characteristic	
Port Connectors	2.4mm (head), system impedance 50 ohms
Number of Measured Ports	S3674F / G / H standard standard: 2-port; S3674F / G / H-400 option: 4-port
Peripheral Interface	GPIB interface, USB interface, DP interface, LAN interface
Display	15.6-inch high-resolution touch screen
Dimensions	Overall dimensions (W*H*D, including handles, feet and pads): 2-port: 475mm *279mm *560mm 4-port: 475mm *279mm *660mm
Max. Power Consumption	500W
Power Supply	50Hz single-phase 220V or 50Hz / 60Hz single-phase 110V AC
Max. Weight	50kg

S3674K/ L Technical Specification

Frequency Characteristic		
Frequency Range	10M Hz ~ 53/67GHz	
Frequency Resolution	0.1Hz	
Frequency Accuracy	$\pm 1 \times 10^{-7}$ (23°C \pm 3°C)	
Port Harmonic Suppression		Typical
Port 1,3 Harmonic Suppression	-48dBc (0.01 ~ 4GHz) -57dBc (4 ~ 14GHz) -57dBc (14 ~ 67GHz)	-57dBc (0.01 ~ 4GHz) -70dBc (4 ~ 14GHz) -71dBc (14 ~ 67GHz)
Port 2,4 Harmonic Suppression	-13dBc (0.01 ~ 4GHz) -18dBc (4 ~ 14GHz) -57dBc (14 ~ 67GHz)	-25dBc (0.01 ~ 4GHz) -32dBc (4 ~ 14GHz) -72dBc (14 ~ 67GHz)
Port Power Characteristics		Typical
Power Sweep Range	35dB (10 ~ 50MHz)	41dB (10 ~ 50MHz)
	38dB (0.05 ~ 2GHz)	44dB (0.05 ~ 2GHz)
	35dB (2 ~ 4GHz)	40dB (2 ~ 4GHz)
	38dB (4 ~ 10GHz)	42dB (4 ~ 10GHz)
	36dB (10 ~ 14GHz)	43dB (10 ~ 14GHz)
	37dB (14 ~ 16GHz)	42dB (14 ~ 16GHz)
	35dB (16 ~ 19GHz)	40dB (16 ~ 19GHz)
	34dB (19 ~ 26.5GHz)	37dB (19 ~ 26.5GHz)
	33dB (26.5 ~ 30GHz)	37dB (26.5 ~ 30GHz)
	32dB (30 ~ 32GHz)	36dB (30 ~ 32GHz)
	32dB (32 ~ 35GHz)	39dB (32 ~ 35GHz)
	30dB (35 ~ 40GHz)	36dB (35 ~ 40GHz)
35dB (40 ~ 67GHz)	40dB (40 ~ 67GHz)	
Max. Output Power (Standard Configuration, Option 400)	+10 dBm (10-50 MHz)	+16 dBm (10-50 MHz)
	+ 10 dBm (0.05~14GHz)	+14 dBm (0.05~14GHz)
	+12dBm (14 ~ 20GHz)	+16dBm (14 ~ 20GHz)
	+11dBm (20~26.5GHz)	+14dBm (20~26.5GHz)
	+10dBm (26.5 ~ 30GHz)	+13dBm (26.5 ~ 30GHz)
	+7dBm (30 ~ 32GHz)	+10dBm (30 ~ 32GHz)
	+9dBm (32 ~ 35GHz)	+12dBm (32 ~ 35GHz)
	+5dBm (35 ~ 40GHz)	+11dBm (35 ~ 40GHz)
+10dBm (40 ~ 67GHz)	+16dBm (40 ~ 67GHz)	
Max. Output Power (400+401+402+404+003 options)	+6 dBm (10-50 MHz)	+10 dBm (10-50 MHz)
	+ 4 dBm (0.05~14GHz)	+9 dBm (0.05~14GHz)
	+4dBm (14 ~ 20GHz)	+11dBm (14 ~ 20GHz)
	+4dBm (20~26.5GHz)	+7dBm (20 ~ 26.5GHz)
	-2dBm (26.5 ~ 30GHz)	+6dBm (26.5 ~ 30GHz)
	-2dBm (30 ~ 32GHz)	+4dBm (30 ~ 32GHz)
	-2dBm (32 ~ 35GHz)	+5dBm (32 ~ 35GHz)
	-2dBm (35 ~ 40GHz)	+3dBm (35 ~ 40GHz)
-2dBm (40 ~ 67GHz)	+4dBm (40 ~ 67GHz)	
Pulse Characteristic		Typical
Pulse Width Setting Range	33ns ~ 70s	20ns ~ 70s
Pulse ON/OFF Ratio	64dB (0.01 ~ 4GHz) 80dB (4 ~ 67GHz)	
Network Parameter Characteristic		Typical
System Dynamic Range (Standard, Option 400)	87dB (10 ~ 50MHz)	102dB (10 ~ 50MHz)
	110dB (50 ~ 500MHz)	124dB (50 ~ 500MHz)
	127dB (0.5 ~ 4GHz)	137dB (0.5 ~ 4GHz)
	130dB (4 ~ 14GHz)	142dB (4 ~ 14GHz)

	129dB (14 ~ 26.5GHz) 120dB (26.5 ~ 40GHz) 116dB (40 ~ 50GHz) 107dB (50 ~ 60GHz) 106dB (60 ~ 67GHz)	138dB (14 ~ 26.5GHz) 134dB (26.5 ~ 40GHz) 128dB (40 ~ 50GHz) 118dB (50 ~ 60GHz) 116dB (60 ~ 67GHz)
System dynamic range (400+401+402+404+003 options)	84dB (10 ~ 50MHz) 101dB (50 ~ 500MHz) 114dB (0.5 ~ 4GHz) 113dB (4 ~ 14GHz) 113dB (14 ~ 26.5GHz) 105dB (26.5 ~ 40GHz) 106dB (40 ~ 50GHz) 101dB (50 ~ 60GHz) 100dB (60 ~ 67GHz)	100dB (10 ~ 50MHz) 120dB (50 ~ 500MHz) 129dB (0.5 ~ 4GHz) 130dB (4 ~ 14GHz) 128dB (14 ~ 26.5GHz) 118dB (26.5 ~ 40GHz) 115dB (40 ~ 50GHz) 112dB (50 ~ 60GHz) 106dB (60 ~ 67GHz)
Effective Directivity	35dB (0.01 ~ 2GHz) 41dB (2 ~ 10GHz) 38dB (10 ~ 20GHz) 37dB (20 ~ 35GHz) 37dB (35 ~ 50GHz) 34dB (50 ~ 67GHz)	65dB (0.01 ~ 2GHz) 65dB (2 ~ 10GHz) 59dB (10 ~ 20GHz) 54dB (20 ~ 35GHz) 48dB (35 ~ 50GHz) 40dB (50 ~ 67GHz)
Effective Source Match	34dB (0.01 ~ 2GHz) 36dB (2 ~ 10GHz) 40dB (10 ~ 20GHz) 34dB (20 ~ 35GHz) 28dB (35 ~ 50GHz) 28dB (50 ~ 67GHz)	43dB (0.01 ~ 2GHz) 40dB (2 ~ 10GHz) 42dB (10 ~ 20GHz) 38dB (20 ~ 35GHz) 31dB (35 ~ 50GHz) 31dB (50 ~ 67GHz)
Effective Load Match	34dB (0.01 ~ 2GHz) 40dB (2 ~ 10GHz) 36dB (10 ~ 20GHz) 35dB (20 ~ 35GHz) 36dB (35 ~ 50GHz) 33dB (50 ~ 67GHz)	59dB (0.01 ~ 2GHz) 66dB (2 ~ 10GHz) 66dB (10 ~ 20GHz) 57dB (20 ~ 35GHz) 59dB (35 ~ 50GHz) 55dB (50 ~ 67GHz)
Reflection Tracking	±0.0200dB (0.01 ~ 2GHz) ±0.0110dB (2 ~ 10GHz) ±0.0330dB (10 ~ 35GHz) ±0.0200dB (35 ~ 50GHz) ±0.0310dB (50 ~ 67GHz)	±0.0050dB (0.01 ~ 2GHz) ±0.0016dB (2 ~ 10GHz) ±0.0037dB (10 ~ 35GHz) ±0.0045dB (35 ~ 50GHz) ±0.0180dB (50 ~ 67GHz)
Transmission Tracking	±0.100dB (0.01 ~ 2GHz) ±0.065dB (2 ~ 10GHz) ±0.100dB (10 ~ 20GHz) ±0.110dB (20 ~ 35GHz) ±0.094dB (35 ~ 50GHz) ±0.140dB (50 ~ 60GHz) ±0.150dB (60 ~ 67GHz)	±0.002dB (0.01 ~ 2GHz) ±0.002dB (2 ~ 10GHz) ±0.002dB (10 ~ 20GHz) ±0.003dB (20 ~ 35GHz) ±0.004dB (35 ~ 50GHz) ±0.006dB (50 ~ 60GHz) ±0.009dB (60 ~ 67GHz)
Others		
		Typical
Amplitude Trace Noise dB rms (1 kHz IF bandwidth)	0.0500 (10 ~ 50MHz) 0.0040 (50 ~ 100MHz) 0.0020 (100 ~ 500MHz) 0.0030 (0.5 ~ 1GHz) 0.0020 (1 ~ 26.5GHz) 0.0030 (26.5 ~ 50GHz) 0.0300 (50 ~ 67GHz)	0.0042 (10 ~ 50MHz) 0.0030 (50 ~ 100MHz) 0.0006 (100 ~ 500MHz) 0.0004 (0.5 ~ 1GHz) 0.0003 (1 ~ 26.5GHz) 0.0009 (26.5 ~ 50GHz) 0.0077 (50 ~ 67GHz)
Phase Trace Noise Deg rms (1 kHz IF bandwidth)	0.400 (10 ~ 50MHz) 0.020 (0.05 ~ 26.5GHz) 0.030 (26.5 ~ 50GHz) 0.200 (50 ~ 67GHz)	0.029 (10 ~ 50MHz) 0.008 (0.05 ~ 26.5GHz) 0.008 (26.5 ~ 50GHz) 0.051 (50 ~ 67GHz)
IF Bandwidth	1Hz ~ 30M Hz	
Amplitude Display resolution	0.001dB /div	
Phase Display Resolution	0.001°/div	
General Characteristic		
Port Connectors	1.85mm (head), system impedance 50 ohms	
Number of Measured Ports	S3674K / L standard: 2 ports; S3674K / L-400 option: 4 ports	
Peripheral Interface	GPIB interface, USB interface, DP interface, LAN interface	
Display	A 15.6-inch high-resolution touch screen	
Dimensions	Overall dimensions (W*H*D, including handles, feet and pads): 2-port: 475mm * 279mm * 560mm 4-port: 475mm * 279mm * 660mm	
Max. Power Consumption	500W	
Power Supply	50Hz single-phase 220V or 50Hz / 60Hz single-phase 110V AC	
Max. Weight	50kg	

S3674N/P/PA/QA Technical Specification



Frequency Characteristic		
Frequency Range	S3674N: 10M Hz ~ 90GHz S3674P: 10M Hz ~ 110GHz	
	S3674PA: 10M Hz ~ 110GHz S3674QA: 10M Hz ~ 120GHz	
Frequency Resolution	1Hz	
Frequency Accuracy	$\pm 1 \times 10^{-7}$ (23°C±3°C)	
Port Harmonic Suppression	S3674N/P	S3674PA/QA
Port Harmonic Suppression	-13dBc (0.01 ~ 4GHz) -25dBc (4 ~ 14GHz) -51dBc (14 ~ 45GHz) -31dBc (45 ~ 55GHz)	-13dBc (0.01 ~ 3.2GHz) -25dBc (3.2 ~ 14GHz) -31dBc (14 ~ 60GHz)
Port Power Characteristics	S3674N/P	S3674PA/QA
Max. Output Power	+10dBm (10 ~ 50MHz) +10dBm (0.05 ~ 2GHz) +10dBm (2 ~ 30GHz) +5dBm (30 ~ 40GHz) +1dBm (40 ~ 90GHz) +0dBm (90 ~ 110GHz)	+5dBm (10 ~ 50MHz) +10dBm (0.05 ~ 2GHz) +8dBm (2 ~ 3.2GHz) +10dBm (3.2 ~ 10GHz) +5dBm (10 ~ 24GHz) +1dBm (24 ~ 40GHz) +3dBm (40 ~ 60GHz) +0dBm (60 ~ 110GHz) -5dBm (110 ~ 120GHz)
Pulse Characteristic	S3674N/P	S3674PA/QA
Pulse Width Setting Range	33ns ~ 60s	/
Pulse ON/OFF Ratio	64dB (0.01 ~ 4GHz) 70dB (4 ~ 90GHz)	/
Network Parameter Characteristic	S3674N/P	S3674PA/QA
System dynamic range	70dB (10 ~ 500MHz) 110dB (0.5 ~ 1GHz) 110dB (1 ~ 26.5GHz) 107dB (26.5 ~ 35GHz) 95dB (35 ~ 50GHz) 90dB (50 ~ 72GHz) 100dB (72 ~ 90GHz) 95dB (90 ~ 110GHz)	70dB (10 ~ 500MHz) 105dB (0.5 ~ 1GHz) 110dB (1 ~ 26.5GHz) 107dB (26.5 ~ 50GHz) 90dB (50 ~ 72GHz) 100dB (72 ~ 90GHz) 90dB (90 ~ 110GHz) 80dB (110 ~ 120GHz)
Effective Directivity	35dB (0.01 ~ 3.2GHz) 30dB (3.2 ~ 10GHz) 24dB (10 ~ 50GHz) 23dB (50 ~ 67GHz) 20dB (67 ~ 90GHz) 20dB (90 ~ 110GHz)	25dB (0.01 ~ 3.2GHz) 25dB (3.2 ~ 10GHz) 20dB (10 ~ 67GHz) 22dB (67 ~ 90GHz) 20dB (90 ~ 110GHz) 20dB (110 ~ 120GHz)
Effective Load Match	35dB (0.01 ~ 3.2GHz) 36dB (3.2 ~ 10GHz) 33dB (10 ~ 26.5GHz) 30dB (26.5 ~ 50GHz) 25dB (50 ~ 67GHz) 20dB (67 ~ 90GHz) 20dB (90 ~ 110GHz)	29dB (0.01 ~ 3.2GHz) 30dB (3.2 ~ 10GHz) 28dB (10 ~ 26.5GHz) 30dB (26.5 ~ 50GHz) 26dB (50 ~ 90GHz) 25dB (90 ~ 110GHz) 25dB (110 ~ 120GHz)
Reflection Tracking	±0.050dB (0.01 ~ 3.2GHz) ±0.030dB (3.2 ~ 10GHz) ±0.033dB (10 ~ 26.5GHz) ±0.080dB (26.5 ~ 50GHz) ±0.091dB (50 ~ 67GHz) ±0.095dB (67 ~ 90GHz) ±0.099dB (90 ~ 110GHz)	±0.080dB (0.01 ~ 3.2GHz) ±0.055dB (3.2 ~ 10GHz) ±0.090dB (10 ~ 26.5GHz) ±0.075dB (26.5 ~ 50GHz) ±0.150dB (50 ~ 67GHz) ±0.250dB (67 ~ 90GHz) ±0.300dB (90 ~ 110GHz) ±0.300dB (110 ~ 120GHz)

Transmission Tracking	±0.149dB (0.01 ~ 3.2GHz) ±0.090dB (3.2 ~ 10GHz) ±0.110dB (10 ~ 26.5GHz) ±0.130dB (26.5 ~ 50GHz) ±0.1500dB (50 ~ 67GHz) ±0.200dB (67 ~ 90GHz) ±0.300dB (90 ~ 110GHz)	±0.260dB (0.01 ~ 3.2GHz) ±0.164dB (3.2 ~ 10GHz) ±0.101dB (10 ~ 26.5GHz) ±0.189dB (26.5 ~ 50GHz) ±0.343dB (50 ~ 67GHz) ±0.449dB (67 ~ 90GHz) ±0.483dB (90 ~ 110GHz) ±0.483dB (110 ~ 120GHz)
Others	S3674N/P	S3674PA/QA
Amplitude Trace Noise dB rms (100Hz IF bandwidth)	0.050 (10 ~ 100MHz) 0.004 (0.1 ~ 26.5GHz) 0.007 (26.5 ~ 50GHz) 0.009 (50 ~ 90GHz) 0.009 (90 ~ 110GHz)	0.200 (10 ~ 100MHz) 0.007 (0.1 ~ 26.5GHz) 0.004 (26.5 ~ 50GHz) 0.007 (50 ~ 110GHz) 0.009 (110 ~ 120GHz)
IF Bandwidth	1Hz ~ 30M Hz	
General Characteristic		
Port Connectors	1.0mm (male), system impedance 50 ohms	
Number of Measured Ports	S3674N/P standard: 2 ports, S3674N/P-400 option: 4 ports S3674PA/QA: S3674E/F/G/H/K/L + S3674-009: 2 ports S3674E/F/G/H/K/L + S3674-010: 4 ports	
Peripheral Interface	GPIB interface, USB interface, DP interface, LAN interface	
Display	15.6-inch touch screen with 1920*1080 high-resolution	
Dimensions	Overall dimensions (W*H*D, including handles, feet and pads): S3674N/P: 2-port: 475mm * 279mm * 560mm 4-port: 475mm * 279mm * 660mm	
Max. Power Consumption	S3674N/P: 500W S3674PA/QA: 600W	
Power Supply	50Hz 220V or 50Hz / 60Hz 110V AC	
Max. Weight	S3674N/P: 50kg S3674PA/QA: 84kg	

Order Information

Model	Description	Structure
S3674B	Vector Network Analyzer (10 MHz ~ 9 GHz)	Single Unit
S3674C	Vector Network Analyzer (10 MHz ~ 14 GHz)	Single Unit
S3674D	Vector Network Analyzer (10 MHz ~ 20 GHz)	Single Unit
S3674E	Vector Network Analyzer (10 MHz ~ 26.5 GHz)	Single Unit
S3674F	Vector Network Analyzer (10 MHz ~ 32 GHz)	Single Unit
S3674G	Vector Network Analyzer (10 MHz ~ 44 GHz)	Single Unit
S3674H	Vector Network Analyzer (10 MHz ~ 50 GHz)	Single Unit
S3674K	Vector Network Analyzer (10 MHz ~ 53 GHz)	Single Unit
S3674L	Vector Network Analyzer (10 MHz ~ 67 GHz)	Single Unit
S3674N	Vector Network Analyzer (10 MHz ~ 90 GHz)	Single Unit
S3674P	Vector Network Analyzer (10 MHz ~ 110 GHz)	Single Unit
S3674PA	Vector Network Analyzer (10 MHz ~ 110 GHz)	With Separate Controller and 1.0mm Extender Modules
S3674QA	Vector Network Analyzer (10 MHz ~ 120 GHz)	With Separate Controller and 1.0mm Extender Modules



S3674PA/QA Vector Network Analyzer (10 MHz~110/120 GHz) System Configuration


No.	Name	Configuration	
		2-port model	4-port model
1	Vector Network Analyzer and options	S3674E/F/G/H/K/L + S20	S3674E/F/G/H/K/L + 400 + S20
2	Extension Controller	S3674-009	S3674-010
3	110 GHz Coaxial Frequency Extender Modules	S3674-011 (Quantity 2)	S3674-011 (Quantity 4)
4	120 GHz Coaxial Frequency Extender Modules	S3674-012 (Quantity 2)	S3674-012 (Quantity 4)
			



Standard Configuration





No.	Model	Quantity	Description
1	Power Cord Assembly	1	Standard three-core power cord
2	USB Mouse	1	
3	Quick Operation Guide	1	
4	Certificate of Conformity	1	
5	Aluminum Alloy Box	1	For transportation

S3674 Series Vector Network Analyzer Common Options

No.	Model	Name	Function	
1	S3674-006	English Version Option	With English front and rear panel and English operating system.	
2	S3674-007	Linux Operating system	Configure the Linux operating system to replace the Windows operating system.	
3	S3674-009	2-port Millimeter Wave Test Set	It is used for expanding the frequency of the vector network analyzer to expand the two-port vector network analyzer. Requires: Option S3674-S20.	
4	S3674-010	4-port Millimeter Wave Test Set	It is used for the frequency expansion of vector network analyzer to realize the expansion function of four-port vector network analyzer. Requires: Option S3674-S20.	

5	S3674-011	110GHz Coaxial Frequency Extender	For vector network analyzer frequency expansion to achieve coaxial S parameter measurement from 10 MHz to 110 GHz. Choose 2 modules for 2-port configuration and choose 4 modules for 4-port configuration. 2-Port Requires: Option S3674-009 + S3674-S20. 4-Port Requires: Option 400 + S3674-010 + S3674-S20.	
6	S3674-012	120GHz Coaxial Frequency Extender	For vector network analyzer frequency expansion to achieve coaxial S parameter measurement from 10 MHz to 110 GHz. Choose 2 modules for 2-port configuration and choose 4 modules for 4-port configuration. 2-Port Requires: Option S3674-009 + S3674-S20. 4-Port Requires: Option 400 + S3674-010 + S3674-S20.	
7	S3674-S05	S-parameter Signal Integrity Analysis Function	The signal integrity characteristics, such as frequency domain, time domain TDR and crosstalk, can automatically convert the graph curve into a test report. For the full range.	
8	S3674-S07	Automatic Fixture Removal Function(AFR)	For automatic testing and removal of single-end and balance device measuring fixture. For the full range.	
9	S3674-S10	Time Domain measurement Function	For time domain measurements, you can determine and analyze the discontinuous positions in devices, fixtures, or cables. For the full range.	
10	S3674-S11	Advanced Time Domain Analysis Function	For TDR time-domain impedance testing, eye-map analysis, etc. For the full range.	
11	S3674-S16	True difference measurement function	For the real difference mode and common mode excitation balance parameters measurement. For S3674B / C / D / E / F / G / H / K / L. Requires: Option 400 + 404 + S3674-S28.	
12	S3674-S18	Fast CW Sweep Function	Data was read immediately using the FIFO buffer method. For the full range.	
13	S3674-S20	Frequency Offset Function	For the frequency offset measurements. For the full range.	
14	S3674-S22	Mixer/Converter Scalar Measurement	For the mixer scalar parameter measurement. For S3674B / C / D / E / F / G / H / K / L. Requires: Option S3674-S20.	
15	S3674-S24	Embedded LO Frequency Converter Measurement	Used for embedded local vibration Converter measurement. For S3674B / C / D / E / F / G / H / K / L. 2-Port Requires: Option 204 + S3674-S20. 4-Port Requires: Option 404 + S3674-S20. Either S3674-S22 or 023 is required.	
16	S3674-S26	Gain Compression Measurement	Gain compression measurement for active devices such as amplifiers. For S3674B / C / D / E / F / G / H / K / L.	
17	S3674-S28	Phase-scan Measurement	For the phase-scan measurements. For S3674B / C / D / E / F / G / H / K / L. Requires: Option 400.	
18	S3674-S29	Differential I/Q Measurement	Suitable for testing devices such as differential and I/Q mixers and amplifiers. It measures parameters such as conversion loss or gain, LO feedthrough, local oscillator isolation, differential harmonics, total harmonic distortion (THD), and image rejection under differential or I/Q excitation. It supports measurements with customizable parameters such as phase, power, and frequency. Applicable to S3674B/C/D/E/F/G/H/K/L models. Requires 400+S20+S28.	
19	S3674-041	1.2m bundle cable for 1mm coaxial extender module	For S3674-011/S3674-012 coaxial extender modules. The cable length is 1.2m	
20	S3674-042	Millimeter Wave Test Set-Waveguide Frequency Extender Bundle Cable	For VNA waveguide expansion system, the extension controller interconnects with the waveguide spread spectrum module. Two port configuration need 2 and four port configuration need 4 cables.	
21	S3674-043	S3674E 4-port Frequency Extension System Cable	It is used for four-port vector network analyzer and waveguide spread frequency module.	
22	S3674-044	S3674F/G/H 4-port Frequency Extension System Cable	It is used for four-port vector network analyzer and waveguide spread frequency module.	

23	S3674-045	S3674K/L 4-port Frequency Extension System Cable	It is used for four-port vector network analyzer and waveguide spread frequency module.	
24	S3674 P- 046	1mm coaxial cable, 100mm long	One 1.0mm(m)-1.0mm(f) coaxial cable and one 1.0mm(f)-1.0mm(f) coaxial cable. The length is 100mm.	
25	S3674 P- 047	1mm coaxial cable, 200mm long	One 1.0mm(m)-1.0mm(f) coaxial cable and one 1.0mm(f)-1.0mm(f) coaxial cable. The length is 200mm.	
26	S3674 P- 048	1mm coaxial cable, 300mm long	One 1.0mm(m)-1.0mm(f) coaxial cable and one 1.0mm(f)-1.0mm(f) coaxial cable. The length is 300mm.	
27	S3674-061	Extension Table for Test	Desktop extension for the test, length and width =500mm * 350mm.	
28	S3674-062	Rack mount kit	Dedicated kit installed in the cabinet.	
29	S3674-063	User Manual (paper version)	Provide a detailed user manual in the paper version.	
30	S3674-GZ	Return-to-factory update	To return to factory for hardware update	
31		31101 N-type 50 Ω Mechanical calibration kit	For VNA calibration (DC~18GHz)	
32		31121A 3.5mm Mechanical calibration kit	For VNA calibration (DC~6GHz)	
33		31121 3.5mm Mechanical calibration kit	For VNA calibration (DC~26.5GHz)	
34		20202 3.5mm Mechanical calibration kit	For VNA calibration (DC~9GHz)	
35		31123 2.4mm Mechanical calibration kit	For VNA calibration (DC~40GHz)	
36		31123A 2.4mm Mechanical calibration kit	For VNA calibration (DC~50GHz)	
37		20209LB 1.82mm Mechanical calibration kit	For VNA calibration (DC~67GHz)	
38		20402D Electronic calibration kit	For VNA calibration (100 kHz ~ 18 GHz, N Type, 2 port)	
39		20402E Electronic calibration kit	For VNA calibration (10MHz~26.5GHz, 3.5mm 2-port)	
40		20402F Electronic calibration kit	For VNA calibration (10 MHz ~ 40 GHz, 2.92 mm 2-port)	
41		20402H Electronic calibration kit	For VNA calibration (10 MHz to 50 GHz, 2.4 mm 2-port)	
42		20402L Electronic calibration kit	For VNA calibration (10 MHz to 67 GHz, 1.85mm 2-port)	
43		20404D Electronic calibration kit	For VNA calibration (100 kHz ~ 18 GHz, N Type, 4 port)	
44		20404E Electronic calibration kit	For VNA calibration (10MHz~26.5GHz, 3.5mm 4-port)	
45		20404F Electronic calibration kit	For VNA calibration (10 MHz ~ 40 GHz, 2.92 mm 4-port)	
46		20404H Electronic calibration kit	For VNA calibration (10 MHz to 50 GHz, 2.4 mm 4-port)	
47		20404L Electronic calibration kit	For VNA calibration (10 MHz to 67 GHz, 1.85mm 4-port)	
48		FB0HA0HB025.0 3.5mm Gore test cable	Phase Stable Cable, Testing port (3.5mm -Male) Suitable for S3674B / C / D / E	
49		FB0HA0HC025.0 3.5mm Gore test cable	Phase Stable Cable, Testing port (3.5mm -Female) Suitable for S3674B / C / D / E	
50		FE0BN0BM025.0 2.4mm Gore test cable	Phase Stable Cable, Testing port (2.4mm -Male) Suitable for S3674F / G / H	
51		FE0BN0BL025.0 2.4mm Gore test cable	Phase Stable Cable, Testing port (2.4mm -Female) Suitable for S3674F / G / H	
52		FE0BN0AH025.0 2.4mm-N-type Gore test cable	Phase Stable Cable, Testing port (N type) Suitable for S3674F / G / H	
53		FE0BN0AL025.0 The 2.4mm-N type Gore test cable	Phase Stable Cable, Testing port (N-type -Female at the test end) Suitable for S3674F / G / H	
54		FE0BN0HB025.0 2.4mm-3.5mm Gore test cable	Phase Stable Cable, Testing port (3.5mm -Male) Suitable for S3674F / G / H	

55		FE0BN0HC025.0 2.4mm-3.5mm Gore test cable	Phase Stable Cable, Testing port (test end 3.5mm -Female) Suitable for S3674F / G / H	
56		FE0BN0HR025.0 2.4mm-2.92mm Gore test cable	Phase Stable Cable, Testing port (test end 2.92mm -Male) Suitable for S3674F / G / H	
57		FE0BN0HQ025.0 2.4mm-2.92mm Gore test cable	Phase Stable Cable, Testing port (2.92mm shade at test end), Suitable for S3674F / G / H	
58		FF0CNO0CM025.0 1.85mm Gore test cable	Phase Stable Cable, Testing port (1.85mm -Male) Suitable for S3674K / L	
59		FF0CNO0CL025.0 1.85mm Gore test cable	Phase Stable Cable, Testing port (test end 1.85mm -Female), Suitable for S3674K / L	
60		87308 3.5mm test cable	Phase Stable Cable, Testing port (3.5mm -Male) Suitable for S3674B / C / D / E	
61		87308A 3.5mm test cable	Phase Stable Cable, Testing port (test end 3.5mm -Female), Suitable for S3674B / C / D / E	
62		87308HA 2.4mm test cable	Phase Stable Cable, Testing port (test end 2.4mm -Female), Suitable for S3674F / G / H	
63		87308HB 2.4mm test cable	Phase Stable Cable, Testing port (2.4mm -Male) Suitable for S3674F / G / H	
64		87302NN 1.85mm test cable	Phase Stable Cable, Testing port (test end 1.85mm -Female) Suitable for S3674K / L	
65		87302NM 1.85mm test cable	Phase Stable Cable, Testing port (1.85mm -Male) Suitable for S3674K / L	
66	S87233C	USB CW Power Sensor	8kHz ~ 12GHz, -70dBm ~ +20dBm	USB CW Power Sensor 
67	S87233D	USB CW Power Sensor	10MHz ~ 18GHz, -70dBm ~ +20dBm	
68	S87233E	USB CW Power Sensor	50MHz ~ 26.5GHz, -70dBm ~ +20dBm	
69	S87233F	USB CW Power Sensor	50MHz ~ 40GHz, -70dBm ~ +20dBm	
70	S87233L	USB CW Power Sensor	50MHz ~ 67GHz, -55dBm ~ +20dBm	
71	S87235B	USB Average Power Sensor	8kHz – 8GHz, -70dBm – +26dBm	USB Average power Sensor for 
72	S87235C	USB Average Power Sensor	10MHz ~ 8GHz, -60dBm ~ +23dBm	
73	S87235D	USB Average Power Sensor	10MHz ~ 18GHz, -70dBm ~ +26dBm	
74	S87235F	USB Average Power Sensor	10MHz ~ 33GHz, -65dBm ~ +26dBm	
75	S87235FA	USB Average Power Sensor	10MHz ~ 40GHz, -65dBm ~ +26dBm	
76	S87235H	USB Average Power Sensor	10MHz ~ 50GHz, -65dBm ~ +23dBm	
77	S87235L	USB Average Power Sensor	50MHz ~ 67GHz, -60dBm ~ +23dBm	
78	S16613DA	BNC Noise Source	10MHz ~ 18GHz, ENR 5dB ~ 8dB	BNC interface traditional noise source 
79	S16613DB	BNC Noise Source	10MHz ~ 18GHz, ENR 14dB ~ 17dB	
80	S16613EA	BNC Noise Source	10MHz ~ 26.5GHz, ENR 5dB ~ 8dB	
81	S16613EB	BNC Noise Source	10MHz ~ 26.5GHz, ENR 12dB ~ 17dB	
82	S16613FB	BNC Noise Source	10MHz ~ 40GHz, ENR 12dB ~ 19dB	
83	S16613LC	BNC Noise Source	10MHz ~ 50GHz, ENR 10dB ~ 19dB	
84	S16613LC	BNC Noise Source	10MHz ~ 67GHz, ENR 7dB ~ 23dB	USB noise source 
85	S16615DA	USB Noise Source	10MHz ~ 18GHz, ENR 5dB ~ 8dB	
86	S16615DB	USB Noise Source	10MHz ~ 18GHz, ENR 14dB ~ 17dB	
87	S16615EA	USB Noise Source	10MHz ~ 26.5GHz, ENR 5dB ~ 8dB	
88	S16615EB	USB Noise Source	10MHz ~ 26.5GHz, ENR 12dB ~ 17dB	
89	S16615FB	USB Noise Source	10MHz ~ 40GHz, ENR 12dB ~ 19dB	
90	S16615HB	USB Noise Source	10MHz ~ 50GHz, ENR 10dB ~ 19dB	
91	S16615LC	USB Noise Source	10MHz ~ 67GHz, ENR 7dB ~ 23dB	
91		87601 Microwave Assistant (Type-N)	Coaxial adaptor package (N-type interface converted to 3.5mm, 2.4mm interface, etc.)	
92		87601A Microwave Assistant (3.5mm)	Coaxial adaptor package (3.5mm interface converted to N-type, 2.4mm interface, etc.)	
93		87601B Microwave Assistant (2.92mm)	Coaxial adapter package (2.92mm interface converted to 2.4mm interface, etc.)	
94		87601C Microwave Assistant (2.4mm)	Coaxial adaptor package (2.4mm interface to N, 3.5mm, 2.92mm, 1.85mm, etc.)	

S3674B Vector Network Analyzer Option (10 MHz ~ 9 GHz)

No.	Model	Name	Function
1.	S3674B-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674B-201 + S3674B-204 4-Port Requires: Option S3674B-401 + S3674B-404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2.	S3674B-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3.	S3674B-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674B-400 + S3674B-404 + S3674-S20.
4.	S3674B-201	2-port Programmable Step Attenuator	Configure 2-70dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674B-204.
5.	S3674B-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674B-204, S3674B-205 cannot be configured at the same time.
6.	S3674B-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
7.	S3674B-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674B-201+ S3674B-204, S3674B-203 cannot be configured at the same time.
8.	S3674B-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 9 GHz.
9.	S3674B-401	4-port programmable Step Attenuator	Install 4-70dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674B-400 + S3674B-404.
10.	S3674B-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674B-400 + S3671B-404 + S3674-S20.
11.	S3674B-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674B-400 + S3674B-404, S3674B-405 cannot be configured at the same time.
12.	S3674B-404	Configurable Test Set	Expand the test device of the four-port model, add the paneljumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674B-400.
13.	S3674B-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674B-400 + S3674B-401 + 3672B-404. S3674B-403 cannot be configured at the same time.
14.	S3674B-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.
15.	S3674B-JL	Professional calibration services	Provide metrological calibration services and provide metrological reports
16.	S3674B -EWT1	Extended warranty for 1 year	Beyond the warranty period, the warranty is extended for 1 year, and the two-year extended warranty is optional for 2 items, and so on.


The S3674C Vector Network Analyzer Option (10 MHz ~ 14 GHz)

No.	Model	Name	Function
1.	S3674C-003	Noise Measurement	Figure For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674C-201 + S3674C-204. 4-Port Requires: Option S3674C-401 + S3674C-404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2.	S3674C-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3.	S3674C-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674C-400 + S3674C-404 + S3674-S20.
4.	S3674C-201	2-port Programmable Step Attenuator	Configure 2-70dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674C-204.
5.	S3674C-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674C-204. S3674C-205 cannot be configured at the same time.
6.	S3674C-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
7.	S3674C-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674C-201 + S3674C-204 S3674C-203 cannot be configured at the same time.
8.	S3674C-400	4-port measurement	Dual source excitation four-port vector network analyzer configuration with frequency range 10 MHz to 14 GHz.
9.	S3674C-401	4-port programmable Step Attenuator	Install 4-70dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674C-400 + S3674C-404.
10.	S3674C-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674C-400 + S3674C-404 + S3674-S20.
11.	S3674C-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674C-400 + S3674C-404. S3674C-405 cannot be configured at the same time.
12.	S3674C-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674C-400.
13.	S3674C-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674C-400 + S3674C-401 + S3674C-404. S3674C-403 cannot be configured at the same time.
14.	S3674C-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.
15.	S3674C-JL	Professional calibration services	Provide metrological calibration services and provide metrological reports
16.	S3674C -EWT1	Extended warranty for 1 year	Beyond the warranty period, the warranty is extended for 1 year, and the two-year extended warranty is optional for 2 items, and so on.


The S3674D Vector Network Analyzer Option (10 MHz ~ 20 GHz)

No.	Model	Name	Function
1.	S3674D-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. Note: Two-port electronic calibrators and noise sources need to be purchased separately. 2-Port Requires: Option S3674D-201 + S3674D-204. 4-Port Requires: Option S3674D-401 + S3674D-404.
2.	S3674D-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3.	S3674D-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674D-400 +S3674D-404 + S3674-S20.
4.	S3674D-201	2-port Programmable Step Attenuator	Configure 2-70dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674D- 204.
5.	S3674D-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674D- 204, S3674D-205 cannot be configured at the same time.
6.	S3674D-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
7.	S3674D-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674D-201 +S3674D-204, S3674D-203 cannot be configured at the same time.
8.	S3674D-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 20 GHz.
9.	S3674D-401	4-port programmable Step Attenuator	Install 4-70dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674D- 400 +S3674D- 404.
10.	S3674D-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674D- 400 + S3674D-404 + S3674-S20.
11.	S3674D-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674D-400 +S3674D-404, S3674D-405 cannot be configured at the same time.
12.	S3674D-404	Configurable Test Set	Expand the test device of the four-port model, add the paneljumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674D-400.
13.	S3674D-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674D-400 + S3674D-401 + S3674D-404. S3674D-403 cannot be configured at the same time.
14.	S3674D-S30	Spectrum Function Analysis	Used to provide a multichannel spectrum testing function.
15.	S3674D-JL	Professional calibration services	Provide metrological calibration services and provide metrological reports
16.	S3674D -EWT1	Extended warranty for 1 year	Beyond the warranty period, the warranty is extended for 1 year, and the two-year extended warranty is optional for 2 items, and so on.


The S3674E Vector Network Analyzer Option (10 MHz ~26.5 GHz)

No.	Model	Name	Function
1.	S3674E-003	Noise Measurement	Figure For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674E-201 + S3674E-204. 4-Port Requires: Option S3674E-401 +S3674E-404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2.	S3674E-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3.	S3674E-018	Multi-port Controller	Extension For the extended vector network analyzer is 16 port. Requires: Option S3674E- 400 +S3674E-404. 
4.	S3674E-023	Mixer/Converter Measurement	Vector For the mixer-based vector parameter measurement. Requires: Option S3674E- 400 +S3674E- 404 + S3674-S20.
5.	S3674E-201	2-port Programmable Step Attenuator	Configure 2-70dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674E-204.
6.	S3674E-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674E-204, S3674E-205 cannot be configured at the same time.
7.	S3674E-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
8.	S3674E-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674E-201 +S3674E-204, S3674E-203 cannot be configured at the same time.
9.	S3674E-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with frequency range 10MHz~26.5GHz.
10.	S3674E-401	4-port programmable Step Attenuator	Install 4-70dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674E-400 +S3674E- 404.
11.	S3674E-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674E-400 +S3674E- 404 + S3674-S20.
12.	S3674E-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674E-400 +S3674E-404, S3674E-405 cannot be configured at the same time.
13.	S3674E-404	Configurable Test Set	Expand the test device of the four-port model, add the paneljumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674E- 400.
14.	S3674E-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674E-400 +S3674E-401 + S3674E- 404,S3674E-403 cannot be configured at the same time.
15.	S3674E-S30	Spectrum Function	Analysis Used to provide a multichannel spectrum testing function.
16.	S3674E-JL	Professional calibration services	Provide metrological calibration services and provide metrological reports
17.	S3674E -EWT1	Extended warranty for 1 year	Beyond the warranty period, the warranty is extended for 1 year, and the two-year extended warranty is optional for 2 items, and so on.


The S3674F Vector Network Analyzer Option (10 MHz ~32GHz)

No.	Model	Name	Function
1.	S3674F-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674F-201 +S3674F- 204. 4-Port Requires: Option S3674F-401 +S3674F- 404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2.	S3674F-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3.	S3674F-018	Multi-port Extension Controller	For the extended vector network analyzer is 16 port. Requires: Option S3674F- 400 +S3674F-404. 
4.	S3674F-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674F-400 +S3674F- 404 + S3674-S20.
5.	S3674F-201	2-port Programmable Step Attenuator	Configure 2-60dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674F-204.
6.	S3674F-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674F-204, S3674F-205 Can not be configured at the same time.
7.	S3674F-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
8.	S3674F-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674F-201 +S3674F- 204, S3674F-203 cannot be configured at the same time.
9.	S3674F-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 32 GHz.
10.	S3674F-401	4-port programmable Step Attenuator	Install 4-60dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674F-400 +S3674F- 404.
11.	S3674F-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674F-400 +S3674F- 404 + S3674-S20.
12.	S3674F-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674F-400 +S3674F-404, S3674F-405 cannot be configured at the same time.
13.	S3674F-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674F- 400.
14.	S3674F-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674F- 400 + S3674F-401 +S3674F-404, S3674F-403 cannot be configured at the same time.
15.	S3674F-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.
16.	S3674F-JL	Professional calibration services	Provide metrological calibration services and provide metrological reports
17.	S3674F -EWT1	Extended warranty for 1 year	Beyond the warranty period, the warranty is extended for 1 year, and the two-year extended warranty is optional for 2 items, and so on.


The S3674G Vector Network Analyzer Option (10 MHz ~ 44 GHz)

No.	Model	Name	Function
1.	S3674G-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674G-201 + S3674G-204; 4-Port Requires: Option S3674G-401 + S3674G-404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2.	S3674G-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3.	S3674G-018	Multi-port Controller Extension	For the extended vector network analyzer is 16 port. Requires: Option S3674G-400 +S3674G-404. 
4.	S3674G-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674G-400 +S3674G-404 +S3674-S20.
5.	S3674G-201	2-port Programmable Step Attenuator	Configure 2-60dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674G-204.
6.	S3674G-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674G-204, S3674G-205 cannot be configured at the same time.
7.	S3674G-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
8.	S3674G-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674G-201+ S3674G-204, S3674G-203 cannot be configured at the same time.
9.	S3674G-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 44 GHz.
10.	S3674G-401	4-port programmable Step Attenuator	Install 4-60dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674G-400 +S3674G-404.
11.	S3674G-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674G-400 +S3674G-404 +S3674G-S20.
12.	S3674G-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674G-400 +S3674G-404, S3674G-405 cannot be configured at the same time.
13.	S3674G-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674G-400.
14.	S3674G-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674G-400 +S3674G-401 +S3674G-404, S3674G-403 cannot be configured at the same time.
15.	S3674G-S30	Spectrum Function Analysis	Used to provide a multichannel spectrum testing function.
16.	S3674G-JL	Professional calibration services	Provide metrological calibration services and provide metrological reports
17.	S3674G -EWT1	Extended warranty for 1 year	Beyond the warranty period, the warranty is extended for 1 year, and the two-year extended warranty is optional for 2 items, and so on.


The S3674H Vector Network Analyzer Option (10 MHz ~ 50 GHz)

No.	Model	Name	Function
1.	S3674H-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674H-201 + S3674H-204 4-Port Requires: Option S3674H-401 +S3674H- 404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2.	S3674H-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3.	S3674H-018	Multi-port Extension Controller	For the extended vector network analyzer is 16 port. Requires: Option S3674H- 400 +S3674H-404. 
4.	S3674H-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674H-400 +S3674H- 404 + S3674-S20.
5.	S3674H-201	2-port Programmable Step Attenuator	Configure 2-60dB step attenuators for source path and 2-35dB step attenuators for receiver path. Requires: Option S3674H-204.
6.	S3674H-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674H-204, S3674H-205 cannot be configured at the same time.
7.	S3674H-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
8.	S3674H-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674H-201 +S3674H-204, S3674H-203 cannot be configured at the same time.
9.	S3674H-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 50 GHz.
10.	S3674H-401	4-port programmable Step Attenuator	Install 4-60dB step attenuators for source path and 4-35dB step attenuators for receiver path. Requires: Option S3674H-400+S3674H- 404.
11.	S3674H-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674H-400 + S3674H- 404 + S3674-S20.
12.	S3674H-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674H-400 + S3674H-404, S3674H-405 cannot be configured at the same time.
13.	S3674H-404	Configurable Test Set	Expand the test device of the four-port model, add the paneljumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674H-400.
14.	S3674H-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674H-400 + S3674H-401 + S3674H- 404. S3674H-403 cannot be configured at the same time.
15.	S3674H-S30	Spectrum Function Analysis	Used to provide a multichannel spectrum testing function.
16.	S3674H-JL	Professional calibration services	Provide metrological calibration services and provide metrological reports
17.	S3674H-EWT1	Extended warranty for 1 year	Beyond the warranty period, the warranty is extended for 1 year, and the two-year extended warranty is optional for 2 items, and so on.

The S3674K Vector Network Analyzer Option (10 MHz ~ 53 GHz)

No.	Model	Name	Function
1.	S3674K-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674K-201 + S3674 K -204 4-Port Requires: Option S3674K-401 +S3674 K - 404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2.	S3674K-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3.	S3674K-018	Multi-port Extension Controller	For the extended vector network analyzer is 16 port. Requires: Option S3674K- 400 +S3674K-404. 
4.	S3674K-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674K-400 + S3674K-404 + S3674-S20.
5.	S3674K-201	2-port Programmable Step Attenuator	2-50dB programmed step attenuators for source path and 2-50dB programmed step attenuators for receiver path. Requires: Option S3674K-204.
6.	S3674K-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674K-204, S3674K-205 cannot be configured at the same time.
7.	S3674K-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
8.	S3674K-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674K-201 + S3674K-204, S3674K-203 cannot be configured at the same time.
9.	S3674K-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 53 GHz.
10.	S3674K-401	4-port programmable Step Attenuator	4-50dB programmed step attenuators for source path and 4-50dB programmed step attenuators for receiver path. Requires: Option S3674K- 400 +S3674K- 404.
11.	S3674K-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674K- 400 +S3674K- 404 +S3674- S20.
12.	S3674K-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674K-400+S3674K-404, S3674K-405 cannot be configured at the same time.
13.	S3674K-404	Configurable Test Set	Expand the test device of the four-port model, add the panel jumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674K-400.
14.	S3674K-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674K-400+S3674K-401 +S3674K-404, S3674H-403 cannot be configured at the same time.
15.	S3674K-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.
16.	S3674K-JL	Professional calibration services	Provide metrological calibration services and provide metrological reports
17.	S3674 K -EWT1	Extended warranty for 1 year	Beyond the warranty period, the warranty is extended for 1 year, and the two-year extended warranty is optional for 2 items, and so on.

The S3674L Vector Network Analyzer Option (10 MHz ~ 67 GHz)

No.	Model	Name	Function
1.	S3674L-003	Noise Figure Measurement	For accurate measurement of S parameters, noise coefficient, and noise parameters. 2-Port Requires: Option S3674 L -201 + S3674L -204 4-Port Requires: Option S3674 L -401 +S3674L - 404. (Note: Two-port electronic calibrators and ordinary noise sources need to be purchased separately.)
2.	S3674L-008	Pulse Measurement	For the S parameter measurement in the pulse state, ports 1 and 3 output the pulse modulation signal.
3.	S3674L-018	Multi-port Extension Controller	For the extended vector network analyzer is 16 port. Requires: Option S3674L- 400 +S3674K-404. 
4.	S3674L-023	Mixer/Converter Vector Measurement	For the mixer-based vector parameter measurement. Requires: Option S3674L-400 +S3674KL-404 +S3674-S20.
5.	S3674L-201	2-port Programmable Step Attenuator	2-50dB programmed step attenuators for source path and 2-50dB programmed step attenuators for receiver path. Requires: Option S3674L-204.
6.	S3674L-203	2-port 500Hz Low-frequency Expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674L-204,S3674L-205 cannot be configured at the same time.
7.	S3674L-204	Configurable Test Set	Expand the test device of the two-port model, add the panel jumper, and can use A, B, R1, R2 receiver independently.
8.	S3674L-205	2-port T-type Bias-tees	Two T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674L-201 + S3674L-204, S3674L-203 cannot be configured at the same time.
9.	S3674L-400	4-port measurement	Dual-source excitation four-port vector network analyzer configuration with a frequency range of 10 MHz to 67 GHz.
10.	S3674L-401	4-port programmable Step Attenuator	4-50dB programmed step attenuators for source path and 4-50dB programmed step attenuators for receiver path. Requires: Option S3674L-400 + S3674L-404.
11.	S3674L-402	Active Intermodulation Distortion Measurement	For active intermodulation distortion signal measurement. Requires: Option S3674L-400 +S3674L-404 + S3674-S20.
12.	S3674L-403	4-port 500Hz low-frequency expansion	The lower frequency range can be extended to 500Hz. Requires: Option S3674L-400 +S3674L-404, S3674L-405 cannot be configured at the same time.
13.	S3674L-404	Configurable Test Set	Expand the test device of the four-port model, add the paneljumper, and can independently use A, B, C, D, R1, R2, R3, R4 receivers. Requires: Option S3674L-400.
14.	S3674L-405	4-port T type Bias-tees	Four T-type biasing devices are configured internally for the port output DC offset voltage. Requires: Option S3674L-400 + S3674L-401 + S3674L-404, S3674L-403 cannot be configured at the same time.
15.	S3674L-S30	Spectrum Analysis Function	Used to provide a multichannel spectrum testing function.
16.	S3674L-JL	Professional calibration services	Provide metrological calibration services and provide metrological reports
17.	S3674L -EWT1	Extended warranty for 1 year	Beyond the warranty period, the warranty is extended for 1 year, and the two-year extended warranty is optional for 2 items, and so on.

The S3674N Vector Network Analyzer Option (10 MHz ~ 90 GHz)

No.	Model	Name	Function
1.	S3674N-400	4-port Measurement Option	Dual source excitation four-port vector network analyzer configuration with frequency range 10 MHz to 90 GHz.
2.	S3674N -EWT1	Extended warranty for 1 year	Beyond the warranty period, the warranty is extended for 1 year, and the two-year extended warranty is optional for 2 items, and so on.

The S3674P Vector Network Analyzer Option (4-port) (10 MHz ~ 110 GHz)

No.	Model	Name	Function
1.	S3674P -EWT1	Extended warranty for 1 year	Beyond the warranty period, the warranty is extended for 1 year, and the two-year extended warranty is optional for 2 items, and so on.