

SPA-18-40-10 Solid State Power Amplifier

(18GHz - 40GHz, 10W)

Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Forward/reverse power monitoring
- Extremely load-resistant
- Over voltage, over temperature, over current protection
- Optional overdrive protection
- CE, RoHS certification



Overview

Saluki SPA-18-40-10 is a solid-state RF power amplifier with an output frequency of 18GHz to 40GHz and an output power of 10W. Its design is based on the most advanced GaN technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

Technical Specifications


| SPA-18-40-10 | | | |
|-----------------|-----------------|-----------------|---------------|
| Frequency Range | 18GHz - 40GHz | Input Power | 0dBm (max.) |
| Output Power | 10W (min.) | Harmonic | -15dBc (typ.) |
| Gain | 40dB (min.) | Spurious | -60dBc (max.) |
| Gain Flatness | ± 5dB (max.) | Input VSWR | 1.5:1 (typ.) |
| Adjustable Gain | 15dB (max.) | VSWR Protection | 3:1 |
| Input Port | 2.92mm (female) | Output Port | WRD180 |

SPA-18-40-10 Solid State Power Amplifier

(18GHz - 40GHz, 10W)

| | | | |
|--------------------------------|------------|---------------------|-------------------------|
| Communication Interface | RS485, LAN | Power Supply | AC 220V±10%, 50/60Hz |
| Dimension | 19", 3U | Impedance | 50 ohm |
| Operating Temperature | 0 - 50°C | Cooling Type | Air cooling |

Outline Structure

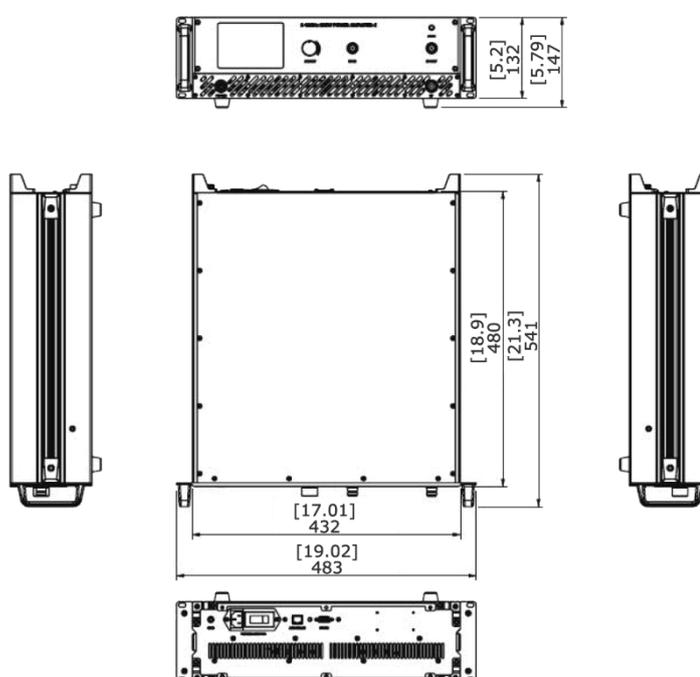

Options

| Module No. | Item |
|------------|----------------------|
| 001 | Overdrive protection |
| 002 | GPIB interface |

Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.