

SPA-9K-250M-400 Solid State Power Amplifier

(9kHz - 250MHz, 400W)

Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Forward/reverse power monitoring
- Extremely load-resistant
- Over voltage, over temperature, over current protection
- Optional overdrive protection
- CE, RoHS certification



Overview

Saluk SPA-9K-250M-400 is a solid-state RF power amplifier with an output frequency of 9kHz to 250MHz and an output power of 400W. Its design is based on the most advanced LDMOS technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

Technical Specifications

SPA-9K-250M-400			
Frequency Range	9kHz - 250MHz	Adjustable Gain	15dB (max.)
Output Power	400W (min.)	Input Power	0dBm (max.)
Gain	56dB (min.)	Harmonic	-20dBc (typ.)
Gain Flatness	± 3dB (max.)	Spurious	-60dBc (max.)
Input VSWR	1.5:1 (typ.)	Impedance	50 ohm

No.367, Fuxing N. Rd.,105 Taipei,Taiwan Tel: +886. 909 602 109

sales@salukitec.com www.salukitec.com




SPA-9K-250M-400 Solid State Power Amplifier

(9kHz - 250MHz, 400W)

Input Port	Type-N (female)	Output Port	Type-N (female)
Communication Interface	RS485, LAN	Power Supply	AC 220V±10%, 50/60Hz
Dimension	19", 4U	Cooling Type	Air cooling
Operating Temperature	0 - 50°C		

Outline Structure

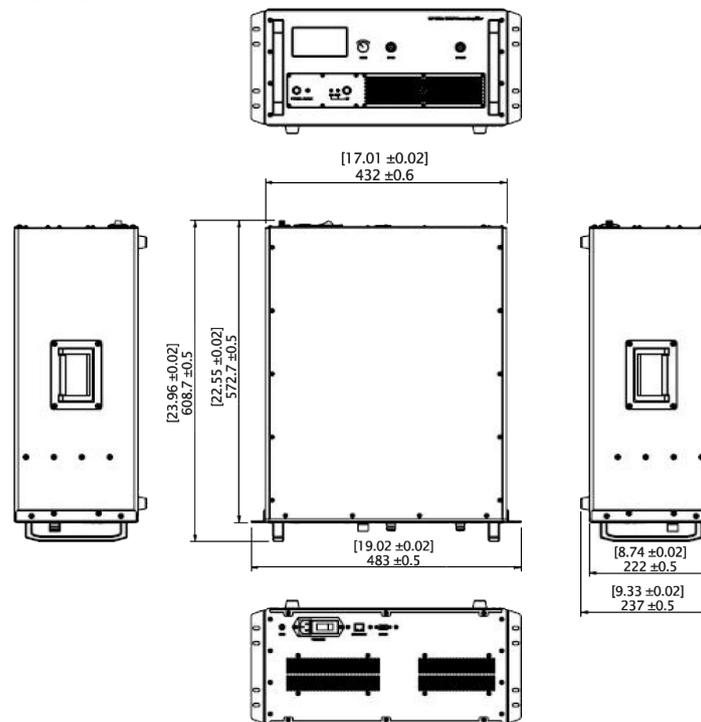

Options

Module No.	Item
001	Overdrive protection
002	GPIB interface

Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.

No.367, Fuxing N. Rd.,105 Taipei,Taiwan Tel: +886. 909 602 109

sales@salukitec.com www.salukitec.com