

# NMD 1.85mm Test Port Adapters

(DC - 50GHz / 67GHz)

## Key Features

- Frequency Range up to 67GHz
- Multiple connector types
- Maximum VSWR 1.35:1
- Durability >2000 cycles
- RoHS compliant



## Overview

Saluki NMD test port adapters is a ruggedized test port connector used for stable connection to VNA or any NMD style test port. These adapters can provide connection between or adapt to cable assemblies and devices. The rugged construction makes the connection very stable and repeatable.

## Electrical Specifications

P/N	SA67FM(N1.85-N1.85)	SA50FM(N1.85-N2.4)	SA67FF(N1.85-1.85)
Connector 1	NMD 1.85mm female	NMD 1.85mm female	NMD 1.85mm female
Connector 2	NMD1.85mm male	NMD2.4mm male	1.85mm female
Frequency Range	DC - 67GHz	DC - 50GHz	DC - 67GHz
VSWR (Max.)	1.35:1	1.25:1	1.35:1
Impedance	50Ω		

*Note: For other port configuration, please send email to [sales@salukitec.com](mailto:sales@salukitec.com)*

## Material Specifications

Body Type	Straight
Housing	SU303, Polished & Passivated
Center Conductor	Beryllium copper, Gold plated
Dielectric Type	PEEK
Temperature Range	-55° C to 165° C

No.367, Fuxing N. Rd.,105 Taipei,Taiwan Tel: +886. 909 602 109




[sales@salukitec.com](mailto:sales@salukitec.com) [www.salukitec.com](http://www.salukitec.com)



# NMD 1.85mm Test Port Adapters

(DC - 50GHz / 67GHz)

## Drawings

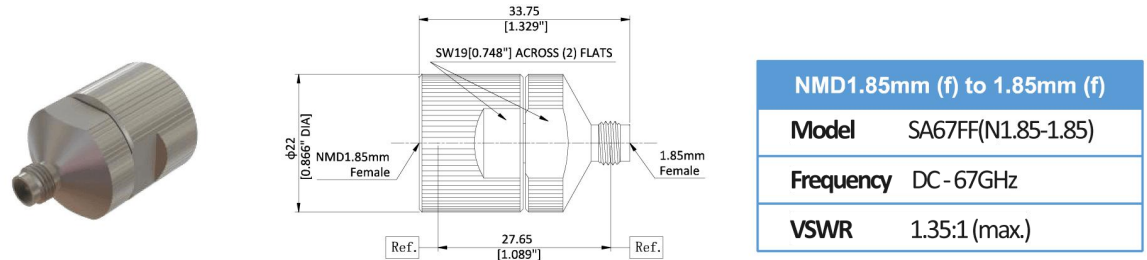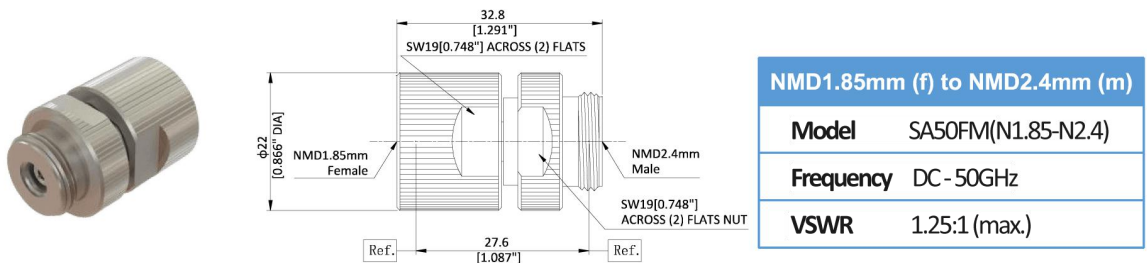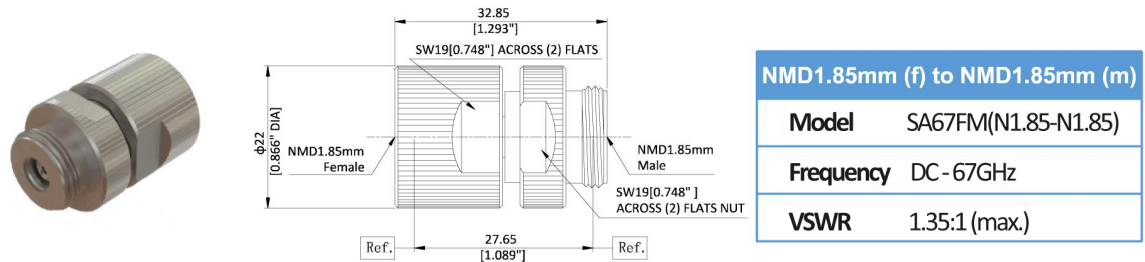

**Note:** Information will conduct the necessary updates , the contents of this document are subject to change without notice