

SPA-18-40-10 Solid State Power Amplifier

(18GHz - 40GHz, 10W)

Key Features

- Multi-octave broadband performance
- High output power
- Wide dynamic range
- High-efficiency GaN technology
- Low power consumption
- Low spurious signal
- Forward/reverse power monitoring
- Extremely load-resistant
- Over voltage, over temperature, over current protection
- Optional overdrive protection
- CE, RoHS certification



Overview

Saluki SPA-18-40-10 is a solid-state RF power amplifier with an output frequency of 18GHz to 40GHz and an output power of 10W. Its design is based on the most advanced GaN technology in the industry, and its power output is efficient and reliable. It is mainly used for testing and measuring instruments, Communication or interference, aviation control and other fields. The product has functions such as temperature and current detection, alarm protection and so on.

Technical Specifications


SPA-18-40-10			
Frequency Range	18GHz - 40GHz	Input Power	0dBm (max.)
Psat	10W (min.)	Harmonic	-10dBc (max.) (< 20dBc(20 to 40GHz))
Gain	48dB (min.)	Spurious	-60dBc (max.)
Gain Flatness	± 6dB (max.)	Input VSWR	2:1 (max.)
Adjustable Gain	15dB	Output Port	24JS18000,front panel
Input Port	2.92mm,front panel		

SPA-18-40-10 Solid State Power Amplifier

(18GHz - 40GHz, 10W)

Dimension	3U	Power Supply	AC 220V±10%, 50/60Hz
Operating Temperature	0 - 50 °C	Impedance	50 ohm
Cooling Type	Air cooling		

Outline Structure

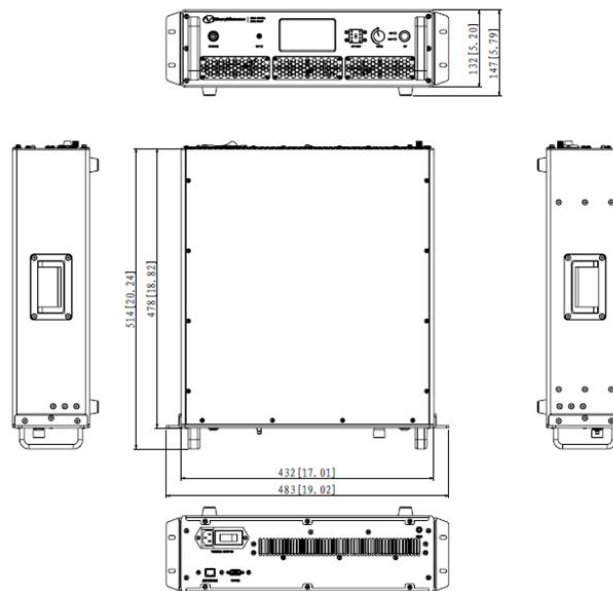

Options

Module No.	Item
001	GPIB interface

Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.